



## **AIRTRONIC**

# EBERSPÄCHER AIR HEATERS - INSTANT HEAT

Air heaters provide the required heat very quickly and are therefore especially well-suited for transporters, personnel carriers and workshop vehicles – as well as for freight compartments and driver's cabs on trucks. Our product portfolio is suitably wide-ranging. In addition to the tried-and-tested Airtronic models for various different outputs that work extremely quietly and with very low consumption. The Airtronic D4 Plus has been specially developed for vehicles with long heating air routes and complex heat control systems. To put it briefly, Eberspächer Airtronic – comfort in any vehicle.

#### EBERSPÄCHER AIRTRONIC:

- Extremely fast compartment air heating after a hot start.
- Low energy consumption ideal for long heating periods in stationary vehicles.
- Low fuel consumption.
- Pre-selectable compartment temperature.
- High degree of comfort due to wide control range and the lowest Low setting on the market.
- Continuously variable compartment temperature control.
- Very low noise levels due to continually adjustable control of the blower speed.
- Internal and external installation possible.
- Constant function monitoring.
- Safety and diagnostic system.
- Low maintenance and easy to service.
- All Eberspächer heaters have EU type approval and are also GS-inspected.







## TECHNICAL DATA


# AIRTRONIC - THE RIGHT HEATER FOR EVERY NEED

#### EBERSPÄCHER AIRTRONIC В Airtronic D2 Airtronic D4\* Airtronic D4 Plus\* **Gasoline Version Diesel Version** with 60mm Hood with 90mm Hood with 75mm Hood Voltage Volt 12 / 24 12 / 24 12 / 24 Medium Controls Low Medium High Power Low Medium High Power Low High Power 1,200 Heat Output Watt 850 1,800 2,200 900 2,000 3,000 4,000 900 2,000 3,000 4,000 Air Flow Volume kg / h 40 60 90 105 60 110 185 100 140 175 150 55 **Electrical Power Consumption** Watt 8 34 7 40 7 30 55 12 22 13 24 16 **Fuel Consumption** I/h 0.10 0.28 0.11 0.25 0.38 0.51 0.11 0.25 0.51 0.15 0.23 0.38 Dimensions L x W x H 310 x 115 x 122 376 x 140 x 150 376 x 140 x 150 mm Weight 4.5 4.5 2.7

 $<sup>^{\</sup>star}100\%$  biodiesel-compatible in accordance with FAME DIN EN 14214.

### HOW THE AIRTRONIC D2 AIR HEATER WORKS

Combustion air from the environment and fuel from the vehicle tank are mixed and ignited in the combustion chamber. Fresh or recirculated air is heated by the thermal energy and fed into the cab.

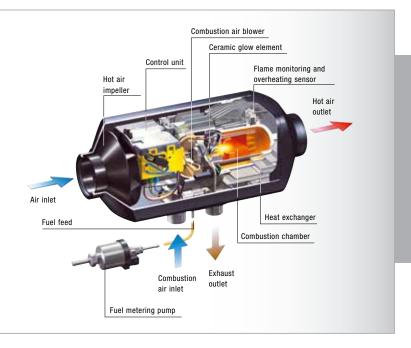



 $<sup>^{\</sup>star}100\%$  biodiesel-compatible in accordance with FAME DIN EN 14214.

# Konformitätserklärung Declaration of Conformity



J. Eberspächer GmbH & Co. KG Eberspächerstraße 24 D-73730 Esslingen Telefon (zentral)

Telefon (zentral) (07 11) 9 39-00

www.eberspaecher.com

Der Hersteller (Manufacturer)

Name (name):

J. Eberspächer GmbH & Co. KG

Anschrift (address):

Eberspächerstraße 24, D-73730 Esslingen

erklärt hiermit, dass folgendes Produkt: (declares, that following product):

Produktbezeichnung / title of product:

Typ / type:

Ausführung(en) / version(s):

Fahrzeugheizgerät

Airtronic M

B3 Plus, B4, D3S, D3 Plus,

D4, D4S, D4 Plus

die Anforderungen folgender EG-Richtlinien erfüllt: (fullfills the requirements of following EU-Directives):

a) Heizgeräterichtlinie 2001/56/EG Änderungsstand: 2006/119/EG b) EMV von Fahrzeugen 72/245/EWG Änderungsstand: 2006/28/EG

c) Heizgeräteregelung ECE-R 122 Änderung 00 d) EMV von Fahrzeugen ECE-R 10 Änderung 03

Zur Beurteilung des Erzeugnisses wurden folgende Richtlinien herangezogen: *(used Standards)*:

2001/56/EG; 72/245/EWG; ECE-R 10; ECE-R 122

Esslingen den 5. Januar 2012

Dr. Klaus Beetz

Geschäftsführer Fahrzeugheizungen

Uwe Kohle

Léiter Entwicklung Fahrzeugheizungen