




Bushing unpacking and lifting



Open the crate and remove the rafters
Check all material against packing list
Remove all components




Check / Remove all the documents

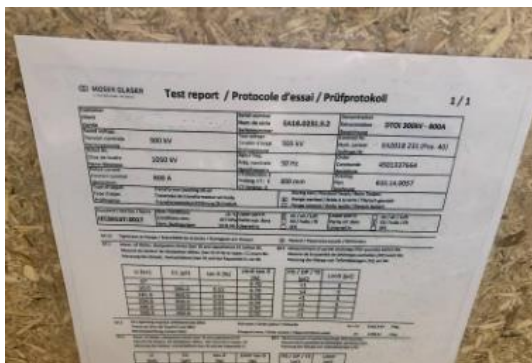

Open the protective foil and slip it off up to the flange.
Fix eyebolts on the top of the bushing and on the flange.
Small bushing can be lifted by hand.

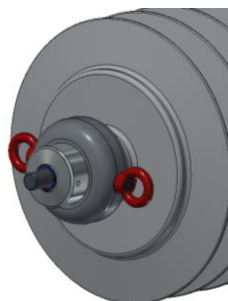


or

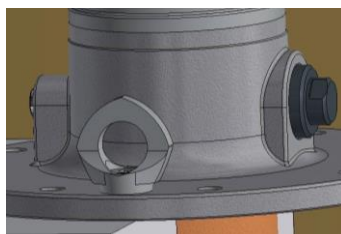




Use slings and fix them on the eyebolts – Lift the bushing with a crane

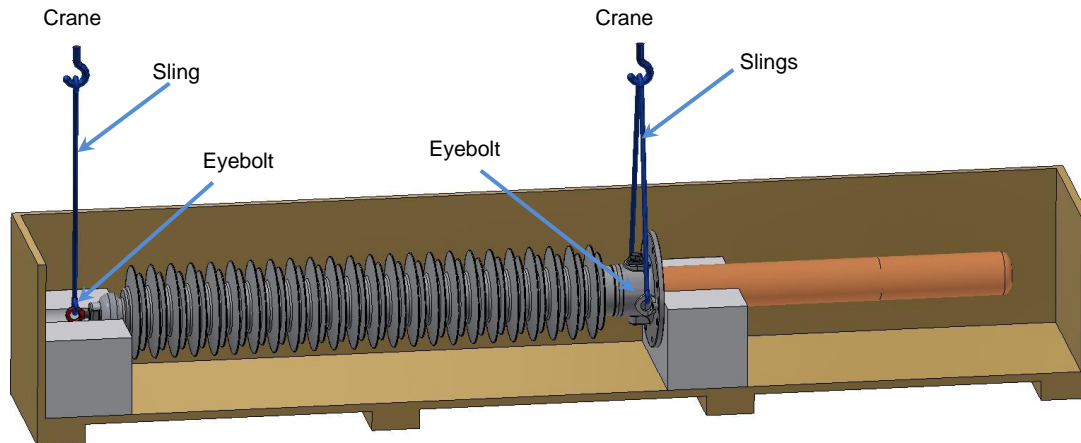

Average bushing could be supported by hand on the oil side

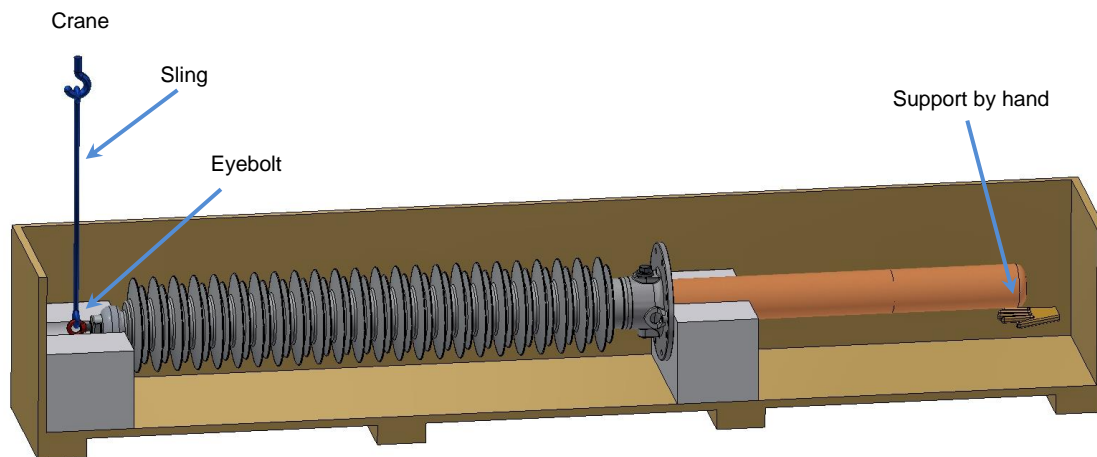

Lifting the bushing vertically
Don't remove the protections until assembling the bushing on the transformer

