



SPECIFICATION

LED Steet Light



Model Number

SLC-30W
SLC-150W

SLC-50W
SLC-200W

SLC-100W
SLC-250W

Features

- ◎ Use high epistar high CRI COB chip, life span 50,000 hours, 2Years Guarantee
- ◎ 90-270VAC Widely input Voltage
- ◎ Application places: roads, parks, etc
- ◎ the light, convenient transportation and installation



Basic parameter

Item Number	LED Type	IP Grade	Product Size	N.W.
SLC-30W	COB*1PCS	IP65	350*150*45mm	0.7kg
SLC-50W	COB*1PCS	IP65	435*180*95mm	0.74kg
SLC-100W	COB*2PCS	IP65	600*210*71mm	1.4kg
SLC-150W	COB*3PCS	IP65	680*230*73mm	2.05kg
SLC-200W	COB*4PCS	IP65	800*250*73mm	2.8g
SLC-250W	COB*5PCS	IP65	1100*360*80mm	7.8kg

Electrical parameter

Model	Power	Input voltage	Efficiency(%)	Power Factor	Certificate
SLC-30W	30W	90-270VAC 50-60Hz	> 90%	> 0.90	CE ROHS
SLC-50W	50W	90-270VAC 50-60Hz	> 90%	> 0.90	CE ROHS
SLC-100W	100W	90-270VAC 50-60Hz	> 90%	> 0.90	CE ROHS
SLC-150W	150W	90-270VAC 50-60Hz	> 90%	> 0.90	CE ROHS
SLC-200W	200W	90-270VAC 50-60Hz	> 90%	> 0.90	CE ROHS
SLC-250W	250W	90-270VAC 50-60Hz	> 90%	> 0.90	CE ROHS





Optical parameter

Model	CCT(K)	Luminous Efficiency	Beam angle	IK	Rendering Index
SLC-30W	2700-6500K	80-90 LM/W	120 Degree	IK 09	> 80
SLC-50W	2700-6500K	80-90 LM/W	120 Degree	IK 09	> 80
SLC-100W	2700-6500K	80-90 LM/W	120 Degree	IK 09	> 80
SLC-150W	2700-6500K	80-90 LM/W	120 Degree	IK 09	> 80
SLC-200W	2700-6500K	80-90 LM/W	120 Degree	IK 09	> 80
SLC-250W	2700-6500K	80-90 LM/W	120 Degree	IK 09	> 80







Photometrics





SLC-50W

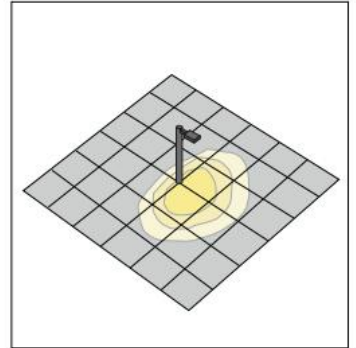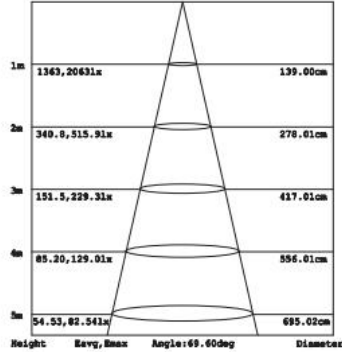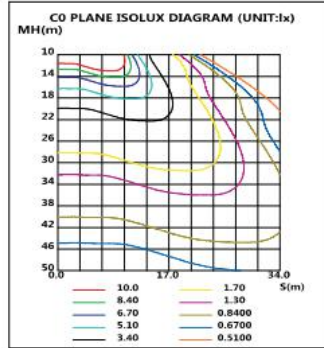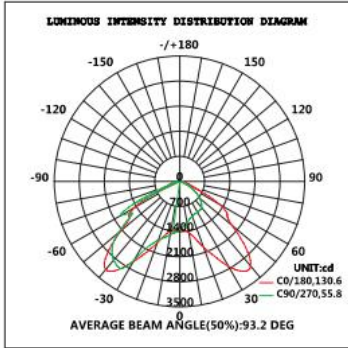





SLC-100W

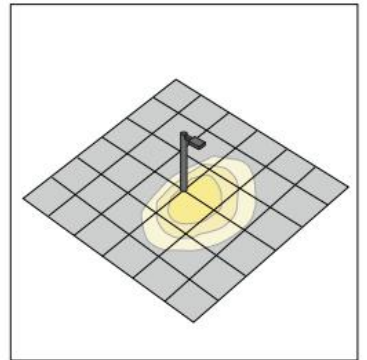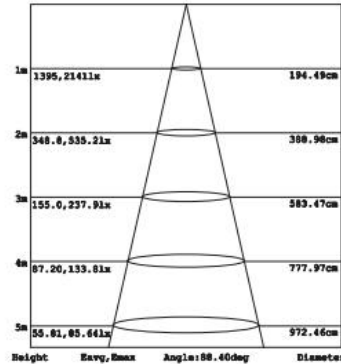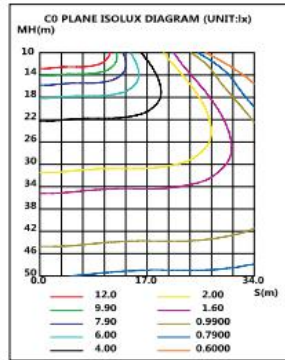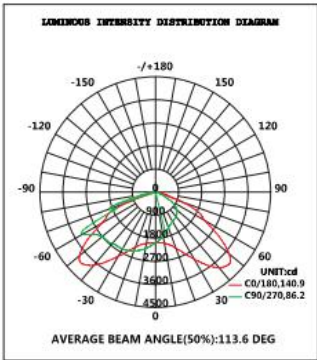

SLC-150W

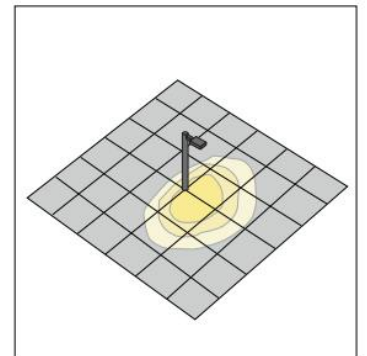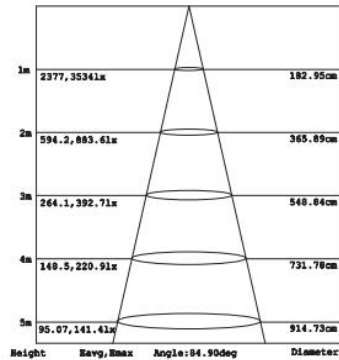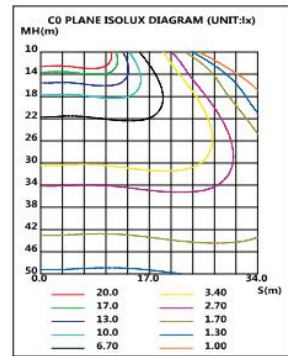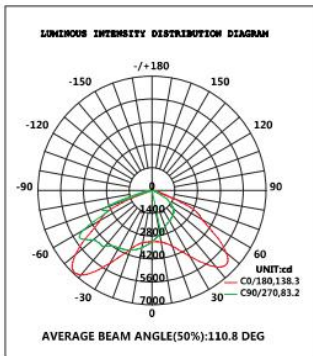

SLC-200W

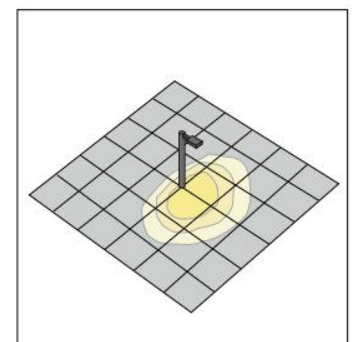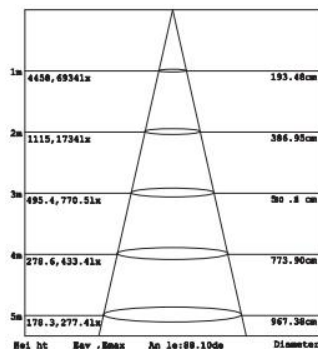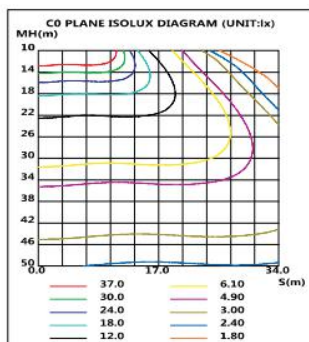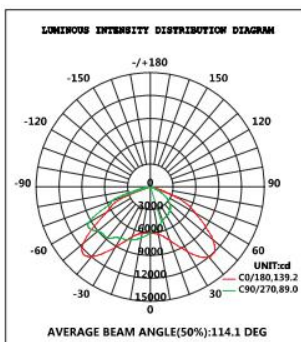



Fujian JieXin Electronic & Technology Co., Ltd.

Business manager: Vincent Wong
<https://jiexin-et.en.alibaba.com/>

E-mail:vincent@jx-ledlight.com
Skype:weng810604

TEL:86-591-38773189
Whatsapp:+8618659166189

Packaging

Model	Materials	Carton size (cm)	Qty/Ctn (PCS)	G.W. (KG)
SLC-30W	Cartons	51.5*43.5*33.5	8pcs/ctn	8.5kg
SLC-50W		45*19*9.5	1pcs/ctn	0.74kg
SLC-100W		63*22*9.5	1pcs/ctn	1.4kg
SLC-150W		700*240*95	1pcs/ctn	2.05kg
SLC-200W		81.5*28*10	1pcs/ctn	2.8kg
SLC-250W		115*36*11.5	1pcs/ctn	7.8kg

Storage Conditions

Storage temperature	-40℃~+80℃
Operating temperature	-20℃~+60℃ (the best in 25℃)
Environment humidity	40-90%RH

Life and Warranty

Life Span	50,000H(Luminance decrease is less than 30%)
Quality Warranty	2 years

Instruction

1. Lamps and lanterns should be installed by a qualified electrician, electrical wiring conforms to the IEE standards or national standards;
2. This product is suitable for outdoor.
3. Do not under the condition of voltage too high or too low, use for a long time, will affect the normal use function and life;
4. Not installed in the fuel use, no matter what circumstances, lamps and lanterns can't are covered with insulating material or similar material.
5. When install, replace, clean lamps and lanterns, must cut off power supply, ensure the personal safety;
6. When found abnormal work of lamps and lanterns (self-extinguishing, flash), please check the attachment plug contact performance, and the power supply voltage is normal, if normal, fault has not ruled out, need to change the new light;
7. Need to clean the surface of lamps and lanterns, please disconnect the power supply! Dry with soft cloth glued soapy water after cleaning, wipe with dry cloth again, please don't use banana oil wait to wipe the surface of lamps and lanterns of volatile substances, please do not spraying the lamps and lanterns of any chemicals, lamps and lanterns may change color or otherwise damage.