

YOU WE
LOVE LIFE



yuwell

JIANGSU YUYUE MEDICAL EQUIPMENT & SUPPLY CO., LTD

Manufacturing Address: No.1 Baisheng Road, Development Zone, Danyang, Jiangsu Province, P.R.China

Tel: 86-0511-8690 0859 86-0511-8690 0860

E-mail: yuwellsales@yuyue.com.cn; sales@yuyue.com.cn

www.yuwell.com

f | t | in | @ | Yuwell Global

2023, Yuyue medical, all rights reserved. The "yuwell", yuwell, the yuwell logo and name are trademarked by Jiangsu Yuyue Medical Equipment & Supply Co., Ltd, and may not be distributed, modified, reproduced in whole or in part without the prior. All specifications and product configurations are subject to change without notification.

CATALOG HOMECARE PRODUCTS

yuwell

CONTENTS

Electric Wheelchair	01
Wheelchair	07
Nursing Wheelchair	15
Economical Wheelchair	17
Transport Chair	20
Mattresses with Mechanical Pump	23
Anti-decubitus Mattress	27
Anti-decubitus Seat	28
Tractor for Neck Ache	35
Overbed Table	29
Walking Aid	30
Walking Stick&crutch	31
Commode chair	33

Electric Wheelchair


6 National Patents
NEW



D130AL


Foldable aluminum frame, fixed armrest, fixed legrest, foldable backrest, powerful motor, comfortable riding, Manual and electric dual mode, 9 national patents, Safe and reliable electromagnetic brake

Carton size: 1080 × 445 × 765mm
Container QTY(20GP): 65 PCS (Approx)
Container QTY(40HQ): 170 PCS (Approx)

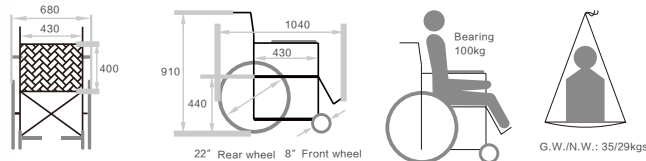

Technical Parameters

Product Type: Outdoor model	Maximum Speed: ≤6km/h
Operation environment temperature: -25° C~+50° C	Minimum Turning Radius: 1.2m
Load Capacity: ≤100kg	Horizontal Brake Performance: ≤1.5m
Endurance Mileage: ≥20km	Maximum Safe Ramp Brake: ≤3.6m (6°)
Battery: lithium battery DC 24V × 18Ah	
Obstacle Clearance Height: ≥40mm	Groove Clearance Width: 100mm
Gradeability: ≥6°	Hill-holding Performance: 9°
Static Stability: ≥9°	Dynamic Stability: ≥6°
The above parameters are subject to change due to the rider's weight, road conditions and battery use.	

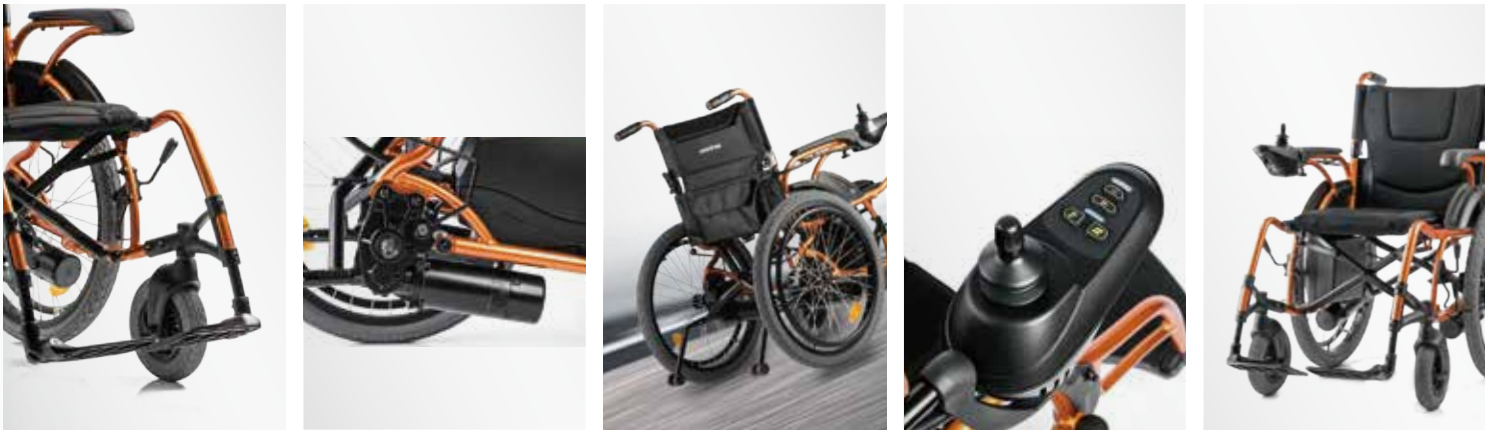

Comfortable Driving

- Ergonomic design relieves fatigue
- Expandable arm rest
- Flexible shock-proof suspension

Powerful

- Efficient energy-saving motor
- High-precision gearbox
- Fast and stable starting

Triple Protection

- Electromagnetic brake
- Gear self-lock protection

Intelligent Control

- Intelligent controller
- Manual/Electric mode for easy clutch switching


Stylish Model

- Smooth line design
- Dynamic guard plate
- Split fixed seat
- Patented arc-shaped foot rest

D130HL

Foldable aluminum frame, fixed armrest, swing away legrest, foldable backrest, powerful motor, comfortable riding, Manual and electric dual mode, 4 national patents, Safe and reliable electromagnetic brake

Carton size: 760 × 410 × 780mm
Container QTY(20GP): 100 PCS (Approx)
Container QTY(40HQ): 260 PCS (Approx)

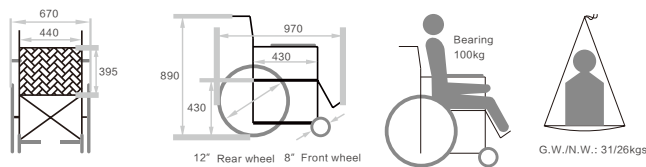




D130EL

Foldable aluminum frame, fixed armrest, swing away legrest, quick release battery case, lighting lamp, USB charging, powerful motor, comfortable riding, Manual and electric dual mode, Safe and reliable electromagnetic brake

Carton size: 650 × 500 × 770mm
Container QTY(20GP): 95 PCS (Approx)
Container QTY(40HQ): 250 PCS (Approx)

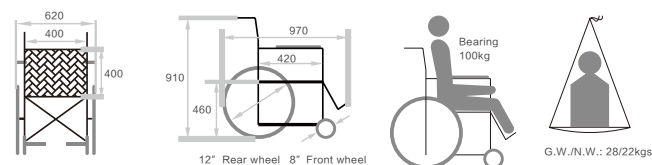

● Quick release battery case



● Lighting lamp



● USB charging



• **Extra wide tires**
Anti-skid, Outstanding gripping power



• **Aerofoil foam armrests**
Fatigue-reducing



• **Patented supporting backrest**
Fits the human back curve, extraordinary comfort



• **Breathable fabrics**
Lounge-style, feel home anywhere you go




• **Intelligent operation**
Clear display, LED headlights, USB port



D130FL

Foldable aluminum frame, fixed armrest, swing away legrest, quick release battery case, lighting lamp, USB charging, powerful motor, comfortable riding, Manual and electric dual mode, Safe and reliable electromagnetic brake

Carton size: 600 × 480 × 980mm
Container QTY(20GP): 85 PCS (Approx)
Container QTY(40HQ): 220 PCS (Approx)

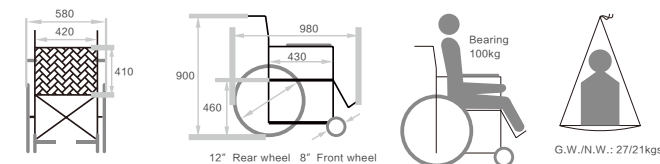

Technical Parameters


Product Type: Outdoor model	Maximum Speed: ≤6km/h
Operation environment temperature: -25° C~+50° C	Minimum Turning Radius: 1.2m
Load Capacity: ≤100kg	Horizontal Brake Performance: ≤1.5m
Endurance Mileage: ≥20km	Maximum Safe Ramp Brake: ≤3.6m (6°)
Battery: lithium battery DC 24V × 12Ah	
Obstacle Clearance Height: ≥40mm	Groove Clearance Width: 100mm
Gradeability: ≥6°	Hill-holding Performance: 9°
Static Stability: ≥9°	Dynamic Stability: ≥6°
The above parameters are subject to change due to the rider's weight, road conditions and battery use.	

D210B/D210BL


Foldable aluminum frame, fixed armrest, swing away legrest, foldable backrest, powerful motor, comfortable riding, Manual and electric dual mode, 1 national patents, Safe and reliable electromagnetic brake

Carton size: 760 × 520 × 760mm
Container QTY(20GP): 80 PCS (Approx)
Container QTY(40HQ): 210 PCS (Approx)

D210B (lead acid battery)

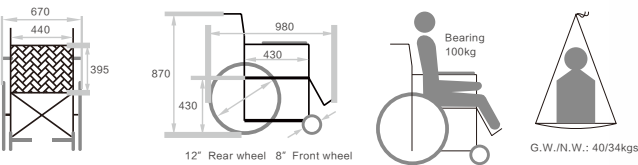

D210BL (lithium battery)

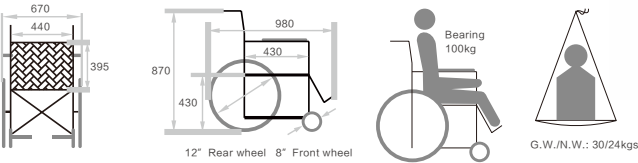

Technical Parameters


Product Type: Outdoor model	Maximum Speed: ≤6km/h
Operation environment temperature: -25° C~+50° C	Minimum Turning Radius: 1.2m
Load Capacity: ≤100kg	Horizontal Brake Performance: ≤1.5m
Endurance Mileage: ≥20km	Maximum Safe Ramp Brake: ≤3.6m (6°)
Battery: lithium battery DC 24V × 18Ah; lead acid battery DC 24V × 20Ah	
Obstacle Clearance Height: ≥40mm	Groove Clearance Width: 100mm
Gradeability: ≥6°	Hill-holding Performance: 9°
Static Stability: ≥9°	Dynamic Stability: ≥6°
The above parameters are subject to change due to the rider's weight, road conditions and battery use.	

D210D/D210DL


Foldable steel frame, adjustable armrest, swing away legrest, foldable backrest, powerful motor, comfortable riding, Manual and electric dual mode, 4 national patents, Safe and reliable electromagnetic brake

Carton size: 725 × 520 × 840mm
Container QTY(20GP): 75 PCS (Approx)
Container QTY(40HQ): 200 PCS (Approx)

D210D (lead acid battery)

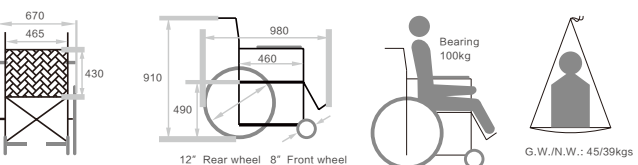


D210DL (lithium battery)

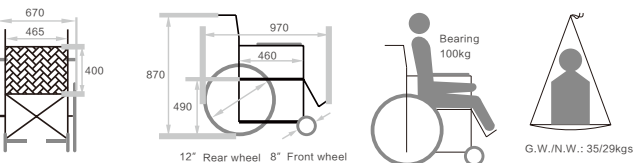

Technical Parameters


Product Type: Outdoor model	Maximum Speed: ≤6km/h
Operation environment temperature: -25° C~+50° C	Minimum Turning Radius: 1.2m
Load Capacity: ≤100kg	Horizontal Brake Performance: ≤1.5m
Endurance Mileage: ≥20km	Maximum Safe Ramp Brake: ≤3.6m (6°)
Battery: lithium battery DC 24V × 18Ah; lead acid battery DC 24V × 20Ah	
Obstacle Clearance Height: ≥40mm	Groove Clearance Width: 100mm
Gradeability: ≥6°	Hill-holding Performance: 9°
Static Stability: ≥9°	Dynamic Stability: ≥6°
The above parameters are subject to change due to the rider's weight, road conditions and battery use.	

Wheelchair

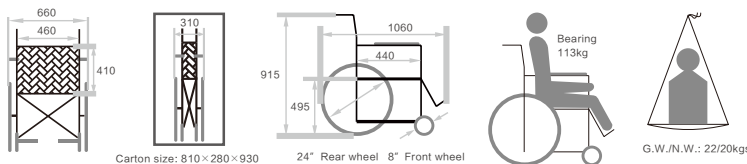

E1

Frame: Aluminium
Surface treatment: Stoving varnish surface
Seat & back cushion cover: Oxford + sandwich mesh fabric cover
Specifications: 4 directions adjustable armrest, Swing away legrest, 6 degrees angle adjustable and foldable backrest, Adjustable sitting height and depth, front suspension, Anti-tip Specification
Tyre: 8" front wheel, 24" quick release rear wheel
Optional: Aluminum drum brake, orthopedic group, headrest
Container QTY(20GP): 110 PCS (Approx)
Container QTY(40HQ): 300 PCS (Approx)

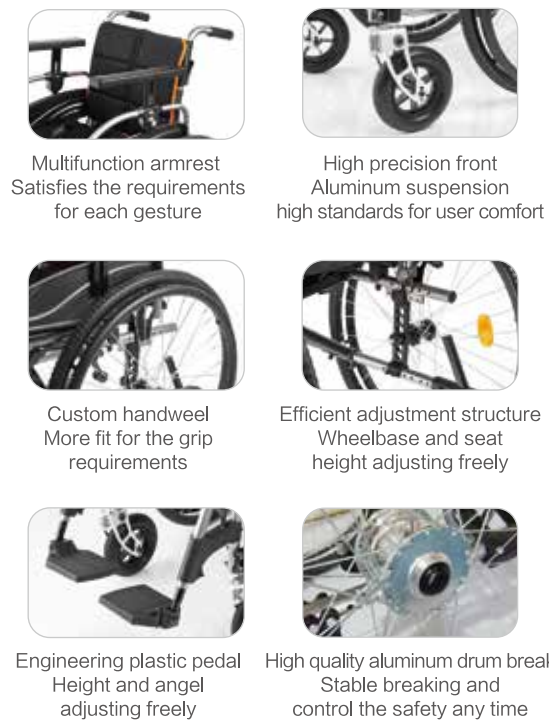

Multifunction armrest
Satisfies the requirements for each gesture

High precision front
Aluminum suspension
high standards for user comfort

Custom handwheel
More fit for the grip requirements

Efficient adjustment structure
Wheelbase and seat height adjusting freely

Engineering plastic pedal
Height and angel adjusting freely

High quality aluminum drum brake
Stable breaking and control the safety any time



Accurate floding back,
smaller folding capacity



Reversible armrest, more
convenient to move up
and down



Comfortable hand
wheel, easier to operate



Breathable padded
cushion, more convenient
to detach and wash



Oxford cushion design,
more solid and breathable




Swing away legrest,
smaller storage volume



H065C


Frame: Aluminium
Surface treatment: Spraying Plastics surface
Seat & back cushion cover: Oxford + sandwich mesh fabric cover
Specifications: Reversible armrest, Swing away legrest, Foldable backrest, Detachable seat pad and back pad
Tyre: 8" front wheel, 24" rear wheel
Container QTY(20GP): 125 PCS (Approx)
Container QTY(40HQ): 335 PCS (Approx)

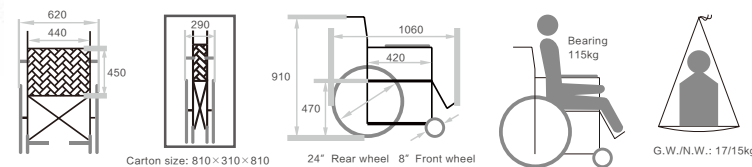




H066C

Frame: Aluminium
 Surface treatment: Stoving varnish surface
 Seat & back cushion cover: Oxford + sandwich mesh fabric cover
 Specifications: Fixed armrest, Reversible legrest, Foldable backrest, Detachable seat pad and back pad, Auxiliary brake
 Tyre: 6" front wheel, 14" rear wheel
 Container QTY(20GP): 150 PCS (Approx)
 Container QTY(40HQ): 430 PCS (Approx)

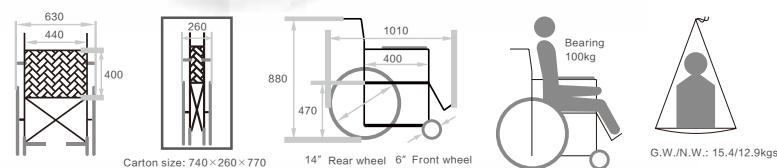


EC02

Frame: Aluminium
 Surface treatment: Spraying Plastics surface
 Seat & back cushion cover: Canvas cover
 Specifications: 4 directions adjustable armrest, Reversible and detachable armrest tube, Swing away legrest, Fixed backrest, Aluminum drum brake, Auxiliary brake
 Tyre: 8" front wheel, 24" quick release rear wheel
 Container QTY(20GP): 100 PCS (Approx)
 Container QTY(40HQ): 275 PCS (Approx)

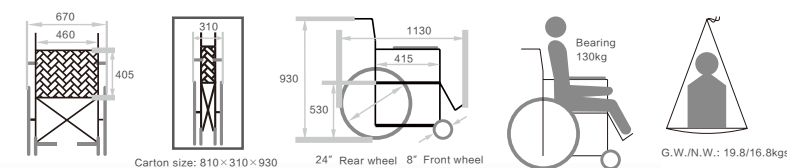


H067C

Frame: Aluminium
 Surface treatment: Stoving varnish surface
 Seat & back cushion cover: Oxford + sandwich mesh fabric cover
 Specifications: Fixed armrest, Reversible legrest, Foldable backrest, Detachable seat pad and back pad, Auxiliary brake
 Tyre: 6" front wheel, 20" rear wheel
 Container QTY(20GP): 130 PCS (Approx)
 Container QTY(40HQ): 340 PCS (Approx)

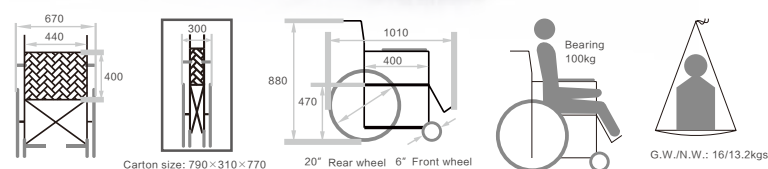

TC01


Frame: Aluminium
 Surface treatment: Stoving varnish surface
 Seat & back cushion cover: Tannin cover with cushion
 Specifications: Reversible and detachable armrest, Swing away legrest, Foldable backrest
 Tyre: 8" front wheel, 24" quick release rear wheel
 Container QTY(20GP): 100 PCS (Approx)
 Container QTY(40HQ): 270 PCS (Approx)

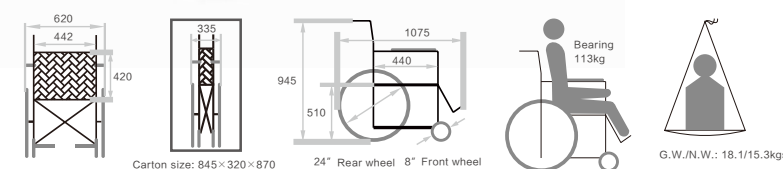




TC04

Frame: Aluminium
 Surface treatment: Stoving varnish surface
 Seat & back cushion cover: Canvas cover
 Specifications: Fixed armrest, Swing away legrest, Foldable backrest
 Tyre: 7" front wheel, 24" quick release rear wheel
 Container QTY(20GP): 115 PCS (Approx)
 Container QTY(40HQ): 310 PCS (Approx)

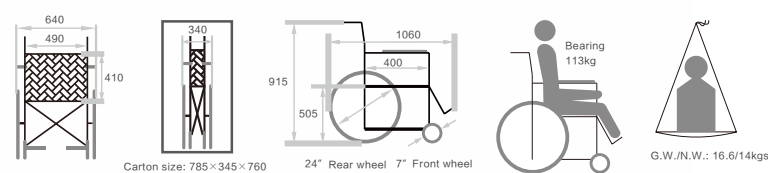


K2

Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion cover: Leather cover
 Specifications: Detachable armrest, Swing away legrest, Elevating Legrests, Fixed backrest
 Tyre: 8" front wheel, 24" plastics rear wheel
 Container QTY(20GP): 100 PCS (Approx)
 Container QTY(40HQ): 275 PCS (Approx)

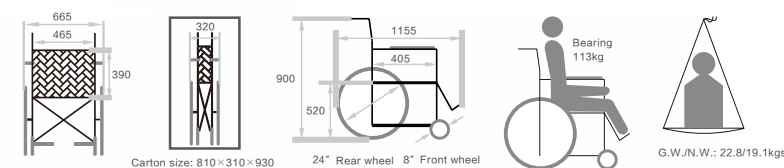


K1

Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion cover: Leather cover
 Specifications: Fixed armrest, Swing away legrest, Fixed backrest
 Tyre: 8" front wheel, 24" plastics rear wheel
 Container QTY(20GP): 110 PCS (Approx)
 Container QTY(40HQ): 300 PCS (Approx)

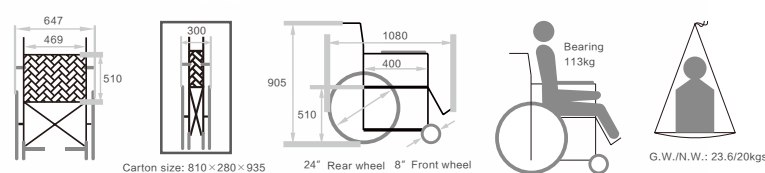

K3


Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion cover: Canvas cover
 Specifications: Detachable armrest, Swing away legrest, Fixed backrest
 Tyre: 8" front wheel, 24" plastics rear wheel
 Container QTY(20GP): 100 PCS (Approx)
 Container QTY(40HQ): 275 PCS (Approx)

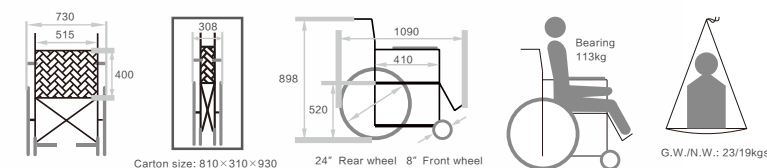




K4

Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion cover: Canvas cover
 Specifications: Reversible armrest, Swing away legrest,
 Height adjustable backrest
 Tyre: 8" front wheel, 24" plastics rear wheel
 Container QTY(20GP): 100 PCS (Approx)
 Container QTY(40HQ): 280 PCS (Approx)

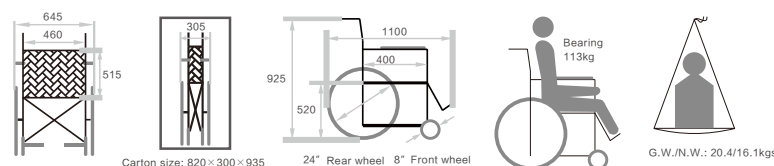


K7

Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion cover: Leather cover
 Specifications: Detachable armrest, Swing away
 legrest, Elevating Legrests, Fixed backrest, Capacity:
 500lbs (227kgs)
 Tyre: 8" front wheel, 24" rear wheel
 Container QTY(20GP): 90 PCS (Approx)
 Container QTY(40HQ): 250 PCS (Approx)

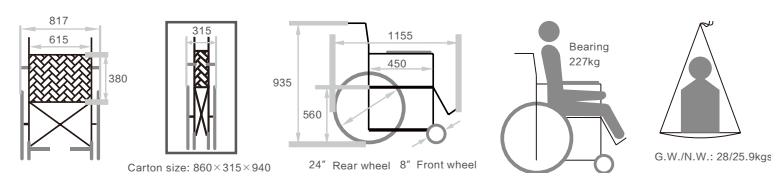

SE28

Frame: Steel
 Surface treatment: Electroplate surface
 Seat & back cushion cover: Canvas cover
 Specifications: Detachable armrest, Swing away
 legrest, Capacity: 500lbs (226kgs), Seat width:
 26", 28", 30"
 Tyre: 8" front wheel, 24" rear wheel
 Container QTY(20GP): 80 PCS (Approx)
 Container QTY(40HQ): 230 PCS (Approx)

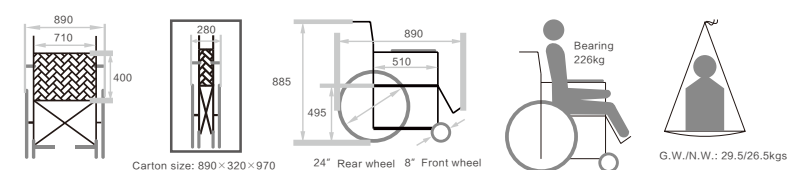


Nursing Wheelchair




H003B

Frame: Aluminium
 Surface treatment: Oxidized surface
 Seat & back cushion cover: Leather cover
 Specifications: Fixed armrest, Fixed legrest, Fixed backrest, Commode
 Tyre: 7" front wheel,24"rear wheel
 Container QTY(20GP): 70 PCS (Approx)
 Container QTY(40HQ): 190 PCS (Approx)

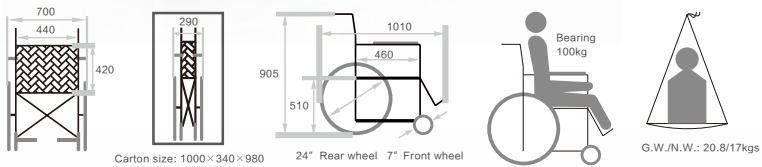


H005B

Frame: Steel
 Surface treatment: Electroplate surface
 Seat & back cushion cover: Leather cover
 Specifications: Fixed armrest, Fixed legrest, Fixed backrest, Commode
 Tyre: 8" front wheel,24"rear wheel
 Container QTY(20GP): 90 PCS (Approx)
 Container QTY(40HQ): 245 PCS (Approx)

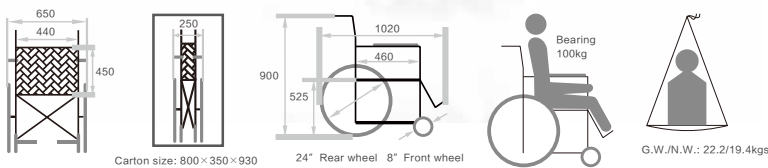


H008B

Frame: Steel
 Surface treatment: Electroplate surface
 Seat & back cushion cover: Leather cover
 Specifications: Detachable armrest, Swing away legrest, Elevating Legrests, 0~180° adjustable backrest, Anti-tip Specifications, Commode
 Tyre: 8" front wheel,24"rear wheel
 Container QTY(20GP): 55 PCS (Approx)
 Container QTY(40HQ): 155 PCS (Approx)

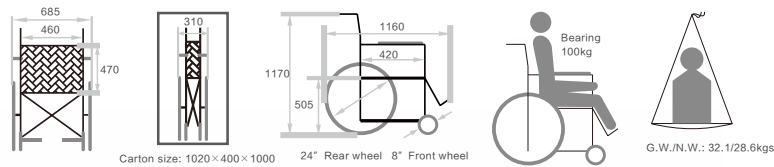

H009B

Frame: Steel
 Surface treatment: Electroplate surface
 Seat & back cushion cover: Leather cover
 Specifications: Fixed armrest, Swing away legrest, Elevating Legrests, Degree adjustable backrest(90~135°), Dnti-tip Specifications, Commode
 Tyre: 8" front wheel, 24"rear wheel
 Container QTY(20GP): 75 PCS (Approx)
 Container QTY(40HQ): 200 PCS (Approx)

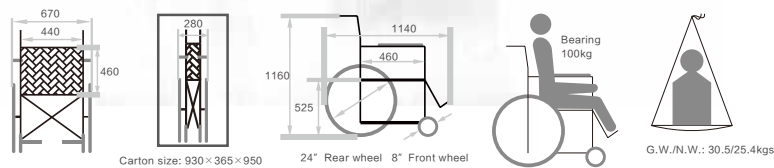


Economical Wheelchair




H007

Frame: Steel
Surface treatment: Spraying Plastics surface
Seat & back cushion Cover: Canvas cover
Specifications: Fixed armrest, Fixed legrest, Fixed backrest
Tyre: 7" front wheel, 24" rear wheel
Container QTY(20GP): 115 PCS (Approx)
Container QTY(40HQ): 310 PCS (Approx)

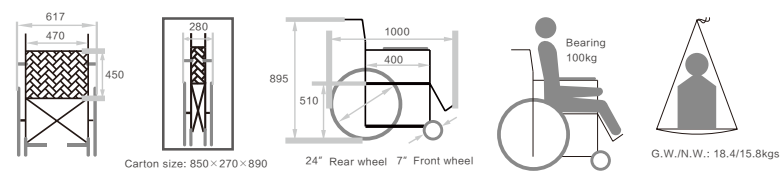


H005

Frame: Steel
Surface treatment: Electroplate surface
Seat & back cushion cover: Canvas cover
Specifications: Fixed armrest, Fixed legrest, Fixed backrest
Tyre: 8" front wheel, 24" rear wheel
Container QTY(20GP): 110 PCS (Approx)
Container QTY(40HQ): 290 PCS (Approx)

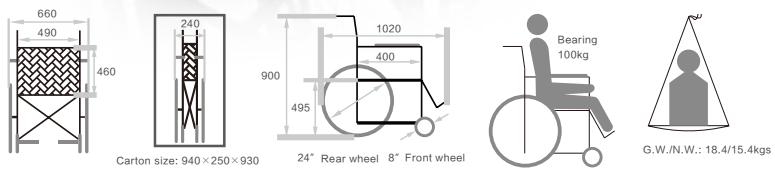


H004

Frame: Steel
Surface treatment: Spraying Plastics surface
Seat & back cushion cover: Canvas cover
Specifications: Fixed armrest, Fixed legrest, Fixed backrest, Canvas cover, Hard seat
Container QTY(20GP): 100 PCS (Approx)
Container QTY(40HQ): 270 PCS (Approx)

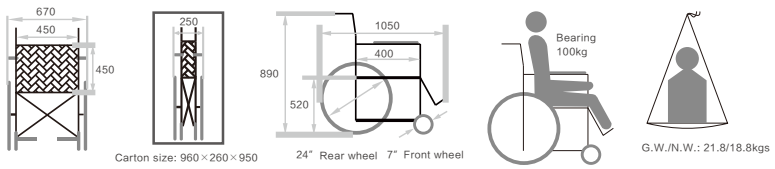

H010


Frame: Steel
Surface treatment: Spraying Plastics surface
Seat & back cushion cover: Canvas cover
Specifications: Reversible armrest, Swing away legrest, Fixed backrest
Tyre: 8" front wheel, 24" rear wheel
Container QTY(20GP): 125 PCS (Approx)
Container QTY(40HQ): 335 PCS (Approx)

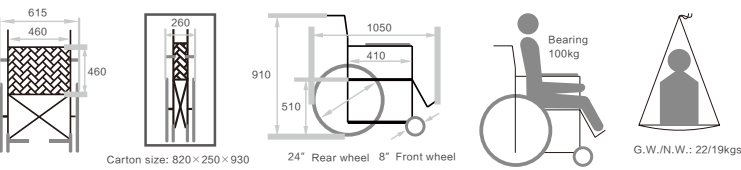




H062C

Frame: Aluminium
 Surface treatment: Spraying Plastics surface
 Seat & back cushion cover: Oxford+sandwich mesh
 Specifications: Fixed armrest, Fixed legrest, Foldable backrest, Auxiliary brake
 Tyre: 6"front wheel,22"rear wheel
 Container QTY(20GP): 100 PCS (Approx)
 Container QTY(40HQ): 270 PCS (Approx)

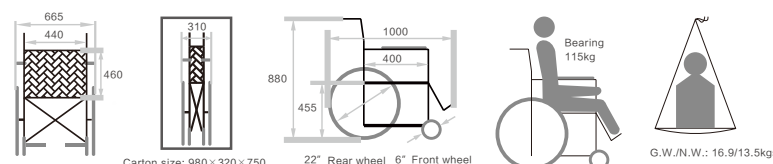

H053C

Frame: Aluminium
 Surface treatment: Oxidized surface
 Seat & back cushion cover: Oxford+sandwich mesh
 Specifications: Fixed armrest, Fixed legrest, Fixed backrest, Auxiliary brake
 Tyre: 6"front wheel,20"rear wheel
 Container QTY(20GP): 150 PCS (Approx)
 Container QTY(40HQ): 400 PCS (Approx)

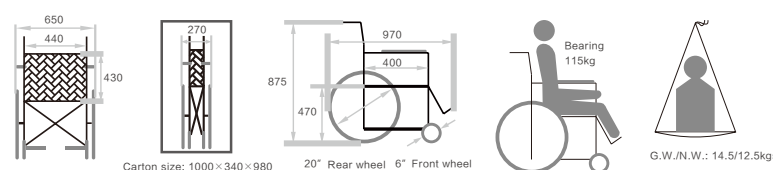


Transport Chair




1100

Frame: Aluminium
 Surface treatment: Oxidized surface
 Seat & back cushion Cover: Canvas cover
 Specifications: Reversible armrest, Fixed legrest, Auxiliary brake, Weight 7kgs only
 Tyre: 4" front wheel,6"rear wheel
 Container QTY(20GP): 155 PCS (Approx)
 Container QTY(40HQ): 410 PCS (Approx)

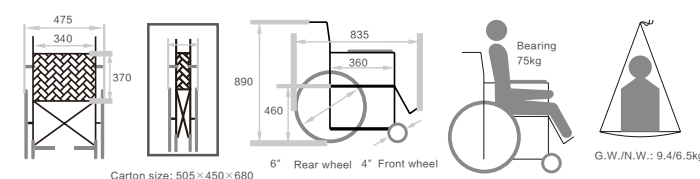

H032C

Frame: Aluminium
 Surface treatment: Oxidized surface
 Seat & back cushion Cover: Canvas cover
 Specifications: Fixed armrest, Fixed legrest, Foldable backrest, Auxiliary brake, Weight 11kgs only
 Tyre: 6" front wheel,14"rear wheel
 Container QTY(20GP): 150 PCS (Approx)
 Container QTY(40HQ): 400 PCS (Approx)

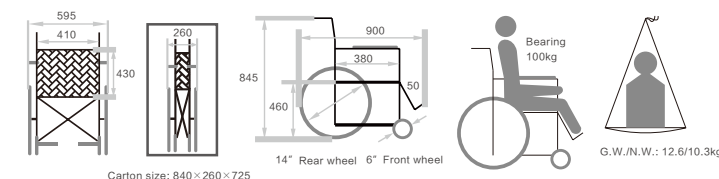




2001

Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion Cover: Canvas cover
 Specifications: Fixed armrest, Swing away legrest, Fixed backrest
 Tyre: 8" front wheel, 8" rear wheel
 Container QTY(20GP): 185 PCS (Approx)
 Container QTY(40HQ): 490 PCS (Approx)





2002

Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion Cover: Canvas cover
 Specifications: Fixed armrest, Swing away legrest, Fixed backrest
 Tyre: 8" front wheel, 8" rear wheel
 Container QTY(20GP): 185 PCS (Approx)
 Container QTY(40HQ): 490 PCS (Approx)

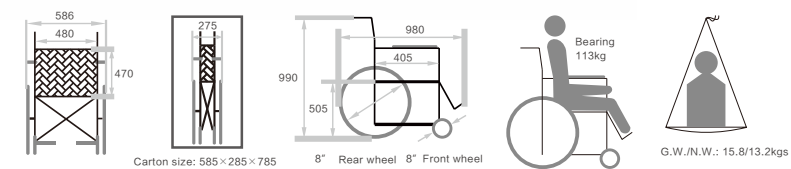

2002

Frame: Steel
 Surface treatment: Spraying Plastics surface
 Seat & back cushion Cover: Tannin cover
 Specifications: Detachable armrest, Swing away legrest, Fixed backrest, Auxiliary brake
 Tyre: 8" front wheel, 12" rear wheel
 Container QTY(20GP): 140 PCS (Approx)
 Container QTY(40HQ): 370 PCS (Approx)

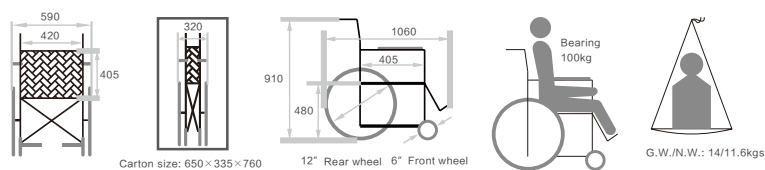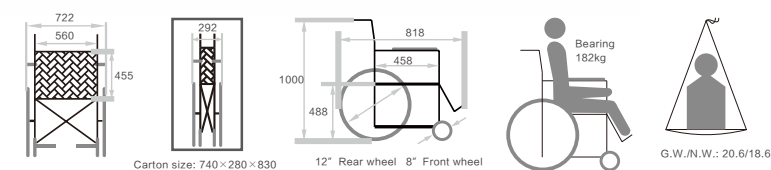

Mattresses with Mechanical Pump

M4 Series



○ Mattress coverlet with zipper



○ Adjustable hook




○ Replaceable pump filter foam



○ Adjustable air pump pressure

M5 Series



○ Mattress coverlet with zipper



○ Nylon + PU top cover (waterproof and moisture permeable)




○ Top cover with quilted cotton lining



○ Low pressure alarm



MATTRESSES WITH MECHANICAL PUMP				
Model	Product Image	Configuration	Selling Point	Parameter
M4-A	 QTN: 2PCS/CTN G.W./N.W: 14.2/12kgs Size: 46 × 46 × 38.5cm	Pump function configuration	Low-level machinery A Two alternation Static Fireproof enclosure Stepless pressure regulation Adjustable hook design Replaceable filter cotton design Power cord 1.5 meters	Air cushion size (L x W x H): 2000x900x100mm Air pump size (L x W x H): 290x140x155mm Voltage and frequency: AC220V~240V, 50Hz / AC110~120V,60Hz Fluctuation mode: double tube alternately fluctuates Alternate time: 12min(50HZ) / 10min(60HZ) Operating pressure: 40~100mmHg Outlet flow: ≥5L/min Maximum load: 135kg Air strip specification and quantity: 4 inch pipe diameter x22 Power cord length: 1.5 meters Noise: ≤35dBA
		Bed function configuration	Head static 4 inch Inflatable tube Nylon/PVC gray Upper cover-polyester red Base cushion Nylon/PVC dark gray Base cushion fixing strap All-around zipper	
M5-A	 QTN: 2PCS/CTN G.W./N.W: 18/15.2kgs Size: 53 × 49 × 40cm	Pump function configuration	Two alternation Static Fireproof enclosure Stepless pressure regulation Adjustable hook design Replaceable filter cotton design Power cord 4.5 meters Handle Low-pressure warning light	Air cushion size (L x W x H): 2000x900x125mm Air pump size (L x W x H): 300x140x190mm Voltage and frequency: AC220V~240V, 50Hz / AC110~120V,60Hz Fluctuation mode: double tube alternately fluctuates Alternate time: 12min(50HZ) / 10min(60HZ) Operating pressure: 30~80mmHg Outlet flow: ≥5L/min Maximum load: 135kg Air strip specification and quantity: 5 inch pipe diameter x18 Power cord length: 4.5 meters Noise: ≤30dBA
		Bed function configuration	Head static 5 inch Inflatable tube Nylon/PVC gray Upper cover-polyester + car cotton red Base cushion Nylon/PVC dark gray Base cushion fixing strap All-around zipper	
M5-B	 QTN: 2PCS/CTN G.W./N.W: 18/15.2kgs Size: 53 × 49 × 40cm	Pump function configuration	Two alternation Static Fireproof enclosure Stepless pressure regulation Adjustable hook design Replaceable filter cotton design Power cord 4.5 meters Handle Low-pressure warning light	Air cushion size (L x W x H): 2000x900x125mm Air pump size (L x W x H): 300x140x190mm Voltage and frequency: AC220V~240V, 50Hz / AC110~120V,60Hz Fluctuation mode: double tube alternately fluctuates Alternate time: 12min(50HZ) / 10min(60HZ) Operating pressure: 30~80mmHg Outlet flow: ≥5L/min Maximum load: 135kg Air strip specification and quantity: 5 inch pipe diameter x18 Power cord length: 4.5 meters Noise: ≤30dBA
		Bed function configuration	Head static Micro-jet 5 inch Inflatable tube Nylon/PVC gray Upper cover-polyester + car cotton red Base cushion Nylon/PVC dark gray Base cushion fixing strap All-around zipper	
M5-C	 QTN: 2PCS/CTN G.W./N.W: 18/15.2kgs Size: 53 × 49 × 40cm	Pump function configuration	Two alternation Static Fireproof enclosure Stepless pressure regulation Adjustable hook design Replaceable filter cotton design Power cord 4.5 meters Handle Low-pressure warning light	Air cushion size (L x W x H): 2000x900x125mm Air pump size (L x W x H): 300x140x190mm Voltage and frequency: AC220V~240V, 50Hz / AC110~120V,60Hz Fluctuation mode: double tube alternately fluctuates Alternate time: 12min(50HZ) / 10min(60HZ) Operating pressure: 30~80mmHg Outlet flow: ≥5L/min Maximum load: 135kg Air strip specification and quantity: 5 inch pipe diameter x18 Power cord length: 4.5 meters Noise: ≤30dBA
		Bed function configuration	Head static CPR transport 5 inch Inflatable tube Nylon/PVC gray Upper cover-polyester + car cotton red Base cushion Nylon/PVC dark gray Base cushion fixing strap All-around zipper	

M8-A



○ **Static mode**
Convenient for patients to turn over and nursing.



○ **CPR quick release valve**
When cardiopulmonary resuscitation is needed, be sure to open CPR to quickly deflate the mattress.



○ **Braided band**
The shuttleless Loom makes braided band, which is more durable.



○ **Quick replacement**
It is convenient for users to quickly remove and replace the airbag.



○ **Alternate mode**
Alternately simulate natural sleep rhythm, promote blood circulation and avoid local ischemia caused by long-term compression of tissues.



○ **Head restraint function**
The patient's head is located in the non fluctuating front four tube headrest airbag, which makes the patient sleep more comfortably.



○ **Mattress micro jet**
Reduce the incidence of pressure ulcer, avoid the accumulation of moisture and heat in the bed, and achieve the effect of dryness and comfort.




○ **Two way zipper**
It can be assembled and disassemble at will, which is very convenient for cleaning when mixed disinfection is carried out in medical institutions.



○ **Nylon Pu Bedsread**
Feel comfortable and silky. Easy to clean and avoid dirt sticking.



- Adjustable weight
- Low noise
- Dual mode
- Alarm Mute Button

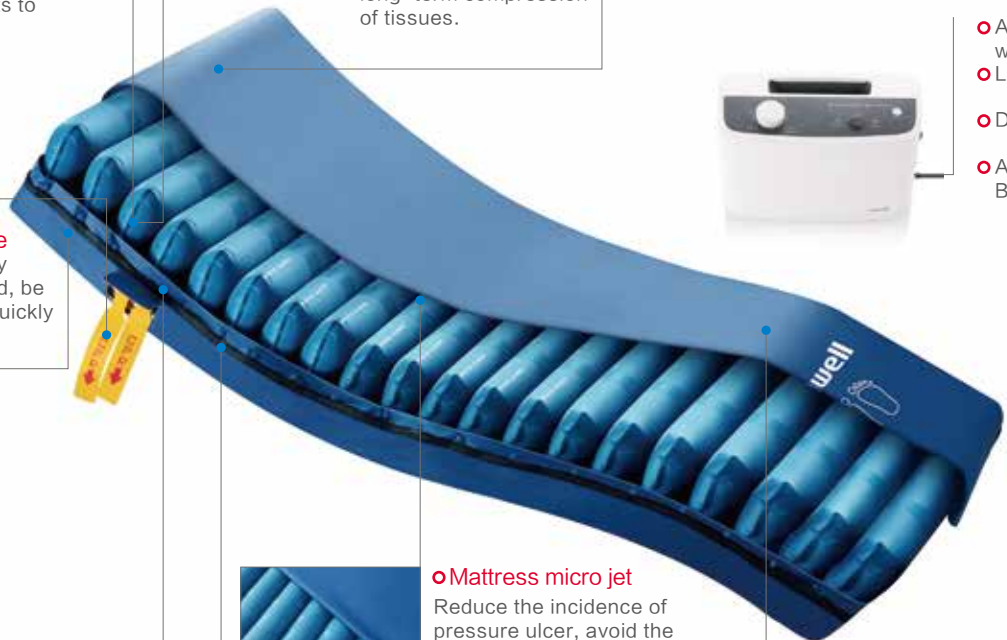

Anti-decubitus Mattress

Strip style



Specifications: Material: PVC
Working mode: 22tubes, alternating deflating
Input power: 6.5VA
Output pressure: ≥14kPa
Flowrate: ≥5L/min
QTN: 2PCS/CTN
G.W./N.W: 13.3/10.7kgs
Size: 49.5 × 37 × 38.5cm

Air-jet style



Specifications: Material: PVC
Working mode: Tiny holes on surface for air injection
Input power: 12VA
Output pressure: ≥20kPa
Flowrate: ≥14L/min
QTN: 2PCS/CTN
G.W./N.W: 15/12.6kgs
Size: 48.5 × 35 × 45cm

Lattice style



Specifications: Material: PVC
Working mode: Alternating deflating
Input power: 6.5VA
Output pressure: ≥12kPa
Flowrate: ≥5L/min
QTN: 2PCS/CTN
G.W./N.W: 6.5/5.5kgs
Size: 34 × 30 × 21cm

MATTRESSES WITH MECHANICAL PUMP				
Model	Product Image	Configuration	Selling Point	Parameter
M8-A	 QTN: 1PC/CTN GW./NW.: 12.6kg/11.4kg Size: 46.5 × 37 × 43cm	Pump function configuration	Alternation mode Static mode Fireproof enclosure Stepless pressure regulation Replaceable air filter cotton 4.5 meters power cord Pump handle Low-pressure alarm Alarm Mute	Air cushion size(L x W x H): 2000x900x200mm Air pump size (L x W x H) 290x140x190mm Voltage and frequency: AC220V~240V,50Hz/AC110V~120V, 60Hz Fluctuation mode: double tube alternately fluctuates Alternate time: 12min(50Hz)/10min(60Hz) Operation pressure: 30~80mmHg Outlet flow: 8L/min Maximum load: 220kg Air strip specification and quantity: 8 inch pipe diameter × 20 Power cord length: 4.5meters Noise: ≤ 30dBA
		Bed function configuration	Static headrest Micro-jet airbag 8 inch mattress Inflatable tube Nylon/PVC blue Upper cover Nylon/PU blue Base cushion Nylon/PVC blue Base cushion fixing strap All-around zipper	

Anti-decubitus Seat



Round type

It is used to prevent pressure sores in patients after surgery or in bed for a long time, and relieve fatigue in buttocks and back, capacity: 100kgs
Air nozzle with locking device, good air tightness, Lightweight, soft, breathable, pressure dispersing, ergonomic design

QTN: 20PCS/CTN
G.W.: 6kgs
Size: 50 × 24 × 22.5cm



360° Ergonomics Design



Annular design



Light and ventilation



Dispersion pressure



Nine hole type

QTN: 20PCS/CTN
G.W.: 6.8kgs
Size: 43 × 27 × 34.5cm



Back support

QTN: 20PCS/CTN
G.W.: 9kgs
Size: 43 × 29.5 × 36.5cm

Tractor for neck ache

It is mainly suitable for the prevention of neck fracture, sliding vertebra, disc herniation, over-extension and over-flexion injury and other diseases

The operation is simple

Light weight, easy to carry

Adjustable strength, suitable for different customers

QTN: 12PCS/CTN

G.W.: 11.5kgs

Size: 62 × 41.5 × 42.5cm



Model A



Model B

QTN: 28PCS/CTN
G.W.: 14.5kgs
Size: 59 × 39 × 46cm



Model C

QTN: 28PCS/CTN
G.W.: 14.5kgs
Size: 59 × 39 × 46cm

Overbed Table



YU610

Overbed table, environment-protection top, waterproof, easy to lift and lower, Low noise, detachable.
Packing details:
G.W.: 10.3kgs, 1pc;
Size: 80 × 45.5 × 8.5cm



YU611

Waterproof and wear-resisting desktop, powder coated frame, four castor with brake, easy to lift and lower, low noise, detachable.
Packing details:
G.W.: 10.3kgs, 1pc;
Size: 81 × 50 × 8.5cm



YU650

Waterproof and wear-resisting desktop, four castor-movable, powder-coated frame, easy to lift and lower, no noise, detachable.
Packing details:
G.W.: 8 kgs, 1pc;
Size: 67 × 17 × 46cm



YU616

Overbed table, environment-protection top, waterproof, easy to lift and lower, low noise, detachable.
Packing details:
G.W.: 10.5kgs, 1pc;
Size: 82.5 × 42 × 12.5cm



YU612

Flame retardant, waterproof and wear-resisting desktop, electroplated frame, four castor with brake, easy to lift and lower, detachable.
Packing details:
G.W.: 11kgs, 1pc;
Size: 87 × 52 × 9.5cm

Walking Aid



YU710A

Adopt high strength aluminum alloy and ABS rubber parts, high-strength oxidation aluminum surface, folding, 6 levels in height adjustment and easy to carry.
Packing details:
G.W.: 11.9kgs, 4pcs;
Size: 58 × 36 × 81.5cm



YU710

High-strength oxidation aluminum surface, folding, 6 levels in height adjustment and easy to carry.
Packing details:
G.W.: 6.4kgs, 2pcs;
Size: 62 × 19 × 79cm



YU730

High-strength oxidation aluminum surface, can remove forward alternative to left or right, folding and easy to carry.
Packing details:
G.W.: 6.4kgs, 2pcs;
Size: 56 × 17 × 81cm



YU750

High-strength oxidation aluminum surface, can remove bywheel, folding and easy to carry.
Packing details:
G.W.: 6.9kgs, 2pcs;
Size: 69.5 × 20 × 80cm

Walking Stick&crutch



YU810



YU820



YU821



YU823



YU828



YU830



YU838



YU850



YU852



YU860

Crutch, high-strength aluminum alloy tube, adjustable (Medium, Large, Extra large)
Packing details:
G.W: 14.5kgs, Size: 109 x 30.5 x 31cm(Medium)
G.W: 16kgs, Size: 123 x 30.5 x 31cm (Large)
G.W: 13kgs, Size: 135 x 30.5 x 31cm(Extra large)



YU870

Multifunctional Crutch, high-strength aluminum alloys tube, oxidized surface, and a sturdy support cane when folded, a comfortable seat when open.
Packing details:
G.W: 9.3kgs, 10pcs
Size: 88 x 25.5 x 27cm(YU870)
G.W: 10.8kgs, 10pcs
Size: 85.5 x 34.5 x 41cm(YU871)



YU871



YU861

Crutch high-strength aluminum alloy tube, high adjustable, thick foam, non-slip mat
Packing details:
G.W.: 14.5kgs, 10PCS (5 Pairs)
Size: 65 x 31.5 x 92 cm

Data table of Walking Stick

Model	Aluminum alloy tube	Oxidized surface	Height adjustable range(mm)	Handle	Packing details	Weight capacity	Others
YU810	●	●	780~980	Foam	G.W.: 7.1kgs, 20pcs Size: 80 x 18 x 36cm	80kgs	
YU820	●	●	805~1005	PP	G.W.: 7.9kgs, 20pcs Size: 84 x 20 x 32cm	80kgs	
YU821	●	●	765~965	Wooden	G.W.: 8.6kgs, 20pcs Size: 66.5x41.5x16.5cm	80kgs	
YU823	●	●	965~1170	PP	G.W.: 5.7kgs, 10pcs Size: 81 x 43 x 21.5cm	80kgs	
YU828	●	●	795~995	TPR	G.W.: 11kgs, 20pcs Size: 75 x 41.5 x 18.5cm	80kgs	
YU830	●	●	820~920	Wooden	G.W.: 7.3kgs, 20pcs Size: 56.5 x 30 x 19cm	80kgs	Folded to 5 parts(280mm)
YU838	●	●	845~945	TPR	G.W.: 10kgs, 20pcs Size: 70 x 37 x 17.5cm	80kgs	Folded to 5 parts(280mm)
YU850	●	●	745~975	Foam	G.W.: 10.4kgs, 10pcs Size: 78 x 50 x 22.5cm	80kgs	
YU852	●	●	675~875	TPR	G.W.: 10kgs, 10pcs Size: 73.5 x 50 x 23cm	80kgs	

Commode chair

H027B
Reliable brand
Combine streamlining with ergonomics
Innovative assembly without welding, rivet or screws
PP frame to better loading capacity



PARAMETERS

Name	Description
Seat Depth	430mm
Seat Width	460mm
Seat Height	420mm
Specification	Detachable armrest, backrest and foot.
GW	6.2kg
NW	5.1kg
Main material	6061 Aluminium, plastic, rubber

All parameters measured in condition of normal use.



H023C
Four castor with brake, folding and easy to carry, powder coated frame, fixed armrest, 5 levels in height adjustment.
Packing details:
G.W.: 21kgs, 2pcs;
Size: 91 × 32 × 52cm



H032B
Electroplated or spraying frame, rear castor with brake detachable armrest, detachable footrest, soft seat moveable, folding and easy to carry.
Packing details:
G.W.: 14.5kgs, 1pcs;
Size: 57 × 34 × 52.5cm



H022A
Adopt HPCC steel plating, 5 levels in height adjustment, folding armrest, convenient and clean, safe and durable.
Packing details:
G.W.: 8kgs, 1pcs;
Size: 75.5 x 22.5 x 50.5cm



H020B

Grey paint, detachable, easy to carry , 7 levels in height adjustment.

Packing details:

G.W.: 26kgs, 4pcs;

Size: 65 × 65 × 65cm



H021B

Flip-up armrest, grey paint, detachable, easy to carry , 7 levels in height adjustment.

Packing details:

G.W.: 9.5kgs, 1pcs;

Size: 55 x 43 x 45.5cm



H022B

Folding, easy to carry electroplate surface.

Packing details:

G.W.: 14kgs, 2pcs;

Size: 76 × 32 × 50cm



H023B

Folding, easy to carry, plastic sprayed frame.

Packing details:

G.W.: 14kgs, 2pcs;

Size: 76 × 32 × 50cm