

Metal swing

Made of two galvanized metal pipes (pipe diameter 11.4 cm, thickness 2.5 mm). The upper parts of the pillars will be provided with plastic plugs, fixed with two aluminum rivets. It will be provided with two basket-type swing posts and a child-accompanying person, made of polyethylene, provided with chains and fixed to the pipes with fastening elements.


Overall dimensions: 322x310 cm

Maximum fall height: 40 cm

Installation requirements: To ensure safe and reliable operation, all support elements are to be sunk into the ground (earth) by 0.75 m to increase rigidity, followed by concreting (BC 300 concrete). The assembly of the elements must exclude the possibility of their disassembly without the use of special tools.

GALAEXPORT MÜHENDİSLİK
İNŞ. DİŞ TİC. SAN. LTD. ŞTİ.
Fevziçakmak Mh. Yayın Cd.No: 18
Karatay KONYA
Sulçuk Vergi Dairesi 388 181 3955



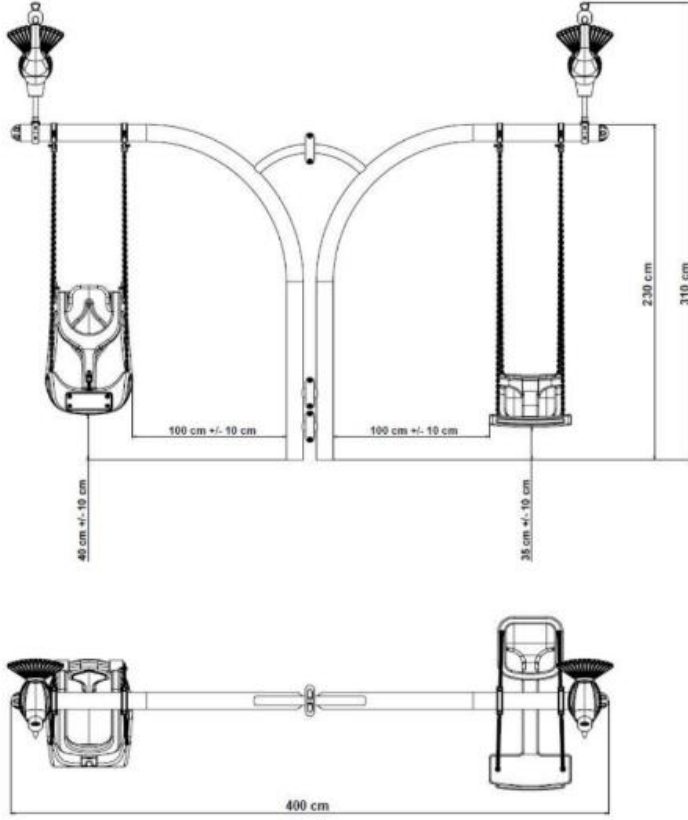

GALAEXPORT MÜHENDİSLİK
İNŞ. DİŞ. TİC. SAN. LTD. ŞTİ.
Fevziçakmak Mah. Kömür Cd.No: 18
Karatay KONYA
Selçuk Vergi Dairesi 388 181 3955