

STONE EXTRACTION BALLOONS

ONE BALLOON, THREE DIAMETERS

MICRO-TECH's vast product range includes high-quality 3-lumen extraction balloons for reliable removal of small stones and sludge from the bile duct. The conical, atraumatic tip of the catheter makes for easy, precise positioning using the two x-ray markers. The cylindrical balloon itself is made of high-quality latex and can be expanded to three different diameters. A specially calibrated single-use


syringe is supplied for each balloon diameter. Following insufflation, the balloon surface lies flat against the bile duct wall, enabling efficient and complete cleaning of the bile duct. A separate lumen for a 0.035 inch guidewire and one for contrast media, provide for ease of handling and contrast injection.

SPECIFIC CHARACTERISTICS

- 3-stage balloons
- One calibrated tip per diameter
- 3 lumens for insufflation, guidewire and contrast agent
- High X-ray visibility (radiopacity)



3-lumen stone extraction balloon from MICRO-TECH

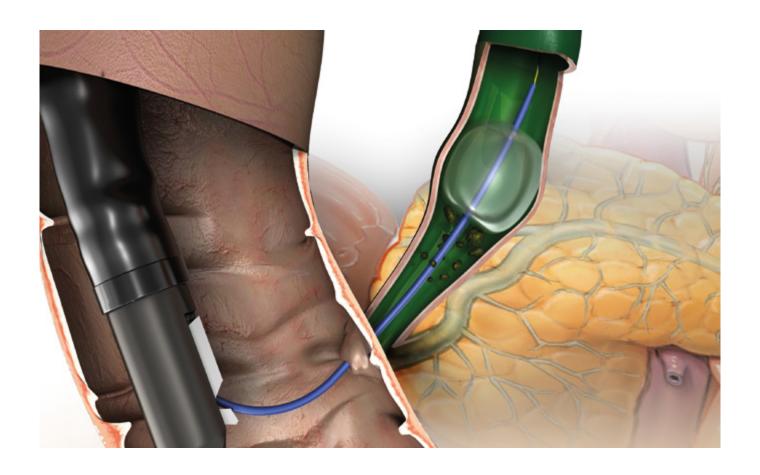

SPECIFICATIONS

REF	Ø inches	Total length mm	Tip length mm	Tip form	Set-up		Covering
CLASSIC GUIDE WIRE							
600382-5	0.035"	4200 130		straight	hydrophilic, radiopaque		extra stiff ≙ 0.035"
HYDRO-SLIDE GUIDE WIRE							
MTN-BM-63/45-A-S	0.025"	4500	60	straight	hydrophilic, radiopaque		extra stiff ≙ 0.035"
MTN-BM-63/45-A-J-S	0.025"	4500	60	J-form	hydrophilic, radiopaque		extra stiff ≙ 0.035"
REF		Injection		Lumen	Catheter Ø Fr.	Balloon Ø mm	Working length mm
STONE EXTRACTION BALLOONS							
SRB-T-9/12/15-20		Above (distal to the balloon)		3	7	9 / 12 / 15	2000
SRB-T-12/15/18-20	Above (distal to the balloon)		3	7	12 / 15 / 18	2000	
SRB-T-15/18/21-20	Above (distal to the balloon)		3	7	15 / 18 / 21	2000	
SRB-T-9/12/15-20-B	Below (proximal to the balloon)		3	7	9 / 12 / 15	2000	
SRB-T-12/15/18-20-B	RB-T-12/15/18-20-B Below (proximal to the balloon)		3	7	12 / 15 / 18	2000	
SRB-T-15/18/21-20-B		Below (proximal t	to the balloon)	3	7	15 / 18 / 21	2000
Recommended guidewires: MTN-BM 89/45-A (0.035 straight) and 600358-5 (0.035 straight)							

Recommended guidewires: MTN-BM 89/45-A (0.035 straight) and 600358-5 (0.035 straight) Packaging unit: 1 piece