



TOUCH II

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT. Videos on display (ads, instructions, etc.) 37 languages. 8 dosing signals as standard. 8 dosing signals as standard



G FACTOR

High G-Factor:
G-FACTOR 200 for low spin washers



EFFICIENCY

Intelligent consumption
Optimal loading
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Wet cleaning features



CONNECTIVITY

IoT - Domus Connect standard.
Remote technical service
Management of laundries: OPL
Remote payment



ERGONOMICS

Biggest door diameters: Ø460
Easy opening/closing system for door lock



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Equivalent parts for all models: contactors, electronic devices,...
Technical menu: telemetry, error diagnosis.



OTHERS

Hard mounted washers.
Anchoring to floor with anchoring base.
Panels in skinplate.
Drum and tub in stainless steel AISI 304
3 water inlets.
CB and WRAS approved product Option ETL




OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door.

TECHNICAL DATA	UNIT.	DLS - 18 TOUCH II				DLS - 22 TOUCH II			
DRUM									
Load capacity 1:9 / 1:10	Kg	20/18				25/22			
Volume	l	180				220			
Diameter	mm	700				700			
Depth	mm	470				570			
GENERAL DETAILS									
Washing speed / Spining speed	r.p.m.	50/714				50/714			
G Factor	-	200				200			
Maximum force transmitted	KN	2,63 ±5				3,04 ±5			
Frequency-dynamic force	Hz	8,42				8,42			
Noise level	dB	< 70				< 70			
Coin laundry version	-	Yes				Yes			
Double drain	-	Opt.				Opt.			
Weighing System / Tilting System	-	No / No				No / No			
SLUICE option	-	Yes				Yes			
DOOR									
Height center door / Height door	mm	655 / 348				655 / 348			
Diameter	mm	460				460			
POWER									
Motor	kW	2,2				2,2			
Electric heating power	kW	12				12			
Total electric power (electric model)	kW	12,75				12,75			
Total electric power (hw, steam model)	kW	2,2				2,2			
CONNECTIONS		ELECTRIC		STEAM - HOT WATER		ELECTRIC		STEAM - HOT WATER	
Tension 230V - I + N + T	Nº x mm2 / A	2x16+T - 63A		2x4+T - 32A		2x16+T - 63A		2x4+T - 32A	
Tension 230V - III + T	Nº x mm2 / A	3X6+T - 40A		-		3X6+T - 40A		-	
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T - 32A		-		4x4+T - 32A		-	
Steam inlet (Steam model) inch	inch	1/2"				1/2"			
Maximum steam consumption (Steam model)	Kg/h	12				12			
Water inlet inch	inch	3/4"				3/4"			
Water main pressure	Kgs/cm2	2-4				2-4			
Maximum water consumption*	Lit/h	120*				120*			
Drain inch	inch	3"				3"			
Drainage capacity	Lit/min	200				200			
DIMENSIONS / PACKING DIMENSIONS									
Net Width / Gross Width	mm	788 / 880				788 / 880			
Net Depth / Gross Depth	mm	840 / 1.040				950/1140			
Net Height / Gross Height	mm	1.307 / 1.500				1.307 / 1.500			
Net weight / Gross weight	kg	281 / 301				300/320			
Volume	m3	1,3				1,5			

* Program nº20, 75% load

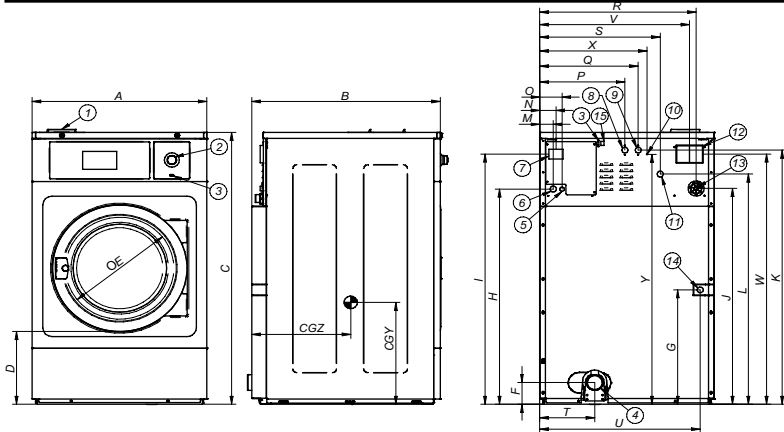

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT /WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGZ	CGY
DLS-18	mm	788	850	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	546
DLS-22	mm	788	950	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	586