

**THE NETHERLANDS**
(N E D E R L A N D)**COMMUNICATION**Concerning ⁽¹⁾ :

- ~~- approval granted~~
- approval extended
- ~~- approval refused~~
- ~~- approval withdrawn~~
- ~~- production definitely discontinued~~

of a type of tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4-30R-0287157**Extension number: 01**

- | | |
|--|--|
| 1. Manufacturer's name and address | : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany |
| 2. Tyre type designation ⁽²⁾ | |
| 2.1 Brand-name(s)/trademark(s) | : GISLAVED
<u>CONTINENTAL</u> |
| 2.2 Trade description(s)/Commercial name(s) | : GISLAVED, SOFT*FROST 200
<u>CONTINENTAL, VikingContact 7</u> |
| 3. If applicable, name and address of the manufacturer's representative | : not applicable |
| 4. Summarized description | |
| 4.1 Tyre size designation | : 215/55 R 16 |
| 4.2 Category of use | : normal /snow / special use / temporary use ⁽¹⁾ |
| 4.3 Structure | : diagonal /bias belted/ radial/ run-flat tyre ⁽¹⁾ |
| 4.4 Speed category symbol | : T |
| 4.5 Load-capacity index | : 97 |
| 5. Technical Service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity | : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany |
| 6. Date of report issued by that service | : 14.01.2016, 15.01.2016 |
| 7. Number of report issued by that service | : 4671143, 4671142 |
| 8. Reason(s) of extension (if applicable) | : Tyre Type Designation added |
| 9. Any remarks | : Reinforced/Extra Load |



Approval number: E4-30R-0287157

Extension number: 01

10. Place : Zoetermeer
11. Date : 13-DEC-2017
12. Signature :

T. Ploshchansky




13. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.

- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.


-
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
 - The test report as mentioned in item 7.

(1) Strike out what does not apply.

(2) A list of Brand name(s)/trademark(s) or Trade description(s)/ Commercial name(s) may be annexed to this communication



The drawing may contain more position numbers than required by UNECE type approval.

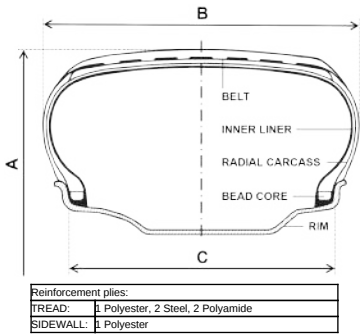


Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content	Design Dimensions (calculated /Annex-5)		
1/194	Brand Name (Trade mark)		both	GISLAVED	116	"Inside"/"Outside" marking		SS	OUTSIDE	Overall diameter	A (mm)	642
2 or 3	Trade description (Commercial name)		both	SOFT*FROST 200	117	"Inside"/"Outside" marking		OSS	INSIDE	Section Width	B (mm)	226
4	Tire size designation	>6 (or 9	both	215/55 R 16	134	Date of manufacturing	>4 mm	SS	[WWYY]	Measuring rim	C (Rim Code)	7.0Jx16
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#	Approval No. E4-30R-0287157 Extension: 01 Name: D. Schoenfelder Drawing No.: 1 Date: 12/6/17 4:33 PM Pattern 3119.02 		
7 or 8	Service description (LI / SSY)	>6 mm	both	97 T	184	Runflat Symbol		both	-			
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-			
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S	135	UN approval mark	>12 mm	both	E4			
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	0287157			
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD								
19	PSI index	>2 mm	both	-	If Pos 78 is used	Tread depth			-			
27	Regroovability		both	-		Surface void/ fill ratio			-			
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-	If Pos 79 is used	Number of circumferential ribs			-			
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-		Number of block-like elements			-			
78	Mark for special use tires	>4 mm	both	-		Depth of lateral grooves/sipes >=50%of main groove depth?			-			
79	"TRACTION"	>4mm	both	-								







The drawing may contain more position numbers than required by UNECE type approval.

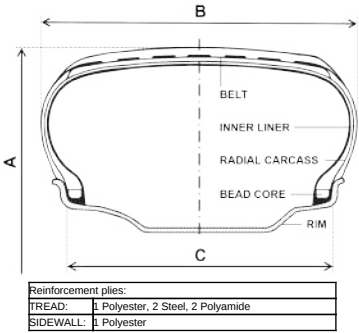


Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content	Design Dimensions (calculated /Annex-5)			
1/194	Brand Name (Trade mark)		both	CONTINENTAL	116	"Inside"/"Outside" marking		SS	OUTSIDE	Overall diameter	A (mm)	642	
2 or 3	Trade description (Commercial name)		both	VikingContact 7	117	"Inside"/"Outside" marking		OSS	INSIDE	Section Width	B (mm)	226	
4	Tire size designation	>6 (or 9	both	215/55 R 16	134	Date of manufacturing	>4 mm	SS	[WWYY]	Measuring rim	C (Rim Code)	7.0Jx16	
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#	Approval No. E4-30R-0287157 Extension: 01 Name: D. Schoenfelder Drawing No.: 2 Date: 12/6/17 4:33 PM Pattern 4226.01			
7 or 8	Service description (LI / SSY)	>6 mm	both	97 T	184	Runflat Symbol		both	-				
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-				
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S	135	UN approval mark	>12 mm	both	E4				
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	0287157				
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD	If Pos 78 is used				Tread depth		-		
19	PSI index	>2 mm	both	-					Surface void/ fill ratio		-		
27	Regroovability		both	-	If Pos 79 is used				Number of circumferential ribs		-		
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-					Number of block-like elements		-		
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-					Depth of lateral grooves/sipes >=50%of main groove depth?		-		
78	Mark for special use tires	>4 mm	both	-									
79	"TRACTION"	>4mm	both	-									

Continental



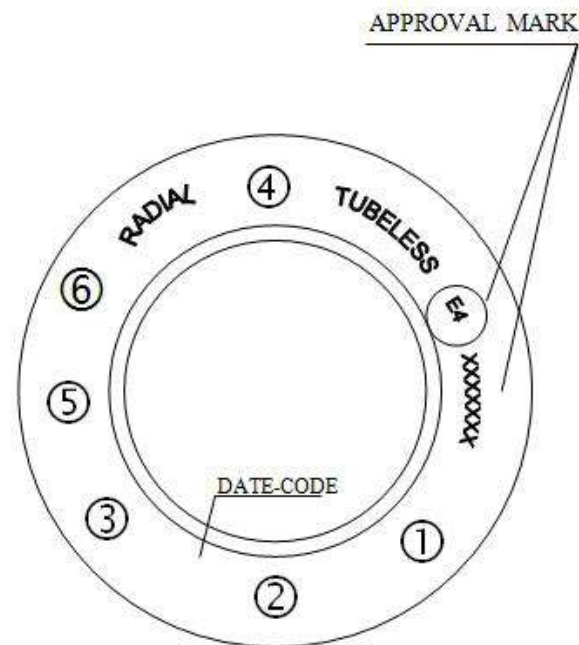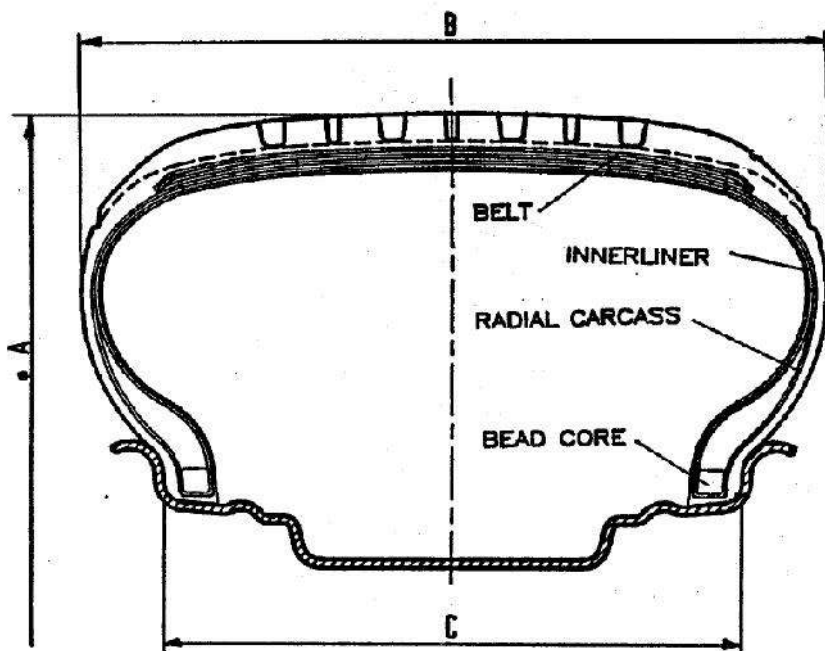

1st Sidewall

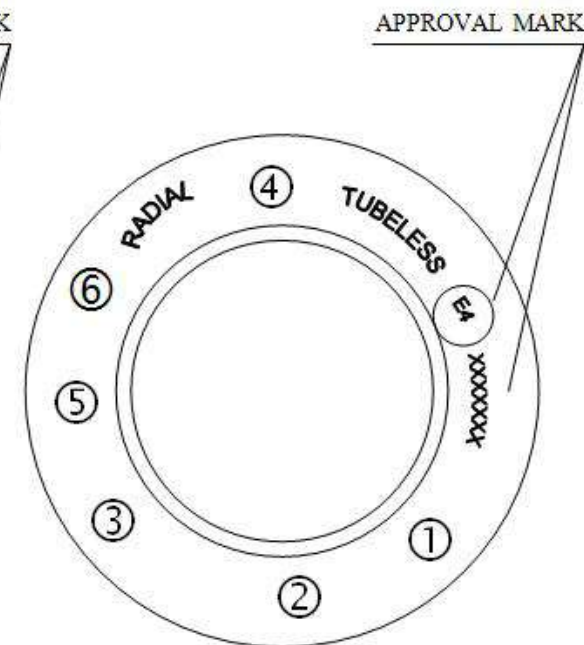

2nd Sidewall

3119.02



6 T	3 215/55 R 16 Reinforced/Extra Load	5 97	TT TL	642	226	7.0Jx16	
SS	Category of use marking (if applicable) M+S	LI	Tyre Type	A mm	B mm	C Rim Code	Remarks
Brand name	1 GISLAVED			Drawing No. / Remarks :		Checked / Date :	
Tyre type Designation	2 SOFT*FROST 200			P - 0287157		20.07.2015 J. Recknagel	

