

BMC 417

LIGHT TRUCK



CABIN

TYPE

Low Roof - Without Bed

CAB SUSPENSION

Mechanical

AXLE CONFIGURATION

4X2

ENGINE

BRAND / MODEL

Cummins B4.0EVI E170

TYPE

Turbo Intercooler Diesel

NUMBER OF CYLINDERS

4

DISPLACEMENT

3.956 L

MAX. POWER

168 PS (125 kW) @ 2400 rpm

TORQUE

600 Nm @ 1100-1800 rpm

TANKS

FUEL TANK CAPACITY (3365 WB)

130 L

FUEL TANK CAPACITY (3845 WB)

200 L

ADBLUE TANK CAPACITY

18 L

GEAR BOX

BRAND / MODEL

Eaton ESO-6106 (Manual)

NUMBER OF GEARS

6 Forward, 1 Reverse

GEAR RATIO

6,195:1 ; 0,775:1 (Reverse: 5,69:1)

CLUTCH

362 mm [Single Disc]

AXELS

FRONT AXLE

Load Capacity

3200 kg

REAR AXLE

Number of Differential Speeds

Single Speed

Gear Ratio

3.889:1

Load Capacity

6400 kg

SUSPENSION

FRONT AXLE

Leaf Spring, Telescopic Shock Absorbers

REAR AXLE

Leaf Spring, Telescopic Shock Absorbers

ANTI-ROLL BAR

Front and Rear Axle

TYRES

SIZE / NUMBER

215 / 75 R 17.5, 6+1

RIMS

SIZE

6.0 J x 17.5

PERFORMANCE

TOP SPEED (LIMITED) (KM/H)

90

TURNING RADIUS (M)

3365 WB ; 6.7 - 3845 WB ; 7.3

ELECTRICAL SYSTEM

BATTERIES

2 x 12 V / 92 Ah

ALTERNATOR

28 V, 90 A

STARTER

24 V, 3,6 kW

STEERING SYSTEM

TYPE

Hydraulic

BRAKE SYSTEM

BRAKE SYSTEM TYPE

Air brake, Disc brake, ABS, ESC, HSA, ASR, AEBS, LDWS

CHASSIS

CHASSIS PROFILE

"C" Section

STANDARD ACCESSORIES

Digital Air Conditioner (Multimedia Control)

Bluetooth, Radio/MP3 Player

MP5 Multimedia

Advanced Emergency Braking System (AEBS)

Lane Departure Warning System (LDWS)

Hill Start Assist (HSA)

Electronic Stability Control (ESC)

Cruise Control

Digital and Analog Cluster

Central Locking System (Remote Control)

Tire Pressure Monitoring System (TPMS)

Power Steering

Steering Wheel Control Buttons

Automatic Headlights

Daytime Running Lamps (LED)

Side Marker Lights

Fog Lights

Adjustable Headlights

Rear View Camera

Rear Parking Sensor

Heated Exterior Mirrors

Electrically Controlled Windows

Fabric Seats

1 (Driver) + 2 (Passenger) Seat Configuration

Adjustable Driver's Seat

Hand-Lever Controlled Engine Brake

Safety Belt (3 Pcs)

Side Door Document's Area

Car Lighter, Ashtray

USB Charger

Sun Visor

Glove Box

Upper Shelves Inside the Cabin

Cup Holder


Tow Hook (Rear & Front)

Lockable Fuel Tank Cap

Lockable AdBlue Tank Cap

PTO Preparation

Spare Tyre

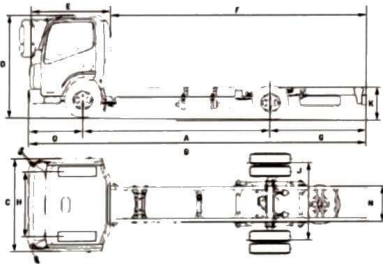

DIMENSIONS (mm)

A: Wheelbase	3365	3845
B: Overall Length	6155	7055
C: Overall Width (Excluding Mirrors)	1995	1995
D: Overall Height	2390	2390
E: Cabin Length	1682	1682
F: Useful Chassis Length	4473	5373
G: Rear Overhang	1590	2070
H: Front Track	1710	1710
J: Rear Track	1800	1800
K: Chassis Height	865	850
N: Chassis Width	850	850
O: Front Overhang	1110	1110

WEIGHTS (KG)

	LEGAL	TECHNICAL
MAX. WEIGHT LOADED FRONT AXLE	2935	3200
MAX. WEIGHT LOADED REAR AXLE	6065	6400
GROSS VEHICLE WEIGHT	9000	9600

CURB WEIGHT (KG)

WHEELBASE	3365	3845
CURB WEIGHT	3025	3130
PAYLOAD	5975	5870

BMC reserves the right to change the technical specifications of the products without prior notice. (February 2024)

BMC OTOMOTİV SANAYİ VE TİCARET A.Ş.

Factory, Production and Marketing Kemalpaşa Caddesi No:288 Pınarbaşı 35060 Bornova / İZMİR TÜRKİYE

444 9 262

www.bmc.com.tr