






NARROW BELTS 24" COATED ABRASIVES CONTINUED

ABRASIVE GRAINS

	Ceramic Alumina (PCER)
	Ceramic Alumina (CER)
	Zirconia Alumina (Z/A)
	Aluminum Oxide (A/O)

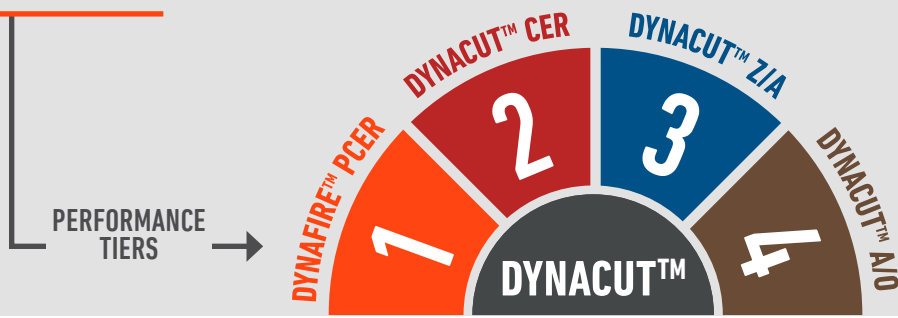

Length	Width	Grit	Item #	Item #	Item #	Item #	Qty
24" (610 MM)	1" (25 mm)	40	79150	•	79064	91153	50
		60	79151	•	79065	•	50
		80	79152	•	79066	•	50
		120	79194	•	79067	•	50
		180				90486	50
		220				90487	50
	1-1/2" (38 mm)	60	•	•	•	91632	10
		80	•	•	•	91633	10
		120	•	•	•	91634	10
		180				91635	10
		220				91628	10
		320				91629	10
	3" (76 mm)	36	•	•	79043	•	10
		40	•	•	79050	•	10
		60	•	•	79051	•	10
		80	•	•	79052	•	10
		120	•	•	79053	•	10

• Call for availability and pricing.

TOOL POST GRINDER



TAKE-ABOUT SANDER ABRASIVE BELT TOOL



CONTACT ARM PLATEN PADS BELT SUPPORT FOR ABRASIVE BELT TOOLS

FOR WORK ON CONTOURED PIECES



FOR HEAVY DEBURRING & POLISHING



FOR USE WITH CONTACT ARMS WITH SMALL DIAMETER CONTACT WHEELS



Material	Width	Length	Thickness	Item #	Qty
Soft	1/4"	7"	1/8"	11032	5
	1/2"	7"		11025	5
	3/4"	7"		11119	5
	1"	2"		15323	5
Hard	1/4"	7"	1/8"	11033	5
	1/2"	7"		11026	5
	3/4"	7"		11109	5
	1"	2"		15324	5
Thin	1/4"	7"	1/32"	11034	5
	1/2"	7"		11027	5
	3/4"	7"		11129	5

Softer, wider platen pads allow belts to conform to a work surface; hard, thin platens provide greater unit pressure for consistent mineral breakdown in aggressive applications.

11025 Platen Pad affixed to 11218 Dynafite® Contact Arm

