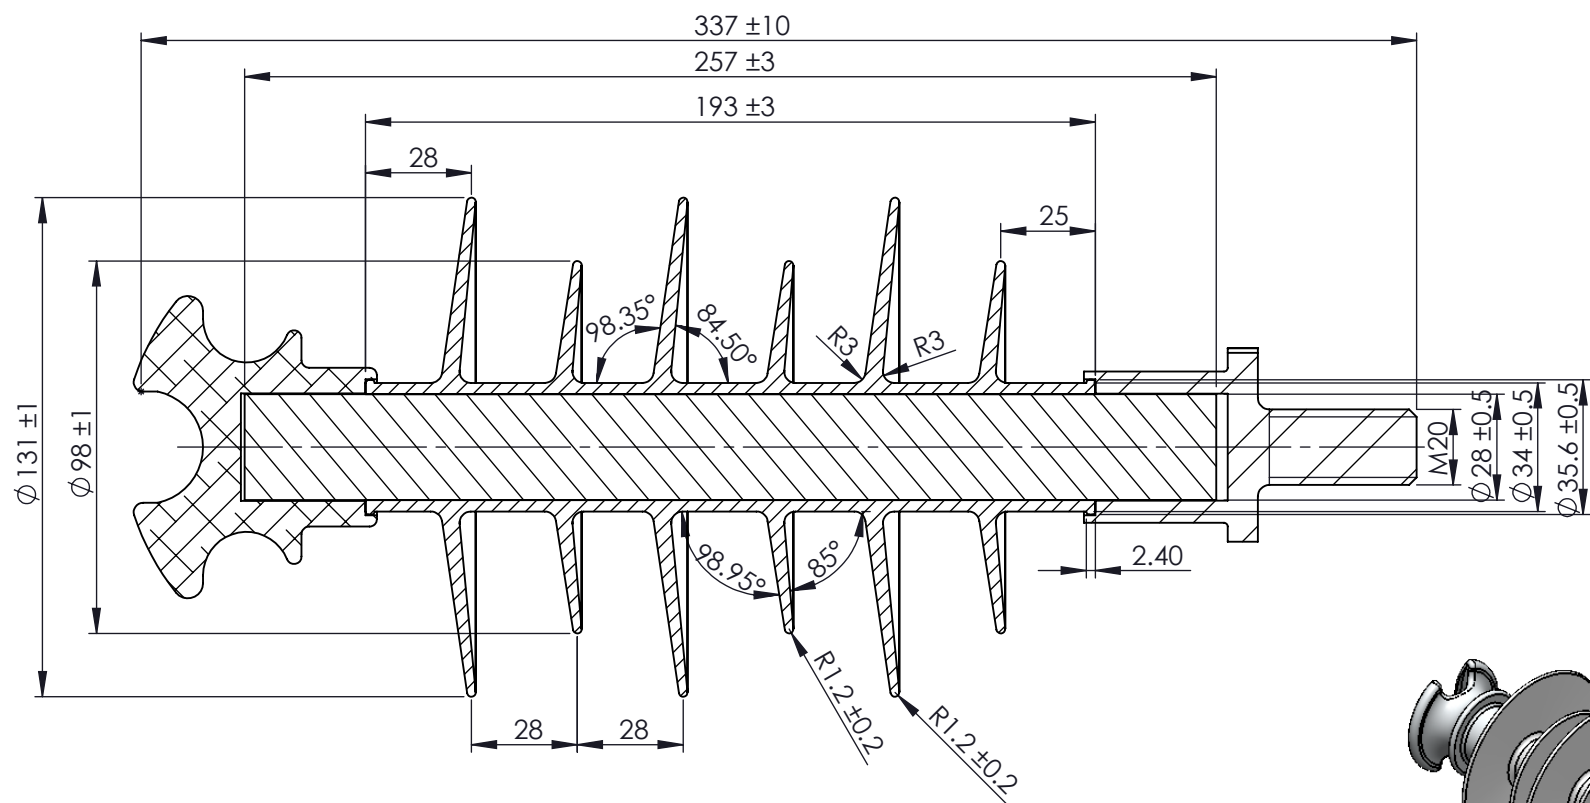


LD=645mm
Arc distance=240mm

Trade Mark:  oltage®

Specified Tensile Load =13 kN
Minimum Specified Cantilever Load =5 kN
Minimum Dry power frequency withstand voltage =70 kV
Minimum Wet power frequency withstand voltage = 50 kV
Minimum Lightning impulse withstand voltage = 125 kV
Type of the fittings: Top Fitting & Wrenchable Pin

Scale: 1/3

Afra Modern Systems

Part or Asmbly Name:DP-280645

Tol:0= ± 0.1
0.0= ± 0.05
0.00= ± 0.02

Dwg No:01-01-31-01

Size: A4

Unit: mm

Pag No: 1 of 3

Rev: 01

PED Code: 773852

Date: 95.07.08

Design By: Omid

Date: 95.07.08



Drawn By: Omid

Date: 95.07.08


Checked By:Omid

Date:

Approved By: Firoozsani

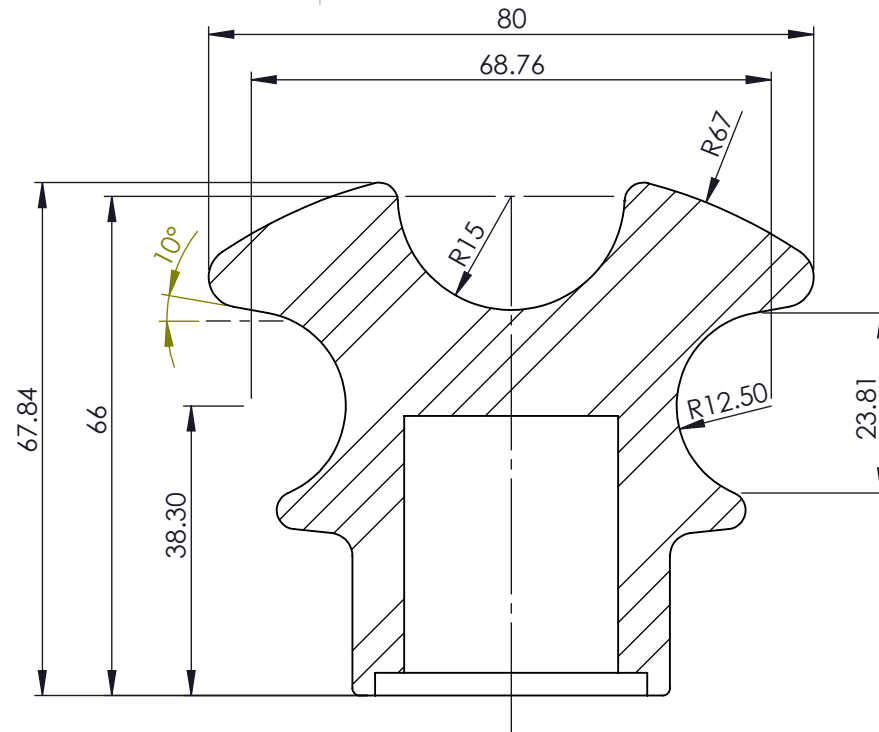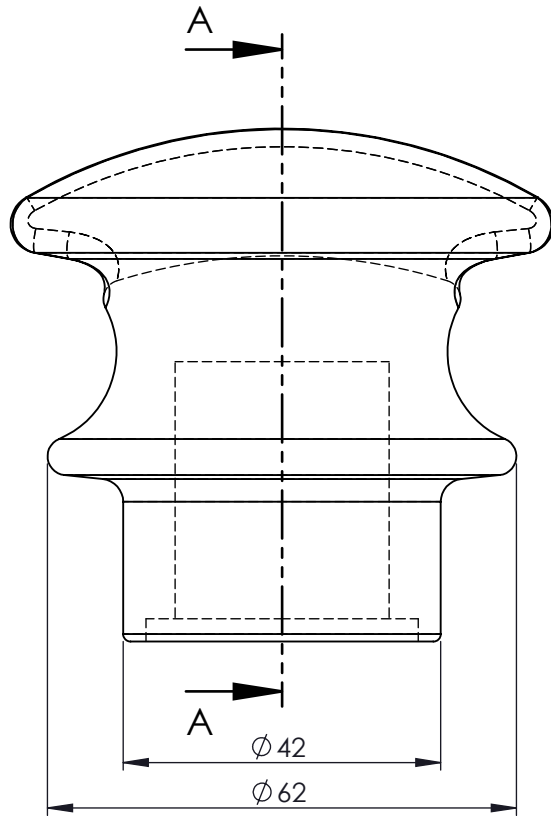


SECTION A-A
SCALE 1 : 1




Trade Mark:  oltage®


Scale: 1/1	Afra Modern Systems	Part or Asmbly Name:Top fitting rod 28	
Tol:0 $\pm$ 0.1 0.0 $\pm$ 0.05 0.00 $\pm$ 0.02	Dwg No:01-02-02-05-12		Date:96.08.30 Design By: Omidi
	Size: A4	Unit: mm	Date:96.08.30 Drawn By: Omidi
	Pag No:2 of 3	Rev: 03	Date:96.08.30 Checked By:Omidi
	PED Code: 773852		Date: Approved By: Firoozsani

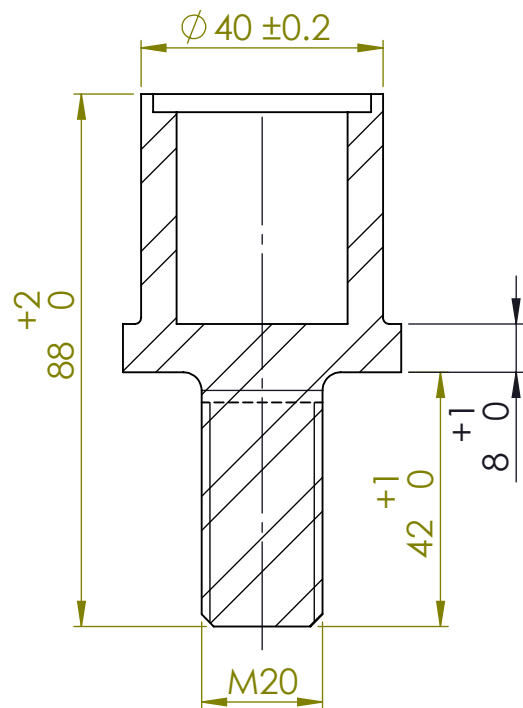

SECTION E-E
SCALE 4 : 5

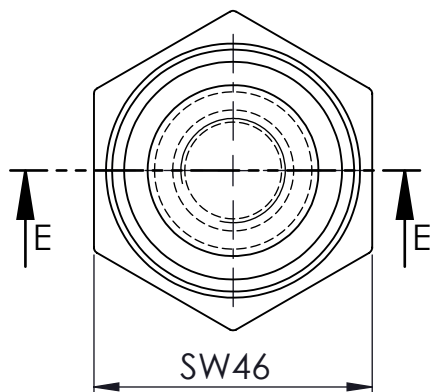

Note:
1-All sizes are measured after galvanising.

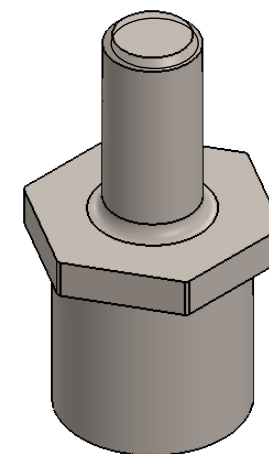

Trade Mark:  oltage®

Scale: 4/5	Afra Modern Systems	Part or Asmby Name: Fitting 28	
		Date: 94.11.26	Design By: Omidi
Tol: 0 ± 0.1 0.0 ± 0.05 0.00 ± 0.02	Dwg No: 01-02-02-21		Date: 94.11.26
	Size: A4	Unit: mm	Design By: Omidi
	Pag No: 3 of 3	Rev: 01	Date: 94.11.26
	PED Code: 773852		Checked By: Omidi
		Date:	Approved By: Firoozsani