



E9\*54R00/23\*6066\*00

Página / Page 1 / 2

Relativa a / concerning: (1)

- concesión de la homologación / *Approval granted*
- ~~extensión de homologación~~ / *Approval extended*
- ~~denegación de la homologación~~ / *Approval refused*
- ~~retirada de la homologación~~ / *Approval withdrawn*
- ~~cese definitivo de la producción~~ / *Production definitely discontinued*

de un tipo de neumático en aplicación del Reglamento nº 54 / *of a type of pneumatic tyre for motor vehicles pursuant to Regulation N° 54.*

Nº homologación de tipo / *Approval No* : **E9\*54R00/23\*6066\*00**

Nº extensión / *Extension No.* : **00**

- Nombre y dirección del fabricante / *Manufacturer's name and adress*:  
LLIT (THAILAND) CO., LTD.  
911/9 Moo 5, Khaokhansong, Sriracha, Chonburi 20110, Thailand
- Designación de tipo de neumático / *Tyre type designation*:  
315/80R22.5 156/150L (154/150M)
- Marca(s) / Marca(s) comercial(es) / *Brand name(s)/trademark(s)*  
LINGLONG; SHANLING; LEAO; Infinity; BENCHMARK; GREEN MAX; CROSSWIND; TECHKING; BARKLEY;  
ATLAS TIRE; SUMO FIRENZA; FULLMILE; ORNET; AUFINE; MAXELL; ANEMOI; HUBTRAC
- Descripción(es) comercial(es) / Nombre(s) comercial(es) / *Trade description(s) / Commercial name(s)*  
F865; A918; F860; SF860; LF860; BF860; ETS100; CWS10E; BL221; ETD100; CWD10E; GRD802; BL831; KTS300;  
CWS30K; TASK ST; BL223; KTD300; CWD30K; GRD806; TASK DH; BL833; KWS600; CWS60W; GWS828; BLW12;  
KWD600; CWD60W; GWD838; BLW18; BL806+; AP-100<sup>①</sup>; DRIVUS-WD; DRIVUS-WS; DRIVUS-S; DRIVUS-D; T-  
HYBRID D01; T-HYBRID S01; OT131; D920; ADW2; MRW2; AEL2; MAL2; ADR3; MRE3; HIGHWAY S11;  
HIGHWAY D11; REGIONAL D11; REGIONAL S11
- En su caso, nombre y dirección del representante del fabricante / *If applicable, name and address of manufacturer's representative*:  
---
- Breve descripción / *Summarized description*:
  - Tamaño del neumático / *Size of tyre*:  
315/80R22.5
  - Categoría de uso: ~~normal~~/nieve /~~especial~~ / *Category of use: normal/ snow / special* <sup>(1)</sup>
  - Estructura: ~~diagonal (cinturada)~~/radial / *Structure: diagonal (bias ply)/ radial* <sup>(1)</sup>
  - Clase del neumático / *Tyre class*: C2/C3
  - Código de velocidad / *Speed category symbol*:

(1) Táchese lo que no proceda / *Strike out what does not apply*





E9\*54R00/23\*6066\*00

Página / Page 2/ 2

4.5.1. Nominal / *Nominal*: L

4.5.2. Adicional (en su caso) / *Additional (if applicable)*: M

4.6 Índice de capacidad de carga / *Load-capacity index*:

4.6.1. Correspondiente a la velocidad nominal: simple 156 / gemelo (doble) 150  
*Corresponding to nominal speed: single 156 / twinned (dual) 150*

4.6.2. Correspondiente a velocidad adicional: simple 154 / gemelo (doble) 150  
*Corresponding to additional speed: single 154 / twinned (dual) 150*

5. Servicio técnico y, en su caso, laboratorio de ensayo acreditado para la homologación o para la verificación de la conformidad / *Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity*:  
IDIADA

6. Fecha del informe emitido por este servicio / *Date of report issued by that service*: 16/03/2021

7. Número del informe emitido por este servicio / *Number of report issued by that service*: CN21010109

8. Motivo(s) de la(s) extensión(es), en su caso / *Reason(s) of extension (if applicable)*: N/A

9. Observaciones / *Any remarks*: N/A

10. Lugar / *Place*: Madrid

11. Fecha / *Date*: Ver firma electrónica / *See electronic signature*

12. Firma / *Signature*: EL SUBDIRECTOR GENERAL DE CALIDAD Y SEGURIDAD INDUSTRIAL  
Resolución P.D. del DIRECTOR GENERAL DE INDUSTRIA Y DE LA PYME de 25-10-2012

13. Se adjunta a la presente notificación una lista de los documentos que figuran en el expediente de homologación depositado en los servicios administrativos que han expedido la homologación y que podrán obtenerse previa petición / *Annexed to this communication is a list of documents in the approval file deposited at the Type Approval Authorities having delivered the approval and which can be obtained upon request.*

- Informe de ensayo / *Test report.*
- Documentación técnica / *Technical documentation.*

(1) Táchese lo que no proceda / *Strike out what does not apply*



**INFORME N° / REPORT No. CN21010109****HOMOLOGACIÓN DE NEUMÁTICOS PARA VEHÍCULOS INDUSTRIALES  
Y SUS REMOLQUES SEGÚN EL REGLAMENTO UN N° 54R00/23 /  
APPROVAL OF PNEUMATIC TYRES FOR COMMERCIAL VEHICLES  
AND THEIR TRAILERS REFERRING TO UN REGULATION NO. 54R00/23**

Fabricante / *Manufacturer* : LLIT (THAILAND) CO., LTD.  
911/9 Moo 5, Khaokhansong, Sriracha, Chonburi 20110,  
Thailand

Marca(s) / *Trade mark(s)* : LINGLONG; SHANLING; LEAO; Infinity; BENCHMARK;  
GREEN MAX; CROSSWIND; TECHKING; BARKLEY; ATLAS TIRE; SUMO FIRENZA; FULLMILE;  
ORNET; AUFINE; MAXELL; ANEMOI; HUBTRAC

Banda de rodadura / *Tread pattern* : F865; A918; F860; SF860; LF860; BF860; ETS100; CWS10E;  
BL221; ETD100; CWD10E; GRD802; BL831; KTS300; CWS30K; TASK ST; BL223; KTD300; CWD30K;  
GRD806; TASK DH; BL833; KWS600; CWS60W; GWS828; BLW12; KWD600; CWD60W; GWD838; BLW18;  
BL806+; AP-100<sup>Ⓢ</sup>; DRIVUS-WD; DRIVUS-WS; DRIVUS-S; DRIVUS-D; T-HYBRID D01; T-HYBRID S01;  
OT131; D920; ADW2; MRW2; AEL2; MAL2; ADR3; MRE3; HIGHWAY S11; HIGHWAY D11; REGIONAL  
D11; REGIONAL S11

Designación de tipo de neumático /  
*Tyre type designation(s)* : 315/80R22.5 156/150L (154/150M)

Designación dimensional del neumático /  
*Tyre size designation* : 315/80R22.5

Lugar y fecha de emisión del informe /  
*Place and date of test report issue* : L'Albornar, Santa Oliva (Tarragona)  
16/03/2021

**CONCLUSIONES/CONCLUSIONS:** El neumático ensayado **CUMPLE** con las prescripciones uniformes relativas a la homologación de neumáticos según el Reglamento UN N° 54R00/23, tal y como se especifica en el anexo a este informe. / *Tested pneumatic tyre **FULFILLS** with the specifications regarding to the type approval of approval of pneumatic tyre referring to the UN Regulation NO. 54R00/23 as specified in the annex of this report.*

Realizado / *Performed by:*Vº.Bº. / *Revised by:*  
Mingjun Wu  
HOMOLOGATION ENGINEER  
Josep Masip Gomez  
DEPARTMENT MANAGER

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.  
*THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE*

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
*THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN*



## ANEXO AL INFORME / ANNEX TO THE REPORT

Annex 1: The test results of construction variant 1: PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL + 3 STEEL are as follows:

### 1. DESCRIPCIÓN TÉCNICA DEL NEUMÁTICO / TECHNICAL DESCRIPTION OF THE PNEUMATIC TYRE:

|                                                               |   |                                                                                                                                             |
|---------------------------------------------------------------|---|---------------------------------------------------------------------------------------------------------------------------------------------|
| Marca(s) / Trade Mark(s)                                      | : | LINGLONG                                                                                                                                    |
| Banda de rodamiento / Tread pattern                           | : | ETS100                                                                                                                                      |
| Designación de tipo de neumático / Tyre type designation(s)   | : | 315/80R22.5 156/150L (154/150M)                                                                                                             |
| Designación dimensional del neumático / Tyre-size designation | : | 315/80R22.5                                                                                                                                 |
| Categoría de utilización / Category of use                    | : | <del>normal</del> /nieve/ <del>especial</del><br><del>normal</del> /snow/ <del>special</del>                                                |
| Estructura / Structure                                        | : | <del>diagonal</del> / <del>diagonal-cinturado</del> /radial<br><del>diagonal</del> / <del>bias-belted</del> /radial                         |
| Símbolo de categoría de velocidad / Speed category index      | : | nominal / nominal : L<br>adicional / additional : M                                                                                         |
| Índice de capacidad de carga / Load-capacity index            | : | nominal / nominal: simple / single : 156<br>doble / twinned : 150<br>adicional / additional: simple / single : 154<br>doble / twinned : 150 |
| X del fabricante / X of the manufacturer                      | : | 0.75                                                                                                                                        |
| Sección transversal del neumático / Tyre cross-section        | : | Ver documentación técnica / See technical documentation                                                                                     |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN ÚNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCIÓN PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



## 2. MARCAJE DEL NEUMATICO / TYRE MARKING

### 2.1. Marcaje obligatorio / Compulsory Marking

Marca de homologación / Approval mark

Altura de la marca de homologación / Approval mark Height a > 12 mm : YES

Altura del marcaje que define el neumático / Tyre definition marking height

Tamaño del neumático / Tyre size > 6 mm : YES

Índice de carga y velocidad / Load and speed index b > 6 mm : YES

### 2.2. Marcas adicionales / Additional Marking

“M+S” / “M.S” / “M&S” : M+S

“TUBELESS” : Marcado / Marked

Índice de la presión de inflado / Index of inflation pressure : 850 kPa

Estructura / Ply rating : N.A.

“ET” / “ML” / “MPT” / “POR” : N.A.

“REGROOVABLE” : Yes

Fecha de fabricación / Date of manufacture : 4220

Altura de estas marcas / Height of these marking c > 4 mm : Yes

## 3. DATOS DE ENSAYO / TEST RESULTS.

Fecha de recepción de la muestra / Sample Reception date : 22/02/2021

Fechas y lugar de ensayo / Place and test dates : 24/02/2021-27/02/2021  
LINGLONG Test Center (Zhaoyuan, China)

Identificación de la muestra / Sample Id. : CN21010109

Código de llanta de medida / Measure rim code : 9.00J x 22.5”

Código de llanta de ensayo / Test rim Code : 9.00J x 22.5”

### 3.1. Medida del neumático / Pneumatic tyre measurement

Primera presión de inflado en llanta de medida / First pressure in measuring rim : P(1m) = 8.5 bar

Segunda presión de inflado en llanta de medida según Anexo 6 de R54 ECE / Second pressure in measure rim according Annex 6 of R54 ECE : P(2m) = 8.5 bar

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.  
THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



### 3.1.1. Medición de la sección del neumático/ Tyre width measurement:

Medidas de **anchura total** en seis puntos espaciados de forma regular: /  
Measures of **overall width** at six equally-spaced points:

| Punto / Point | Anchura total / Overall width (mm)  |
|---------------|-------------------------------------|
| 1             | 317.0                               |
| 2             | 316.8                               |
| 3             | 316.7                               |
| 4             | 317.1                               |
| 5             | 317.3                               |
| 6             | 317.4                               |
| Punto / Point | Anchura maxima / Maximum width (mm) |
| 6             | 317.4                               |

### 3.1.2. Cálculo de la sección del neumático/ Tyre section width calculation:

S = 312 (mm) given by Annex 5/Calculated

O/Or

$$S = S_1 + K(A - A_1)$$

|                                                                     |        |
|---------------------------------------------------------------------|--------|
| Anchura nominal de sección (mm) /<br>Nominal section width (mm)     | 315    |
| Coefficiente K /<br>K coefficient                                   | 0.4    |
| Anchura de la llanta de medición (mm) /<br>Measuring rim Width (mm) | 228.6  |
| X del fabricante /<br>X of the manufacturer                         | 0.75   |
| Anchura de la llanta teórica (mm) /<br>Theoretical rim Width (mm)   | 236.25 |

| Anchura maxima medida /<br>Maximum measured width<br>(mm) | Anchura de sección /<br>section width (mm) | Diferencia /<br>Difference (%) |
|-----------------------------------------------------------|--------------------------------------------|--------------------------------|
| S <sub>M</sub> = 317.4                                    | S = 312                                    | 1.73                           |

La anchura total del neumático puede ser inferior a la anchura de sección calculada en los siguientes porcentajes: 8% estructura diagonal; 4 % estructura radial. Por secciones que accedan los 305 mm no podrán superar el valor en los siguientes porcentajes: : 4% estructura diagonal, el 2% de la estructura radial nominal de aspecto superior a 60. / The overall width of a tyre may be less than the section or exceed the value by the following percentages: 8% structure diagonal; 4 % structure radial. For section with exceed 305mm shall not exceed the value by the following percentages: 4% structure diagonal; 2 % structure radial of nominal aspect higher than 60.

CUMPLE / NO-CUMPLE  
FULFILS / DOES NOT FULFIL

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



### 3.1.3. Medida de diámetro exterior / Outer diameter measurement

| Circunferencia máxima /<br>Maximum circumference (mm) | Diámetro exterior /<br>Outer diameter (mm)<br>$D_{ext} = \frac{L}{\pi}$ |
|-------------------------------------------------------|-------------------------------------------------------------------------|
| 3400                                                  | 1082.3                                                                  |

### 3.1.4. Cálculo del diámetro exterior del neumático/ Tyre outer diameter calculation:

$$D = d + 2H$$

|                                                                                                           |                                                                               |
|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Numero convencional del diametro nominal de la llanta (mm)/<br>Conventional number of the nominal rim(mm) | <b>d = 572 mm</b>                                                             |
| Ancho nominal de sección (mm) /<br>Nominal section width (mm)                                             | <b>315</b>                                                                    |
| Relación nominal de aspecto /<br>Nominal aspect ratio                                                     | <b>80</b>                                                                     |
| Factor a /<br>a Factor                                                                                    | <b>0.97</b>                                                                   |
| Factor b /<br>b Factor                                                                                    | Radial:1.04 (Normal), 1.07(Annex 5)<br>Diagonal:1.07 ( Normal), 1.09(Special) |
| Altura nominal de sección (mm) /<br>Nominal section height (mm)                                           | <b>H = 252 mm</b>                                                             |

| <b>Dmin</b><br>$D_{min} = d + 2(H \times a)$ | <b>Diametro exterior (medido) /</b><br><b>Outer diameter (measured)</b> | <b>Dmax</b><br>$D_{max} = d + 2(H \times b)$ |
|----------------------------------------------|-------------------------------------------------------------------------|----------------------------------------------|
| <b>1060 mm</b>                               | <b>1082.3 mm</b>                                                        | <b>1106 mm</b>                               |
| <b>Dmin &lt; D &lt; Dmax</b>                 |                                                                         |                                              |

CUMPLE / NO-CUMPLE  
FULFILLS / DOES NOT FULFIL

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



### 3.2 Ensayo de carga/velocidad / *Load/speed performance test*

#### 3.2.1 Neumáticos con símbolo de categoría de velocidad Q o superior: *For tyres with speed category symbol Q and above:*

##### Condiciones del ensayo / *Test Conditions*

|                                                                                            |      |
|--------------------------------------------------------------------------------------------|------|
| Categoría de velocidad / <i>Speed category</i>                                             | N.A. |
| Índice capacidad de carga / <i>Load capacity index</i>                                     | N.A. |
| Velocidad máxima (km/h) /<br><i>Maximum velocity (km/h)</i>                                | N.A. |
| Carga aplicada al eje (kg) /<br><i>Test axle load (kg)</i>                                 | N.A. |
| Velocidad máxima durante el ensayo (km/h) /<br><i>Maximum speed during the test (km/h)</i> | N.A. |
| Carga del eje durante el ensayo (kg)/<br><i>Load of axle during the test (kg)</i>          | N.A. |
| Presión de inflado en llanta de ensayo (bar) /<br><i>Pressure in test rim (bar)</i>        | N.A. |
| Diámetro del tambor de ensayo (m) /<br><i>Test wheel diameter (m)</i>                      | N.A. |
| Temperatura (°C) /<br><i>Temperature (°C)</i>                                              | N.A. |

##### Ciclo de ensayo / *Test cycle*

| Tramo /<br><i>Step</i> | Duración (min)/<br><i>Duration (min)</i> | Velocidad (km/h) /<br><i>Speed (km/h)</i> |
|------------------------|------------------------------------------|-------------------------------------------|
| 1                      | N.A.                                     | N.A.                                      |
| 2                      | N.A.                                     | N.A.                                      |
| 3                      | N.A.                                     | N.A.                                      |
| 4                      | N.A.                                     | N.A.                                      |
| TOTAL / <i>TOTAL</i>   | N.A.                                     |                                           |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN ÚNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCIÓN PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN





### 3.2.2 Neumáticos con símbolo de categoría de velocidad P o inferior:

*Tyres with speed category symbol P and below:*

- Attachment 1: Test result of Nominal Load/Speed Combination (156/150L)
- Attachment 2: Test result of Additional Load/Speed Combination (154/150M)

#### Attachment 1: Test result of Nominal Load/Speed Combination (156/150L)

#### Condiciones del ensayo / Test Conditions

|                                                                                                 |      |
|-------------------------------------------------------------------------------------------------|------|
| Categoría de velocidad / <i>Speed category</i>                                                  | L    |
| Índice capacidad de carga / <i>Load capacity index</i>                                          | 156  |
| Velocidad máxima (km/h) / <i>Maximum velocity (km/h)</i>                                        | 120  |
| Velocidad del prueba de tambor el ensayo (km/h) / <i>Test drum speed during the test (km/h)</i> | 64   |
| Carga del eje durante el ensayo (kg)(100%)/ <i>Load of axle during the test (kg) (100%)</i>     | 4000 |
| Presión de inflado en llanta de ensayo (bar) / <i>Pressure in test rim (bar)</i>                | 850  |
| Diámetro del tambor de ensayo (m) / <i>Test wheel diameter (m)</i>                              | 1.7  |
| Temperatura (°C) / <i>Temperature (°C)</i>                                                      | 27   |

#### Ciclo de ensayo / Test cycle

| Tramo / <i>Step</i>  | Duración (h)/ <i>Duration (h)</i> | Carga (kg) / <i>Load (kg)</i> |      |
|----------------------|-----------------------------------|-------------------------------|------|
| 1                    | 7                                 | 66%                           | 2640 |
| 2                    | 16                                | 84%                           | 3360 |
| 3                    | 24                                | 101%                          | 4040 |
| TOTAL / <i>TOTAL</i> | 47                                |                               |      |

### 3.2.3 Medición del neumático / Tyre measurement

|                                                                                                                                  |           |
|----------------------------------------------------------------------------------------------------------------------------------|-----------|
| Medición del diámetro exterior antes del ensayo / <i>Outer diameter measurement at the start of test</i>                         | 1082.3 mm |
| Medición del diámetro exterior después del ensayo / <i>Outer diameter measurement at the end of test</i>                         | 1086.1 mm |
| Porcentaje del cambio en la medida del diámetro exterior (%) / <i>Percentage of the change in outer diameter measurement (%)</i> | 0.35      |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN


**Attachment 2: Test result of Additional Load/Speed Combination (154/150M)**
**Condiciones del ensayo / Test Conditions**

|                                                                                                 |      |
|-------------------------------------------------------------------------------------------------|------|
| Categoría de velocidad / <i>Speed category</i>                                                  | M    |
| Índice capacidad de carga / <i>Load capacity index</i>                                          | 154  |
| Velocidad máxima (km/h) / <i>Maximum velocity (km/h)</i>                                        | 130  |
| Velocidad del prueba de tambor el ensayo (km/h) / <i>Test drum speed during the test (km/h)</i> | 72   |
| Carga del eje durante el ensayo (kg)(100%)/ <i>Load of axle during the test (kg) (100%)</i>     | 3750 |
| Presión de inflado en llanta de ensayo (bar) / <i>Pressure in test rim (bar)</i>                | 850  |
| Diámetro del tambor de ensayo (m) / <i>Test wheel diameter (m)</i>                              | 1.7  |
| Temperatura (°C) / <i>Temperature (°C)</i>                                                      | 27   |

**Ciclo de ensayo / Test cycle**

| Tramo / <i>Step</i>  | Duración (h)/ <i>Duration (h)</i> | Carga (kg) / <i>Load (kg)</i> |        |
|----------------------|-----------------------------------|-------------------------------|--------|
| 1                    | 7                                 | 66%                           | 2475   |
| 2                    | 16                                | 84%                           | 3150   |
| 3                    | 24                                | 101%                          | 3787.5 |
| TOTAL / <i>TOTAL</i> | 47                                |                               |        |

**3.2.3 Medición del neumático / Tyre measurement**

|                                                                                                                                  |           |
|----------------------------------------------------------------------------------------------------------------------------------|-----------|
| Medición del diámetro exterior antes del ensayo / <i>Outer diameter measurement at the start of test</i>                         | 1071.1 mm |
| Medición del diámetro exterior después del ensayo / <i>Outer diameter measurement at the end of test</i>                         | 1074.0 mm |
| Porcentaje del cambio en la medida del diámetro exterior (%) / <i>Percentage of the change in outer diameter measurement (%)</i> | 0.27      |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



### 3.3. Resultados de ensayo / Test results

3.3.1. El diámetro exterior del neumático, medido seis horas después del ensayo de resistencia carga/velocidad, no debe diferir más de  $\pm 3,5$  % respecto del diámetro exterior medido antes del ensayo. *The outer diameter of the tyre, measured six hours after the load/speed endurance test, must not differ by more than  $\pm 3.5\%$  from the outer diameter as measured before the test.*

CUMPLE / ~~NO CUMPLE~~  
FULFILS / ~~DOES NOT FULFIL~~

3.3.2. Una vez superado el ensayo de resistencia carga/velocidad, el neumático no debe presentar ningún despegue de la banda de rodadura, las lonas ni los cables, ni presentar arrancamientos de la banda de rodamiento ni rotura de los cables. *Once passed the load/speed endurance test, the tyre must not exhibit any tread separation, ply separation, cord separation, chunking or broken cords.*

CUMPLE / ~~NO CUMPLE~~  
FULFILS / ~~DOES NOT FULFIL~~

Lugar del ensayo / Test Place : LINGLONG Test Center (Zhaoyuan, China)  
Fecha del ensayo / Test Date : 24/02/2021-27/02/2021

Validate this report with the security code «HXQYSWGQ» at: <https://extranet.idiada.com/hom-cve>

IDIADA CN21010109

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.  
THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



Annex 2: The test results of construction variant 1: PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL + 4 STEEL are as follows:

#### 4. DESCRIPCIÓN TÉCNICA DEL NEUMÁTICO / *TECHNICAL DESCRIPTION OF THE PNEUMATIC TYRE:*

|                                                                      |   |                                                                                                                                |                              |
|----------------------------------------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| Marca(s) / <i>Trade Mark(s)</i>                                      | : | LINGLONG                                                                                                                       |                              |
| Banda de rodamiento / <i>Tread pattern</i>                           | : | ETS100                                                                                                                         |                              |
| Designación de tipo de neumático / <i>Tyre type designation(s)</i>   | : | 315/80R22.5 156/150L (154/150M)                                                                                                |                              |
| Designación dimensional del neumático / <i>Tyre-size designation</i> | : | 315/80R22.5                                                                                                                    |                              |
| Categoría de utilización / <i>Category of use</i>                    | : | <del>normal</del> /nieve/ <del>especial</del><br><del>normal</del> /snow/ <del>special</del>                                   |                              |
| Estructura / <i>Structure</i>                                        | : | <del>diagonal</del> / <del>diagonal</del> <del>cinturado</del> /radial<br><del>diagonal</del> / <del>bias-belted</del> /radial |                              |
| Símbolo de categoría de velocidad / <i>Speed category index</i>      | : | nominal / <i>nominal</i>                                                                                                       | L                            |
|                                                                      | : | adicional / <i>additional</i>                                                                                                  | M                            |
| Índice de capacidad de carga / <i>Load-capacity index</i>            | : | nominal / <i>nominal</i> :                                                                                                     | simple / <i>single</i> : 156 |
|                                                                      | : |                                                                                                                                | doble / <i>twinned</i> : 150 |
|                                                                      | : | adicional / <i>additional</i> :                                                                                                | simple / <i>single</i> : 154 |
|                                                                      | : |                                                                                                                                | doble / <i>twinned</i> : 150 |
| X del fabricante / <i>X of the manufacturer</i>                      | : | 0.75                                                                                                                           |                              |
| Sección transversal del neumático / <i>Tyre cross-section</i>        | : | Ver documentación técnica /<br><i>See technical documentation</i>                                                              |                              |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN ÚNICAMENTE A LA MUESTRA ENSAYADA.

*THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE*

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCIÓN PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
*THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN*



## 5. MARCAJE DEL NEUMATICO / TYRE MARKING

### 5.1. Marcaje obligatorio / Compulsory Marking

Marca de homologación / Approval mark

Altura de la marca de homologación / Approval mark Height a > 12 mm : YES

Altura del marcaje que define el neumático / Tyre definition marking height

Tamaño del neumático / Tyre size > 6 mm : YES

Índice de carga y velocidad / Load and speed index b > 6 mm : YES

### 5.2. Marcas adicionales / Additional Marking

“M+S” / “M.S” / “M&S” : M+S

“TUBELESS” : Marcado / Marked

Índice de la presión de inflado / Index of inflation pressure : 850 kPa

Estructura / Ply rating : N.A.

“ET” / “ML” / “MPT” / “POR” : N.A.

“REGROOVABLE” : Yes

Fecha de fabricación / Date of manufacture : 3120

Altura de estas marcas / Height of these marking c > 4 mm : Yes

## 6. DATOS DE ENSAYO / TEST RESULTS.

Fecha de recepción de la muestra / Sample Reception date : 22/02/2021

Fechas y lugar de ensayo / Place and test dates : 24/02/2021-27/02/2021  
LINGLONG Test Center (Zhaoyuan, China)

Identificación de la muestra / Sample Id. : CN21010109

Código de llanta de medida / Measure rim code : 9.00J x 22.5”

Código de llanta de ensayo / Test rim Code : 9.00J x 22.5”

### 6.1. Medida del neumático / Pneumatic tyre measurement

Primera presión de inflado en llanta de medida / First pressure in measuring rim : P(1m) = 8.5 bar

Segunda presión de inflado en llanta de medida según Anexo 6 de R54 ECE / Second pressure in measure rim according Annex 6 of R54 ECE : P(2m) = 8.5 bar

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.  
THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN


**6.1.1. Medición de la sección del neumático/ Tyre width measurement:**

Medidas de **anchura total** en seis puntos espaciados de forma regular: /  
Measures of **overall width** at six equally-spaced points:

| Punto / Point | Anchura total / Overall width (mm)  |
|---------------|-------------------------------------|
| 1             | 313.8                               |
| 2             | 313.9                               |
| 3             | 313.5                               |
| 4             | 313.5                               |
| 5             | 313.8                               |
| 6             | 313.9                               |
| Punto / Point | Anchura maxima / Maximum width (mm) |
| 2, 6          | 313.9                               |

**6.1.2. Cálculo de la sección del neumático/ Tyre section width calculation:**

S = 312 (mm) given by Annex 5/Calculated

O/Or

$$S = S_1 + K(A - A_1)$$

|                                                                     |        |
|---------------------------------------------------------------------|--------|
| Anchura nominal de sección (mm) /<br>Nominal section width (mm)     | 315    |
| Coefficiente K /<br>K coefficient                                   | 0.4    |
| Anchura de la llanta de medición (mm) /<br>Measuring rim Width (mm) | 228.6  |
| X del fabricante /<br>X of the manufacturer                         | 0.75   |
| Anchura de la llanta teórica (mm) /<br>Theoretical rim Width (mm)   | 236.25 |

| Anchura maxima medida /<br>Maximum measured width<br>(mm) | Anchura de sección /<br>section width (mm) | Diferencia /<br>Difference (%) |
|-----------------------------------------------------------|--------------------------------------------|--------------------------------|
| S <sub>M</sub> = 313.9                                    | S = 312                                    | 0.61                           |

La anchura total del neumático puede ser inferior a la anchura de sección calculada en los siguientes porcentajes: 8% estructura diagonal; 4 % estructura radial. Por secciones que accedan los 305 mm no podrán superar el valor en los siguientes porcentajes: : 4% estructura diagonal, el 2% de la estructura radial nominal de aspecto superior a 60. / The overall width of a tyre may be less than the section or exceed the value by the following percentages: 8% structure diagonal; 4 % structure radial. For section with exceed 305mm shall not exceed the value by the following percentages: 4% structure diagonal; 2 % structure radial of nominal aspect higher than 60.

CUMPLE / NO-CUMPLE  
FULFILS / DOES NOT FULFIL

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



### 6.1.3. Medida de diámetro exterior / Outer diameter measurement

| Circunferencia máxima /<br>Maximum circumference (mm) | Diámetro exterior /<br>Outer diameter (mm)<br>$D_{ext} = \frac{L}{\pi}$ |
|-------------------------------------------------------|-------------------------------------------------------------------------|
| 3382                                                  | 1076.5                                                                  |

### 6.1.4. Cálculo del diámetro exterior del neumático/ Tyre outer diameter calculation:

$$D = d + 2H$$

|                                                                                                           |                                                                               |
|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Numero convencional del diametro nominal de la llanta (mm)/<br>Conventional number of the nominal rim(mm) | <b>d = 572 mm</b>                                                             |
| Ancho nominal de sección (mm) /<br>Nominal section width (mm)                                             | <b>315</b>                                                                    |
| Relación nominal de aspecto /<br>Nominal aspect ratio                                                     | <b>80</b>                                                                     |
| Factor a /<br>a Factor                                                                                    | <b>0.97</b>                                                                   |
| Factor b /<br>b Factor                                                                                    | Radial:1.04 (Normal), 1.07(Annex 5)<br>Diagonal:1.07 ( Normal), 1.09(Special) |
| Altura nominal de sección (mm) /<br>Nominal section height (mm)                                           | <b>H = 252 mm</b>                                                             |

| Dmin<br>$D_{min} = d + 2(H \times a)$ | Diametro exterior (medido) /<br>Outer diameter (measured) | Dmax<br>$D_{max} = d + 2(H \times b)$ |
|---------------------------------------|-----------------------------------------------------------|---------------------------------------|
| <b>1060 mm</b>                        | <b>1076.5 mm</b>                                          | <b>1106 mm</b>                        |
| <b>Dmin &lt; D &lt; Dmax</b>          |                                                           |                                       |

CUMPLE / ~~NO CUMPLE~~  
FULFILLS / ~~DOES NOT FULFIL~~

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



## 6.2 Ensayo de carga/velocidad / Load/speed performance test

### 6.2.1 Neumáticos con símbolo de categoría de velocidad Q o superior: For tyres with speed category symbol Q and above:

#### Condiciones del ensayo / Test Conditions

|                                                                                            |      |
|--------------------------------------------------------------------------------------------|------|
| Categoría de velocidad / <i>Speed category</i>                                             | N.A. |
| Índice capacidad de carga / <i>Load capacity index</i>                                     | N.A. |
| Velocidad máxima (km/h) /<br><i>Maximum velocity (km/h)</i>                                | N.A. |
| Carga aplicada al eje (kg) /<br><i>Test axle load (kg)</i>                                 | N.A. |
| Velocidad máxima durante el ensayo (km/h) /<br><i>Maximum speed during the test (km/h)</i> | N.A. |
| Carga del eje durante el ensayo (kg)/<br><i>Load of axle during the test (kg)</i>          | N.A. |
| Presión de inflado en llanta de ensayo (bar) /<br><i>Pressure in test rim (bar)</i>        | N.A. |
| Diámetro del tambor de ensayo (m) /<br><i>Test wheel diameter (m)</i>                      | N.A. |
| Temperatura (°C) /<br><i>Temperature (°C)</i>                                              | N.A. |

#### Ciclo de ensayo / Test cycle

| Tramo /<br><i>Step</i> | Duración (min)/<br><i>Duration (min)</i> | Velocidad (km/h) /<br><i>Speed (km/h)</i> |
|------------------------|------------------------------------------|-------------------------------------------|
| 1                      | N.A.                                     | N.A.                                      |
| 2                      | N.A.                                     | N.A.                                      |
| 3                      | N.A.                                     | N.A.                                      |
| 4                      | N.A.                                     | N.A.                                      |
| TOTAL / TOTAL          | N.A.                                     |                                           |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN ÚNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCIÓN PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN





### 6.2.2 Neumáticos con símbolo de categoría de velocidad P o inferior:

*Tyres with speed category symbol P and below:*

- Attachment 1: Test result of Nominal Load/Speed Combination (156/150L)
- Attachment 2: Test result of Additional Load/Speed Combination (154/150M)

#### Attachment 1: Test result of Nominal Load/Speed Combination (156/150L)

#### Condiciones del ensayo / Test Conditions

|                                                                                                 |      |
|-------------------------------------------------------------------------------------------------|------|
| Categoría de velocidad / <i>Speed category</i>                                                  | L    |
| Índice capacidad de carga / <i>Load capacity index</i>                                          | 156  |
| Velocidad máxima (km/h) / <i>Maximum velocity (km/h)</i>                                        | 120  |
| Velocidad del prueba de tambor el ensayo (km/h) / <i>Test drum speed during the test (km/h)</i> | 64   |
| Carga del eje durante el ensayo (kg)(100%)/ <i>Load of axle during the test (kg) (100%)</i>     | 4000 |
| Presión de inflado en llanta de ensayo (bar) / <i>Pressure in test rim (bar)</i>                | 850  |
| Diámetro del tambor de ensayo (m) / <i>Test wheel diameter (m)</i>                              | 1.7  |
| Temperatura (°C) / <i>Temperature (°C)</i>                                                      | 27   |

#### Ciclo de ensayo / Test cycle

| Tramo / <i>Step</i>  | Duración (h)/ <i>Duration (h)</i> | Carga (kg) / <i>Load (kg)</i> |      |
|----------------------|-----------------------------------|-------------------------------|------|
| 1                    | 7                                 | 66%                           | 2640 |
| 2                    | 16                                | 84%                           | 3360 |
| 3                    | 24                                | 101%                          | 4040 |
| TOTAL / <i>TOTAL</i> | 47                                |                               |      |

### 3.2.3 Medición del neumático / Tyre measurement

|                                                                                                                                  |           |
|----------------------------------------------------------------------------------------------------------------------------------|-----------|
| Medición del diámetro exterior antes del ensayo / <i>Outer diameter measurement at the start of test</i>                         | 1076.5 mm |
| Medición del diámetro exterior después del ensayo / <i>Outer diameter measurement at the end of test</i>                         | 1078.1 mm |
| Porcentaje del cambio en la medida del diámetro exterior (%) / <i>Percentage of the change in outer diameter measurement (%)</i> | 0.15      |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



## Attachment 2: Test result of Additional Load/Speed Combination (154/150M)

### Condiciones del ensayo / Test Conditions

|                                                                                                 |      |
|-------------------------------------------------------------------------------------------------|------|
| Categoría de velocidad / <i>Speed category</i>                                                  | M    |
| Índice capacidad de carga / <i>Load capacity index</i>                                          | 154  |
| Velocidad máxima (km/h) / <i>Maximum velocity (km/h)</i>                                        | 130  |
| Velocidad del prueba de tambor el ensayo (km/h) / <i>Test drum speed during the test (km/h)</i> | 72   |
| Carga del eje durante el ensayo (kg)(100%)/ <i>Load of axle during the test (kg) (100%)</i>     | 3750 |
| Presión de inflado en llanta de ensayo (bar) / <i>Pressure in test rim (bar)</i>                | 850  |
| Diámetro del tambor de ensayo (m) / <i>Test wheel diameter (m)</i>                              | 1.7  |
| Temperatura (°C) / <i>Temperature (°C)</i>                                                      | 27   |

### Ciclo de ensayo / Test cycle

| Tramo / <i>Step</i>  | Duración (h)/ <i>Duration (h)</i> | Carga (kg) / <i>Load (kg)</i> |        |
|----------------------|-----------------------------------|-------------------------------|--------|
| 1                    | 7                                 | 66%                           | 2475   |
| 2                    | 16                                | 84%                           | 3150   |
| 3                    | 24                                | 101%                          | 3787.5 |
| TOTAL / <i>TOTAL</i> | 47                                |                               |        |

### 3.2.3 Medición del neumático / Tyre measurement

|                                                                                                                                  |           |
|----------------------------------------------------------------------------------------------------------------------------------|-----------|
| Medición del diámetro exterior antes del ensayo / <i>Outer diameter measurement at the start of test</i>                         | 1076.5 mm |
| Medición del diámetro exterior después del ensayo / <i>Outer diameter measurement at the end of test</i>                         | 1077.5 mm |
| Porcentaje del cambio en la medida del diámetro exterior (%) / <i>Percentage of the change in outer diameter measurement (%)</i> | 0.09      |

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



### 6.3. Resultados de ensayo / Test results

6.3.1. El diámetro exterior del neumático, medido seis horas después del ensayo de resistencia carga/velocidad, no debe diferir más de  $\pm 3,5$  % respecto del diámetro exterior medido antes del ensayo. The *outer diameter of the tyre, measured six hours after the load/speed endurance test, must not differ by more than  $\pm 3.5\%$  from the outer diameter as measured before the test.*

CUMPLE / ~~NO CUMPLE~~  
FULFILS / ~~DOES NOT FULFIL~~

6.3.2. Una vez superado el ensayo de resistencia carga/velocidad, el neumático no debe presentar ningún despegue de la banda de rodadura, las lonas ni los cables, ni presentar arrancamientos de la banda de rodamiento ni rotura de los cables. / *Once passed the load/speed endurance test, the tyre must not exhibit any tread separation, ply separation, cord separation, chunking or broken cords.*

CUMPLE / ~~NO CUMPLE~~  
FULFILS / ~~DOES NOT FULFIL~~

Lugar del ensayo / Test Place : LINGLONG Test Center (Zhaoyuan, China)  
Fecha del ensayo / Test Date : 24/02/2021-27/02/2021

  
Mingjun Wu  
HOMOLOGATION ENGINEER

\* LOS RESULTADOS PRESENTADOS SE REFIEREN UNICAMENTE A LA MUESTRA ENSAYADA.  
THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE  
\* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCION PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.  
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN

TECHNICAL DOCUMENTATION


**APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE ACCORDING TO ECE REGULATION No. 54,  
00 SERIES OF AMENDMENTS**

- |                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Manufacturer's name and address                                  | : LLIT(THAILAND)CO.,LTD.<br>911/9Moo5,Khaokhansong,Sriracha,<br>Chonburi20110,Thailand                                                                                                                                                                                                                                                                                                                                                                  |
| 2. Tyre type designation                                            | 315/80R22.5 156/150L(154/150M)                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 2.1 Brand-name(s)/trademark(s)                                      | :LINGLONG; SHANLING; LEAO; Infinity; BENCHMARK;<br>GREEN MAX; CROSSWIND; TECHKING; BARKLEY; ATLAS TIRE;<br>SUMO FIRENZA; FULLMILE; ORNET; AUFINE; MAXELL;<br>ANEMOI; HUBTRAC;                                                                                                                                                                                                                                                                           |
| 2.2 Trade description(s)/Commercial name(s)                         | : F865; A918; F860; SF860; LF860; BF860; ETS100; CWS10E; BL221;<br>ETD100; CWD10E; GRD802; BL831; KTS300; CWS30K; TASK ST;<br>BL223; KTD300; CWD30K; GRD806; TASK DH; BL833; KWS600;<br>CWS60W; GWS828; BLW12; KWD600; CWD60W; GWD838; BLW18;<br>BL806+; AP-100Q; DRIVUS-WD; DRIVUS-WS; DRIVUS-S; DRIVUS-D;<br>T-HYBRID D01; T-HYBRID S01; OT131; D920; ADW2; MRW2; AEL2;<br>MAL2; ADR3; MRE3; HIGHWAY S11; HIGHWAY D11;<br>REGIONAL D11; REGIONAL S11; |
| 3. If applicable, name and address of manufacturer's representative | : not applicable                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 4. Summarised description,                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 4.1. Tyre size designation                                          | : 315/80R22.5                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4.2. Category of use                                                | normal/special/snow                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 4.3. Structure                                                      | diagonal (bias-ply)/radial                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 4.4. Speed category symbol                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 4.4.1. Nominal                                                      | : L                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 4.4.2. Additional (if applicable)                                   | M                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 4.5. Load capacity indices                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 4.5.1. corresponding to nominal speed                               | : single:156, twinned(dual):150                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 4.5.2. corresponding to additional speed                            | : single:154, twinned(dual):150                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 5. Overall dimensions                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| overall section width                                               | 314                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| outer diameter                                                      | 1077                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 6. Factor 'x'                                                       | 0.75                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 7. Ply-rating number for diagonal (bias-ply) tyres                  | Not applicable                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 8. Rims on which the tyre can be mounted                            | : 9.75                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 9. Measuring rim and test rim                                       | 9.00                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 10. Tyre class                                                      | C2 / C3                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 11. State whether the tyre is                                       | tubeless / tube-type                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 12. Inflation pressure and index for measuring and testing          | see attached test report                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 13. Submitted for approval on (date)                                | Jan. 12, 2021                                                                                                                                                                                                                                                                                                                                                                                                                                           |

We herewith declare that we have not applied and will not apply for approval with another Contracting Party of the ECE for the same type of product.

MANUFACTURER'S STAMP

Signature :



.....  


Name: Ma Xiaogang

THIS APPLICATION IS ACCOMPANIED BY:

- Application form, relating to ECE approval for pneumatic tyre pursuant Regulation No.54
- A drawing of the tyre's side wall, tread and dimensioned cross section.
- The test report.

CN21010109

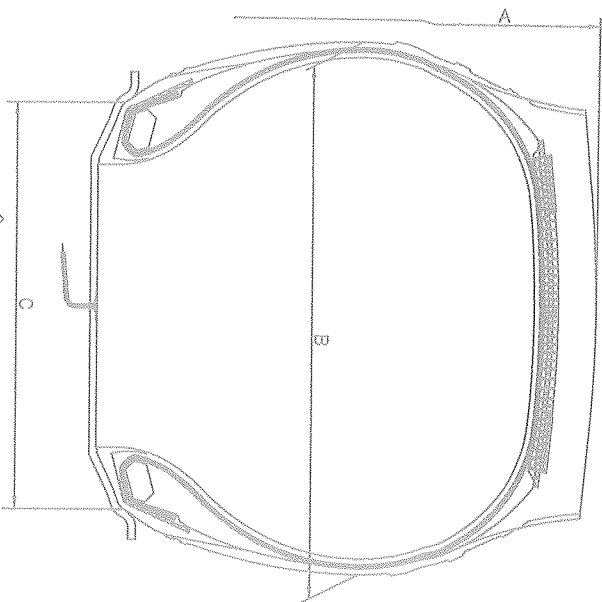

TREAD  
PATTERNS






TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| BARKLEY    | BL806+             |

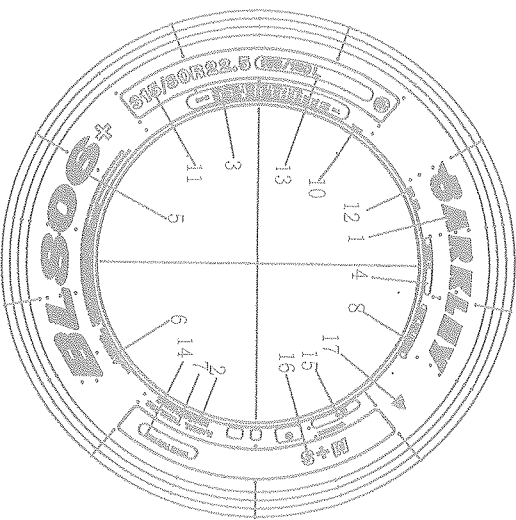

UPPER MOLD

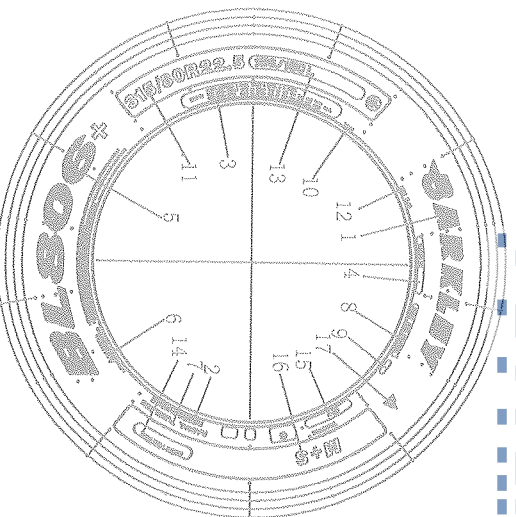

LOWER MOLD

|    |                                                                                                                                                                                          |                        |            |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------|
| 17 | A                                                                                                                                                                                        |                        |            |
| 16 | M+S                                                                                                                                                                                      |                        |            |
| 15 |                                                                                                                                                                                          | E9                     | 006066     |
| 14 | BRAND TYRE HERE                                                                                                                                                                          |                        |            |
| 13 | 156/150 L 850 kPa (154/150)                                                                                                                                                              |                        |            |
| 12 | RIM 9.00                                                                                                                                                                                 |                        |            |
| 11 | 315/80R22.5                                                                                                                                                                              |                        |            |
| 10 | **** (MOLD NUMBER)                                                                                                                                                                       |                        |            |
| 9  |                                                                                                                                                                                          | **** (PRODUCTION DATE) |            |
| 8  | DOT ...                                                                                                                                                                                  |                        |            |
| 7  | RADIAL TUBELESS                                                                                                                                                                          |                        |            |
| 6  | WARNING.....                                                                                                                                                                             |                        |            |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                       |                        |            |
| 4  | MADE IN THAILAND                                                                                                                                                                         |                        |            |
| 3  | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL *3 STEEL<br>20PR MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                        |            |
| 2  | REGROOVABLE                                                                                                                                                                              |                        |            |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                       |                        |            |
|    | UPPER MOLD                                                                                                                                                                               |                        | LOWER MOLD |

|             |                   |              |      |        |        |        |
|-------------|-------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (154/150) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX        | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:



张艳

Check by:


张艳

Draft by:


张艳

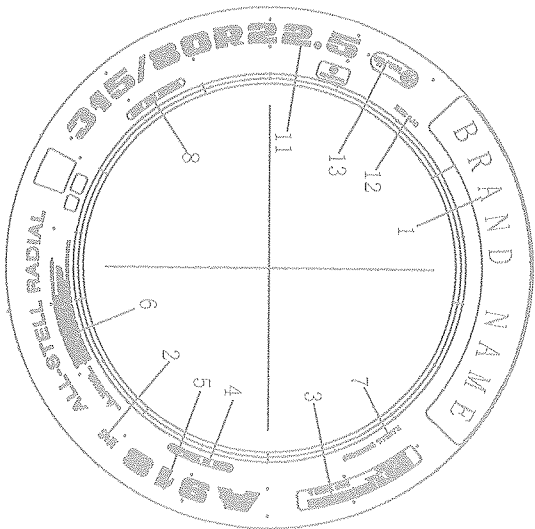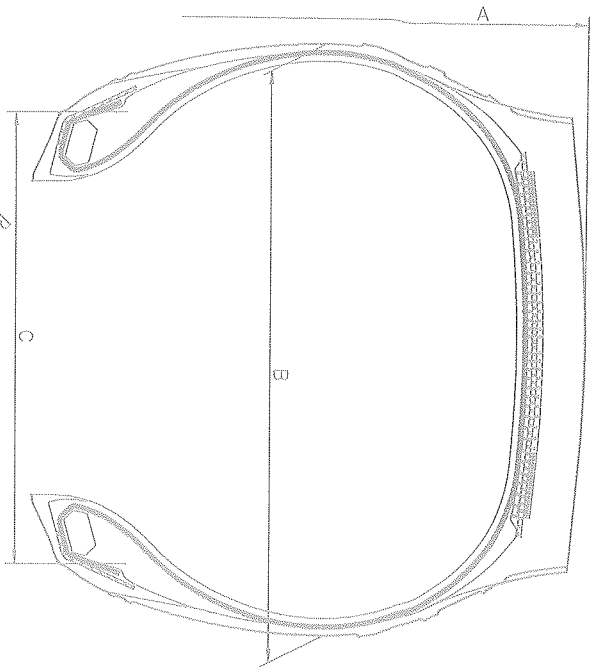

UPPER MOLD

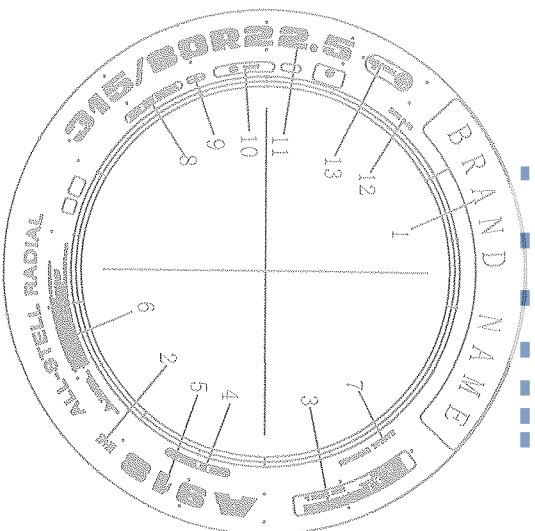

LOWER MOLD



TREAD PATTERNS




TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LINGLONG   | A918               |
| SHANLING   | A918               |
| LEAO       | A918               |
| Infinity   | A918               |
| Benchmark  | A918               |

|    |                                                                                                                                                                        |                       |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| 13 | 156/150 L AT 850 kPa (150)                                                                                                                                             |                       |
| 12 | RIM 9.00                                                                                                                                                               |                       |
| 11 | 315/80R22.5                                                                                                                                                            |                       |
| 10 |                                                                                                                                                                        | (E9) 006066           |
| 9  |                                                                                                                                                                        | *** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                |                       |
| 7  | RADIAL TUBELESS                                                                                                                                                        |                       |
| 6  | WARNING.....                                                                                                                                                           |                       |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                     |                       |
| 4  | MADE IN THAILAND                                                                                                                                                       |                       |
| 3  | MAY LOAD: SINGLE 8820 LBS (4000kg) AT 123PSI (850kPa) COLD<br>MAY LOAD: DUAL 7385 LBS (3350kg) AT 123PSI (850kPa) COLD<br>TREAD: 1 STEEL +3 STEEL<br>SIDEWALL: 1 STEEL | LOAD RANGE L          |
| 2  | M+S                                                                                                                                                                    |                       |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                     |                       |
|    | UPPER MOLD                                                                                                                                                             | LOWER MOLD            |

|             |               |              |      |        |        |        |
|-------------|---------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (150) | L (1)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX    | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Handwritten signature



Check by:

Handwritten signature

Draft by:

Handwritten signature



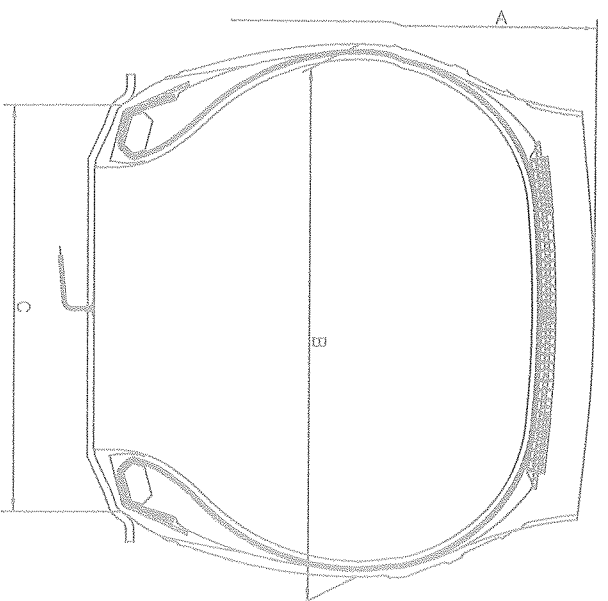

TREAD PATTERNS






TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LINGLONG   | F865               |
| SHANLING   | F865               |
| LEAO       | F865               |
| Infinity   | F865               |
| Benchmark  | F865               |

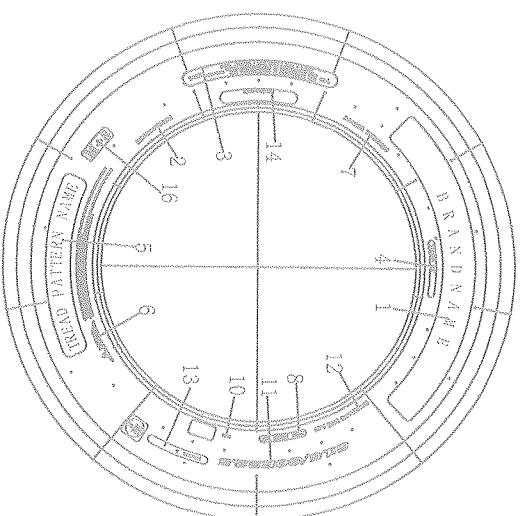

UPPER MOLD

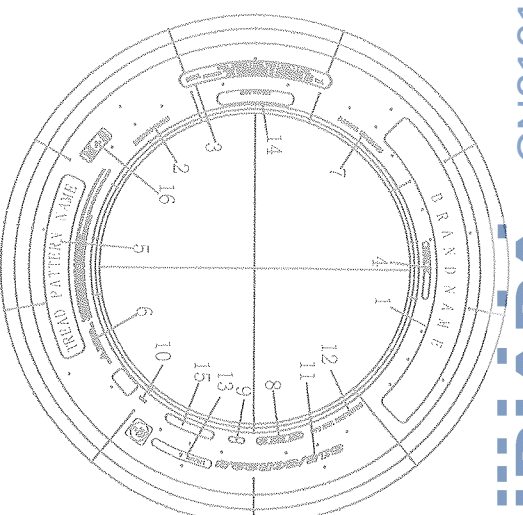

LOWER MOLD

|    |                                                                                                                                                                             |                         |
|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| 16 | M+S                                                                                                                                                                         |                         |
| 15 |                                                                                                                                                                             | E9 006066               |
| 14 | BRAND TYRE HERE                                                                                                                                                             |                         |
| 13 | 156/150 L 850 kPa (154/150)                                                                                                                                                 |                         |
| 12 | STANDARD RIM 9.00                                                                                                                                                           |                         |
| 11 | 315/80R22.5                                                                                                                                                                 |                         |
| 10 | ***** (MOLD NUMBER)                                                                                                                                                         |                         |
| 9  |                                                                                                                                                                             | ***** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                     |                         |
| 7  | RADIAL TUBELESS                                                                                                                                                             |                         |
| 6  | WARNING.....                                                                                                                                                                |                         |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                          |                         |
| 4  | MADE IN THAILAND                                                                                                                                                            |                         |
| 3  | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL +3 STEEL<br>20PR MAX LOAD: SINGLE LBS (4000 kg) AT 123 PSI (850 kPa) COLD L.R. L<br>DUAL 7885 LBS (3850 kg) AT 123 PSI (850 kPa) COLD |                         |
| 2  | REGROOVABLE                                                                                                                                                                 |                         |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                          |                         |
|    | UPPER MOLD                                                                                                                                                                  | LOWER MOLD              |

|             |                   |              |      |        |        |        |
|-------------|-------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (154/150) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX        | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Handwritten signature



Check by:

Handwritten signature

Draft by:

Handwritten signature



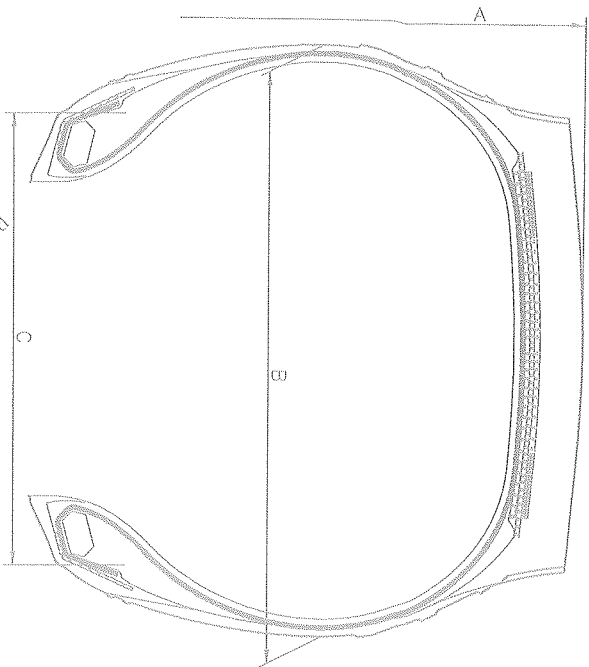

TREAD PATTERNS






TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LINGLONG   | F860               |
| SHANLING   | F860; SF860        |
| LEAO       | F860; LF860        |
| Infinity   | F860               |
| Benchmark  | F860; BF860        |
| ATLAS TYRE | AP-1000            |

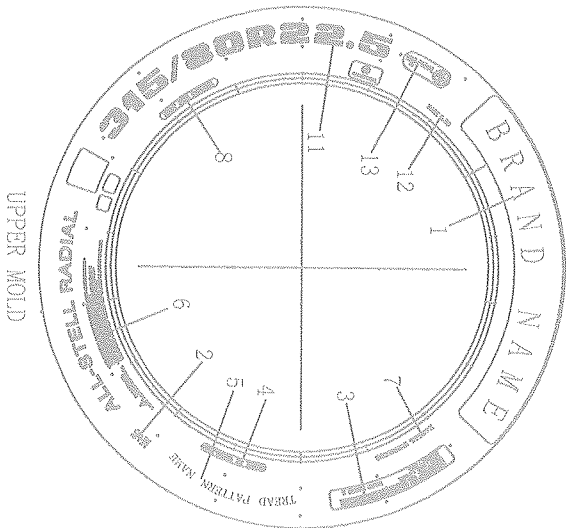

UPPER MOLD

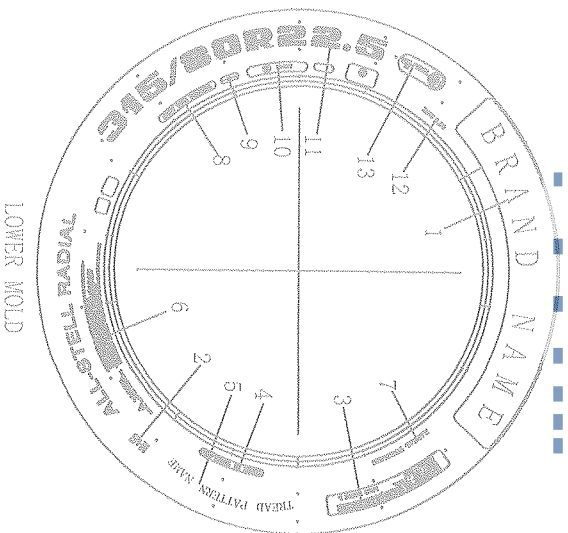

LOWER MOLD

|             |                                                                                                                                                                                       |              |      |                        |        |        |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|------------------------|--------|--------|
| 13          | 156/150 L. AT 850 kPa (150/150)                                                                                                                                                       |              |      |                        |        |        |
| 12          | RIM 9.00                                                                                                                                                                              |              |      |                        |        |        |
| 11          | 315/80R22.5                                                                                                                                                                           |              |      |                        |        |        |
| 10          |                                                                                                                                                                                       |              |      | (E9) 006066            |        |        |
| 9           |                                                                                                                                                                                       |              |      | **** (PRODUCTION DATE) |        |        |
| 8           | DOT ...                                                                                                                                                                               |              |      |                        |        |        |
| 7           | RADIAL TUBELESS                                                                                                                                                                       |              |      |                        |        |        |
| 6           | WARNING.....                                                                                                                                                                          |              |      |                        |        |        |
| 5           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                    |              |      |                        |        |        |
| 4           | MADE IN THAILAND                                                                                                                                                                      |              |      |                        |        |        |
| 3           | MAX LOAD: SINGLE 8820 LBS (4000kg) AT 123PSI (850kPa) COLD<br>MAX LOAD: DUAL 7385 LBS (3350kg) AT 123PSI (850kPa) COLD<br>TREAD: 1 STEEL+3 STEEL<br>SIDEWALL: 1 STEEL<br>LOAD RANGE L |              |      |                        |        |        |
| 2           | M+S                                                                                                                                                                                   |              |      |                        |        |        |
| 1           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                    |              |      |                        |        |        |
|             | UPPER MOLD                                                                                                                                                                            |              |      | LOWER MOLD             |        |        |
| 315/80R22.5 | 156/150 (150/150)                                                                                                                                                                     | L (M)        | TL   | 1076                   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                                                                                                            | SPEED SYMBOL | TYPE | A (mm)                 | B (mm) | C (mm) |

Approve by:



Check by:

Draft by:

3.3.10

3.3.10

3.3.10

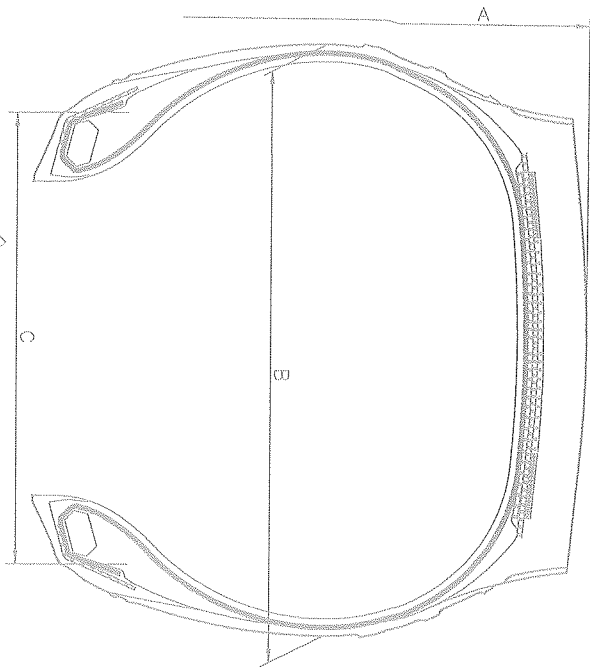

TREAD PATTERNS



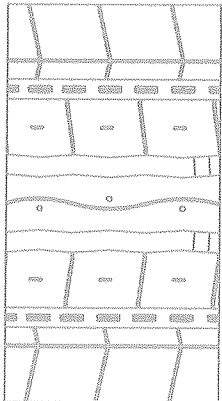


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LINGLONG   | KTS300             |
| SHANLING   | KTS300             |
| LEAO       | KTS300             |
| Infinity   | KTS300             |
| BENCHMARK  | KTS300             |
| CROSSWIND  | CWS30K             |
| TECHKING   | TASK ST            |
| BARRELY    | BJ223              |

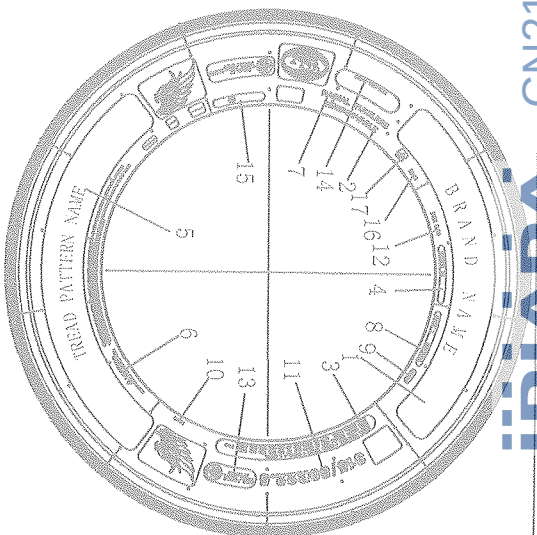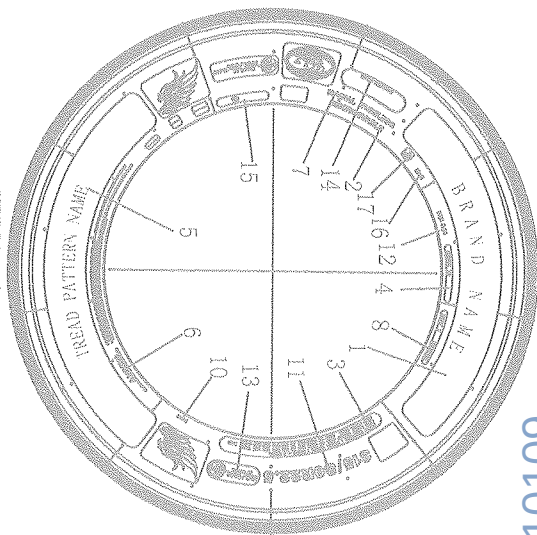

UPPER MOLD

LOWER MOLD

|    |                                                                                                                                                                                 |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 17 | ▲                                                                                                                                                                               |
| 16 | M+S                                                                                                                                                                             |
| 15 | (E9) 006066                                                                                                                                                                     |
| 14 | BRAND TYRE HERE                                                                                                                                                                 |
| 13 | 156/150 L AT 850 kPa (154/150)                                                                                                                                                  |
| 12 | RIM 9.00                                                                                                                                                                        |
| 11 | 315/80R22.5                                                                                                                                                                     |
| 10 | ***** (MOLD NUMBER)                                                                                                                                                             |
| 9  |                                                                                                                                                                                 |
| 8  | DOT ...                                                                                                                                                                         |
| 7  | RADIAL TUBELESS                                                                                                                                                                 |
| 6  | WARNING.....                                                                                                                                                                    |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                              |
| 4  | MADE IN THAILAND                                                                                                                                                                |
| 3  | PLIES: SIDEWALL 1 STEEL, TREAD 1 STEEL+3 STEEL, MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR L, MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |
| 2  | REGROOVABLE                                                                                                                                                                     |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                              |
|    | UPPER MOLD                                                                                                                                                                      |
|    | LOWER MOLD                                                                                                                                                                      |

|             |                   |              |      |        |        |        |
|-------------|-------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (154/150) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX        | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:



张艳

Check by:

张艳

Draft by:

张艳

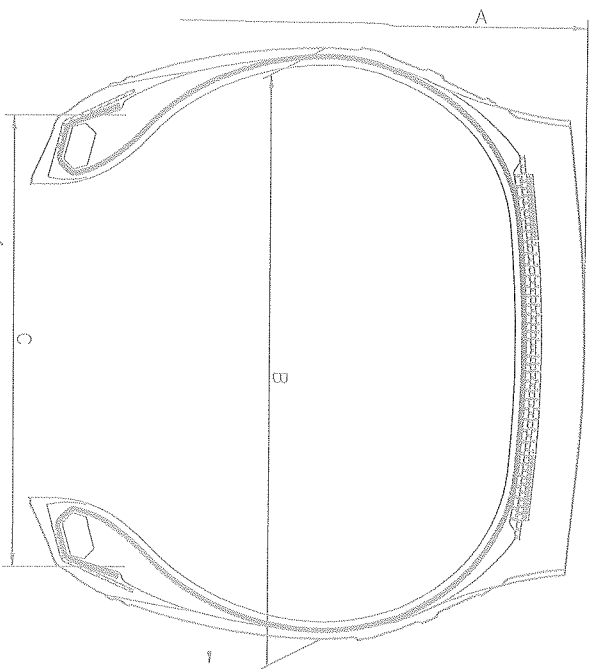

### TREAD PATTERNS



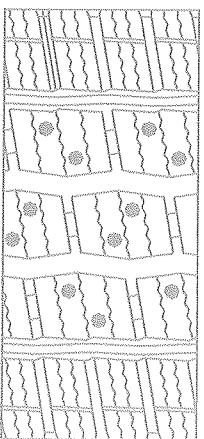


TABLE 1

| BRAND NAME  | TREAD PATTERN NAME |
|-------------|--------------------|
| LINGLONG    | KWS600             |
| SHANLING    | KWS600             |
| LEAO        | KWS600             |
| Infinity    | KWS600             |
| BENCHMARK   | KWS600             |
| CROSSWIND   | CWS60W             |
| BARKLEY     | BLW12              |
| SUMO TRENTA | DRIVUS-WS          |

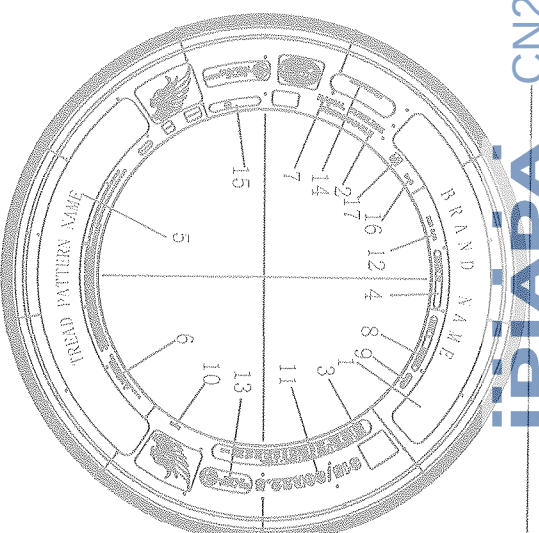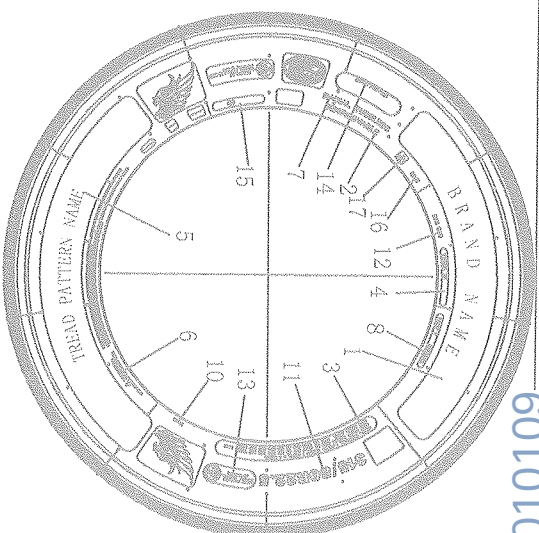

|    |                                                                                                                                                                                    |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 17 | A                                                                                                                                                                                  |
| 16 | M+S                                                                                                                                                                                |
| 15 | E9 006066                                                                                                                                                                          |
| 14 | BRAND TYRE HERE                                                                                                                                                                    |
| 13 | 156/150 L AT 850 kPa (154/150)                                                                                                                                                     |
| 12 | RIM 9. 00                                                                                                                                                                          |
| 11 | 315/80R22. 5                                                                                                                                                                       |
| 10 | *** (MOLD NUMBER)                                                                                                                                                                  |
| 9  | **** (PRODUCTION DATE)                                                                                                                                                             |
| 8  | DOT ...                                                                                                                                                                            |
| 7  | RADIAL TUBELESS                                                                                                                                                                    |
| 6  | WARNING.....                                                                                                                                                                       |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                 |
| 4  | MADE IN THAILAND                                                                                                                                                                   |
| 3  | PIRES: SIDEWALL 1 STEEL TREAD 1 STEEL+3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |
| 2  | REGROOVABLE                                                                                                                                                                        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                 |
|    | UPPER MOLD                                                                                                                                                                         |
|    | LOWER MOLD                                                                                                                                                                         |
|    | 315/80R22. 5                                                                                                                                                                       |
|    | 156/150 (154/150)                                                                                                                                                                  |
|    | L (M)                                                                                                                                                                              |
|    | TL                                                                                                                                                                                 |
|    | 1076                                                                                                                                                                               |
|    | 312                                                                                                                                                                                |
|    | 228. 5                                                                                                                                                                             |
|    | TYRE SIZE                                                                                                                                                                          |
|    | LOAD INDEX                                                                                                                                                                         |
|    | SPEED SYMBOL                                                                                                                                                                       |
|    | TYPE                                                                                                                                                                               |
|    | A (mm)                                                                                                                                                                             |
|    | B (mm)                                                                                                                                                                             |
|    | C (mm)                                                                                                                                                                             |

Approve by:



Check by:

Draft by:

60101012N3

YAYI



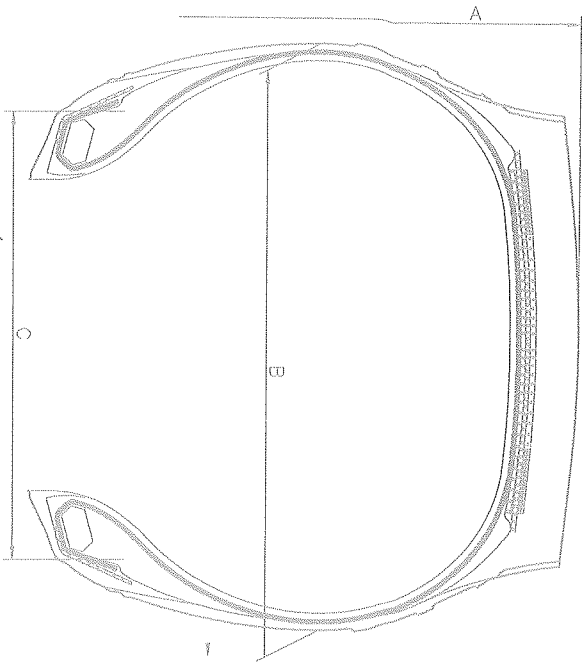

TREAD PATTERNS



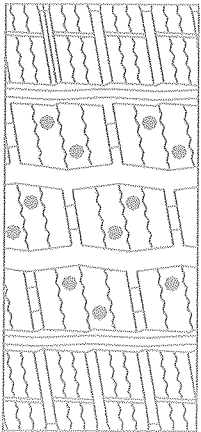


TABLE 1

|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| GREEN MAX  | CWS828             |

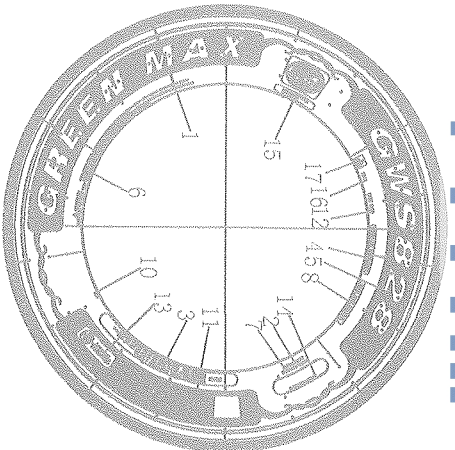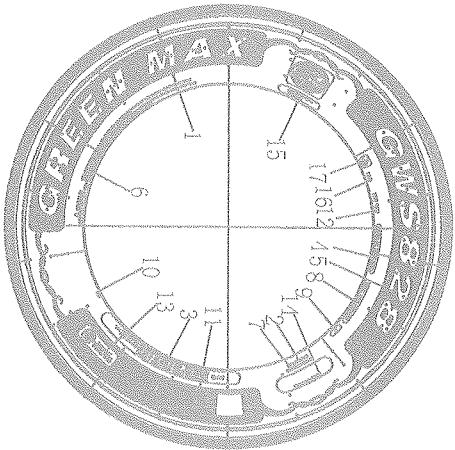

UPPER MOLD

LOWER MOLD

|            |                                                                                                                                                                                           |            |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 17         | ▲                                                                                                                                                                                         |            |
| 16         | M+S                                                                                                                                                                                       |            |
| 15         | E9 006066                                                                                                                                                                                 |            |
| 14         | BRAND TYRE HERE                                                                                                                                                                           |            |
| 13         | 156/150 L AT 850 kPa 150 80                                                                                                                                                               |            |
| 12         | RIM 9.00                                                                                                                                                                                  |            |
| 11         | 315/80R22.5                                                                                                                                                                               |            |
| 10         | *** (MOLD NUMBER)                                                                                                                                                                         |            |
| 9          | **** (PRODUCTION DATE)                                                                                                                                                                    |            |
| 8          | DOT ...                                                                                                                                                                                   |            |
| 7          | RADIAL TUBELESS                                                                                                                                                                           |            |
| 6          | WARNING.....                                                                                                                                                                              |            |
| 5          | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |            |
| 4          | MADE IN THAILAND                                                                                                                                                                          |            |
| 3          | 20PR PLYS; SIDEWALL 1 STEEL TREAD 1 STEEL +3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L.<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |            |
| 2          | REGROOVABLE                                                                                                                                                                               |            |
| 1          | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |            |
| UPPER MOLD |                                                                                                                                                                                           | LOWER MOLD |

|             |                |              |      |        |        |        |
|-------------|----------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 150 80 | L M          | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX     | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:



Handwritten signature

Check by:

Handwritten signature

Draft by:

Handwritten signature

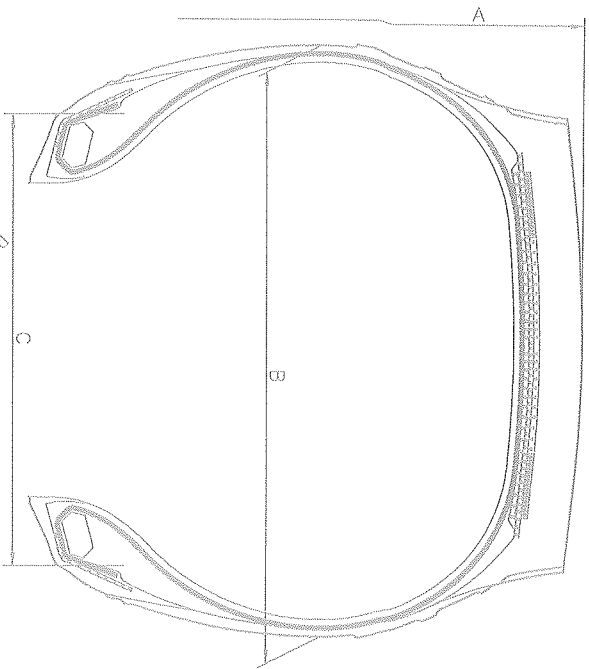

TREAD PATTERNS



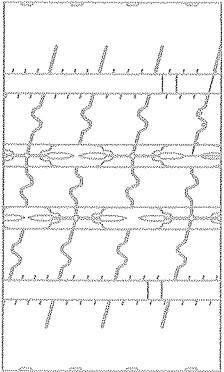


TABLE 1

| BRAND NAME   | TREAD PATTERN NAME |
|--------------|--------------------|
| LINGLONG     | ETS100             |
| SHANLING     | ETS100             |
| LEAO         | ETS100             |
| Infinity     | ETS100             |
| BENCHMARK    | ETS100             |
| CROSSWIND    | CWS10E             |
| BARLEY       | BL221              |
| SCMO FIRENZA | DRIVUS-S           |

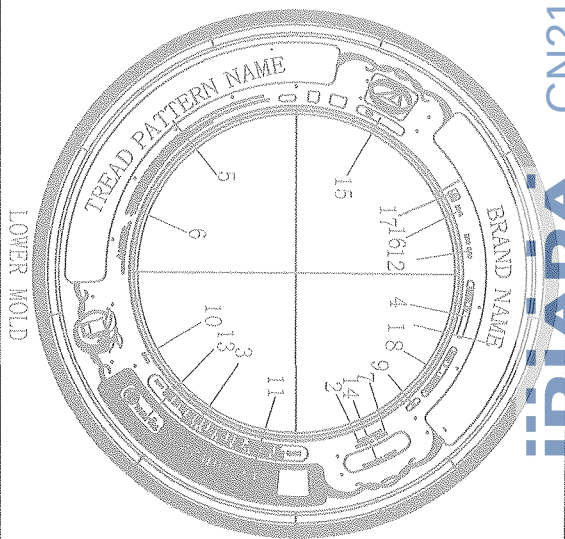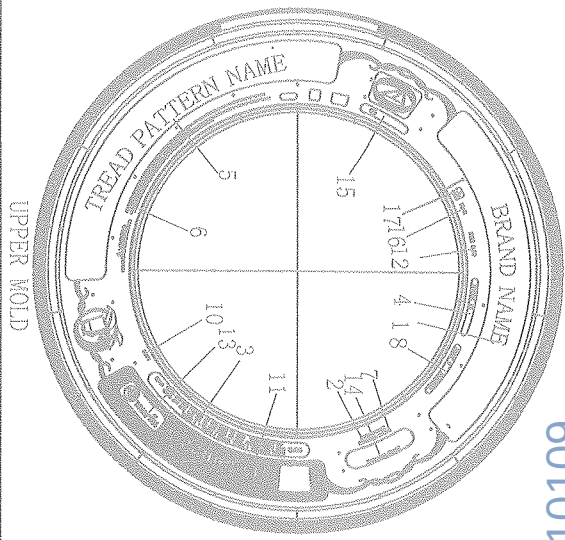

|             |                                                                                                                                                                                           |              |      |        |        |        |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|--------|--------|--------|
| 17          | ▲                                                                                                                                                                                         |              |      |        |        |        |
| 16          | M+S                                                                                                                                                                                       |              |      |        |        |        |
| 15          | (E9) 006066                                                                                                                                                                               |              |      |        |        |        |
| 14          | BRAND TYRE HERE                                                                                                                                                                           |              |      |        |        |        |
| 13          | 156/150L AT 850 kPa (154/150)                                                                                                                                                             |              |      |        |        |        |
| 12          | RIM 9.00                                                                                                                                                                                  |              |      |        |        |        |
| 11          | 315/80R22.5                                                                                                                                                                               |              |      |        |        |        |
| 10          | ***** (MOLD NUMBER)                                                                                                                                                                       |              |      |        |        |        |
| 9           | ***** (PRODUCTION DATE)                                                                                                                                                                   |              |      |        |        |        |
| 8           | DOT ...                                                                                                                                                                                   |              |      |        |        |        |
| 7           | RADIAL TUBELESS                                                                                                                                                                           |              |      |        |        |        |
| 6           | WARNING.....                                                                                                                                                                              |              |      |        |        |        |
| 5           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |              |      |        |        |        |
| 4           | MADE IN THAILAND                                                                                                                                                                          |              |      |        |        |        |
| 3           | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL+3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R. L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |              |      |        |        |        |
| 2           | REGROOVABLE                                                                                                                                                                               |              |      |        |        |        |
| 1           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |              |      |        |        |        |
|             | UPPER MOLD                                                                                                                                                                                | LOWER MOLD   |      |        |        |        |
| 315/80R22.5 | 156/150 (154/150)                                                                                                                                                                         | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                                                                                                                | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:


Check by:

Draft by:

张


张

张



| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
|            |                    |

| BRAND NAME   | TREAD PATTERN NAME |
|--------------|--------------------|
| LINGLONG     | ETD100             |
| SHANLING     | ETD100             |
| LEAO         | ETD100             |
| Infinity     | ETD100             |
| BENCHMARK    | ETD100             |
| CROSSWIND    | CWD10E             |
| BARBLEY      | BL831              |
| SIMO F1RENZA | DRIVS-D            |
| GREEN MAX    | GRD802             |


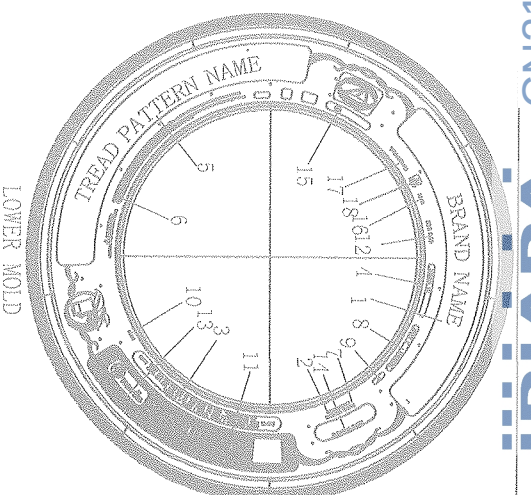


|    |                                                                                                                                                                                           |                         |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| 18 |                                                                                                          |                         |
| 17 | TRACTION                                                                                                                                                                                  |                         |
| 16 | M+S                                                                                                                                                                                       |                         |
| 15 | E9 006066                                                                                                                                                                                 |                         |
| 14 | BRAND TYRE HERE                                                                                                                                                                           |                         |
| 13 | 156/150L AT 850 kPa                                                                                    |                         |
| 12 | RIM 9.00                                                                                                                                                                                  |                         |
| 11 | 315/80R22.5                                                                                                                                                                               |                         |
| 10 | ***** (MOLD NUMBER)                                                                                                                                                                       |                         |
| 9  |                                                                                                                                                                                           | ***** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                                   |                         |
| 7  | RADIAL TUBELESS                                                                                                                                                                           |                         |
| 6  | WARNING.....                                                                                                                                                                              |                         |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |                         |
| 4  | MADE IN THAILAND                                                                                                                                                                          |                         |
| 3  | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL 13 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L<br>MAX LOAD: DUAL 3550 kg (7855 lbs) AT 850 kPa (123 psi) COLD |                         |
| 2  | REGROOVABLE                                                                                                                                                                               |                         |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |                         |
|    | UPPER MOLD                                                                                                                                                                                | LOWER MOLD              |

|             |                                       |                              |      |        |        |        |
|-------------|---------------------------------------|------------------------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 $\left(\frac{154}{37}\right)$ | L $\left(\frac{M}{N}\right)$ | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                            | SPEED SYMBOL                 | TYPE | A (mm) | B (mm) | C (mm) |

Draft by:



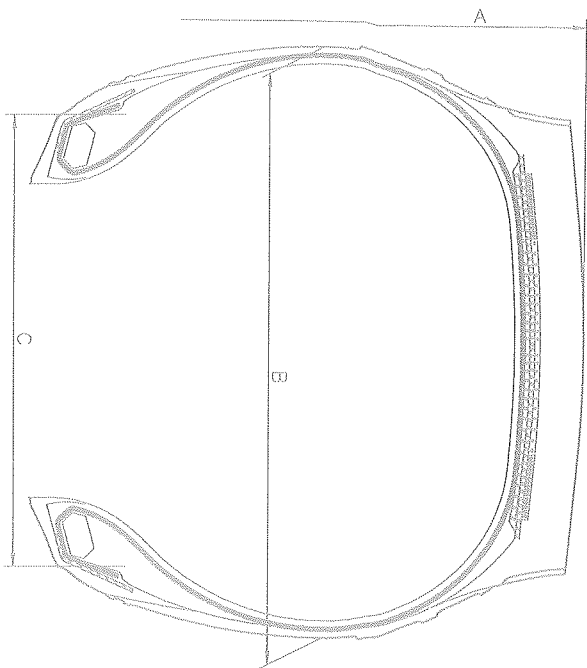

TREAD PATTERNS






TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LINGLONG   | KTD300             |
| SHANLING   | KTD300             |
| LEAO       | KTD300             |
| Infinity   | KTD300             |
| BENCHMARK  | KTD300             |
| CROSSWIND  | CWD30K             |
| BARKLEY    | BL833              |
| TECHKING   | TASK DH            |

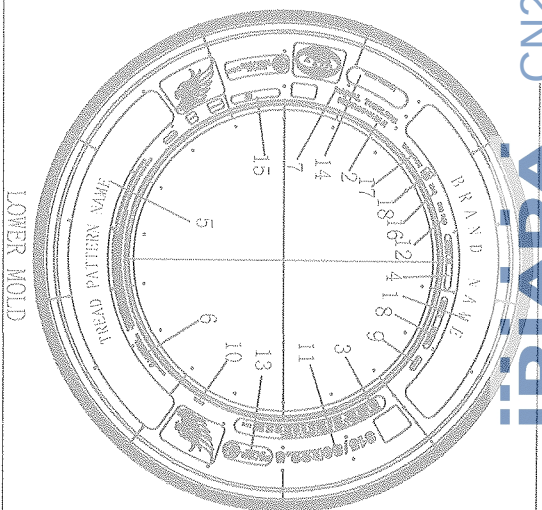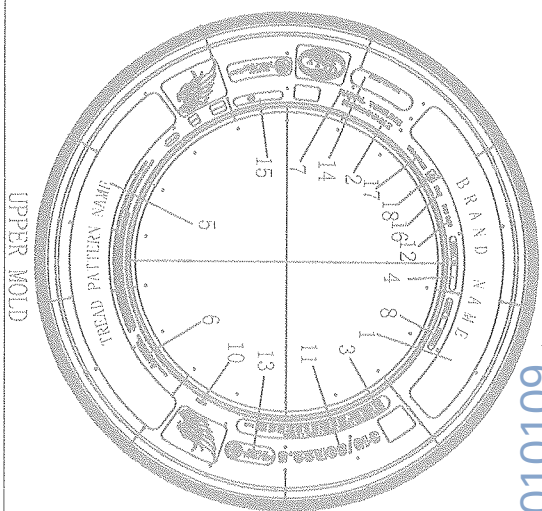



|    |                                                                   |            |              |      |        |
|----|-------------------------------------------------------------------|------------|--------------|------|--------|
| 18 | TRACTION                                                          |            |              |      |        |
| 17 | M+S                                                               |            |              |      |        |
| 16 | 006066                                                            |            |              |      |        |
| 15 | BRAND TYRE HERE                                                   |            |              |      |        |
| 14 | 156/150L AT 850 kPa                                               |            |              |      |        |
| 13 | RIM 9.00                                                          |            |              |      |        |
| 12 | 315/80R22.5                                                       |            |              |      |        |
| 11 | *** (MOLD NUMBER)                                                 |            |              |      |        |
| 10 | DOT ...                                                           |            |              |      |        |
| 9  | RADIAL TUBELESS                                                   |            |              |      |        |
| 8  | WARNING.....                                                      |            |              |      |        |
| 7  | PLEASE SEE THE TABLE 1 ON THE LEFT                                |            |              |      |        |
| 6  | MADE IN THAILAND                                                  |            |              |      |        |
| 5  | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL 43 STEEL                    |            |              |      |        |
| 4  | MAX LOAD SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR L |            |              |      |        |
| 3  | MAX LOAD DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD        |            |              |      |        |
| 2  | REGROOVABLE                                                       |            |              |      |        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                |            |              |      |        |
|    | UPPER MOLD                                                        |            |              |      |        |
|    | LOWER MOLD                                                        |            |              |      |        |
|    | 315/80R22.5                                                       | 156/150    | L            | TL   | 1076   |
|    | TYRE SIZE                                                         | LOAD INDEX | SPEED SYMBOL | TYPE | A (mm) |
|    |                                                                   |            |              |      | B (mm) |
|    |                                                                   |            |              |      | C (mm) |

Approve by:

Check by:

Draft by:



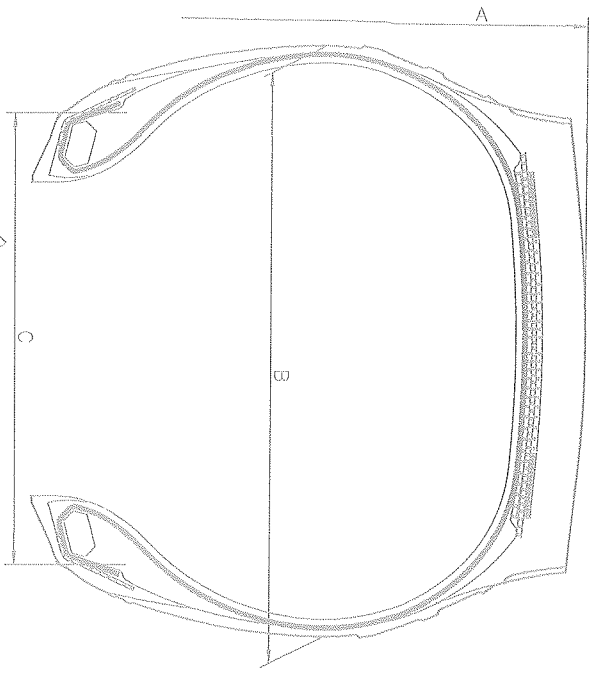

TREAD  
PATTERNS






TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| GREEN MAX  | GRD806             |

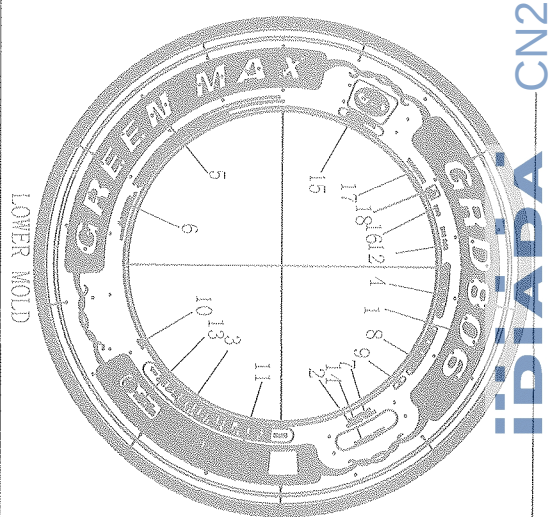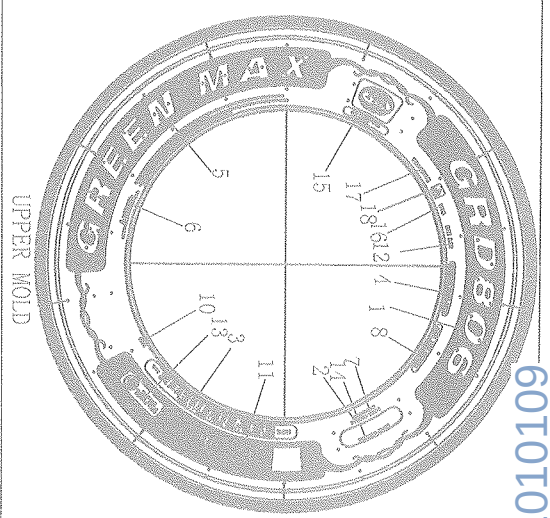



|    |                                                                                                                                                                                                 |                        |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 18 |                                                                                                              |                        |
| 17 | TRACTION                                                                                                                                                                                        |                        |
| 16 | M+S                                                                                                                                                                                             |                        |
| 15 | (E9) 006066                                                                                                                                                                                     |                        |
| 14 | BRAND TYRE HERE                                                                                                                                                                                 |                        |
| 13 | 156/150L AT 850 kPa                                                                                          |                        |
| 12 | RIM 9.00                                                                                                                                                                                        |                        |
| 11 | 315/80R22.5                                                                                                                                                                                     |                        |
| 10 | **** (MOLD NUMBER)                                                                                                                                                                              |                        |
| 9  |                                                                                                                                                                                                 | **** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                                         |                        |
| 7  | RADIAL TUBELESS                                                                                                                                                                                 |                        |
| 6  | WARNING.....                                                                                                                                                                                    |                        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                              |                        |
| 4  | MADE IN THAILAND                                                                                                                                                                                |                        |
| 3  | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL TREAD 3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD I.R. L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                        |
| 2  | REGROOVABLE                                                                                                                                                                                     |                        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                              |                        |
|    | UPPER MOLD                                                                                                                                                                                      | LOWER MOLD             |

|             |                                                                                             |                                                                                        |      |        |        |        |
|-------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150  | 1.  | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                  | SPEED SYMBOL                                                                           | TYPE | A (mm) | B (mm) | C (mm) |

Approve by: 

Check by: 

Draft by: 

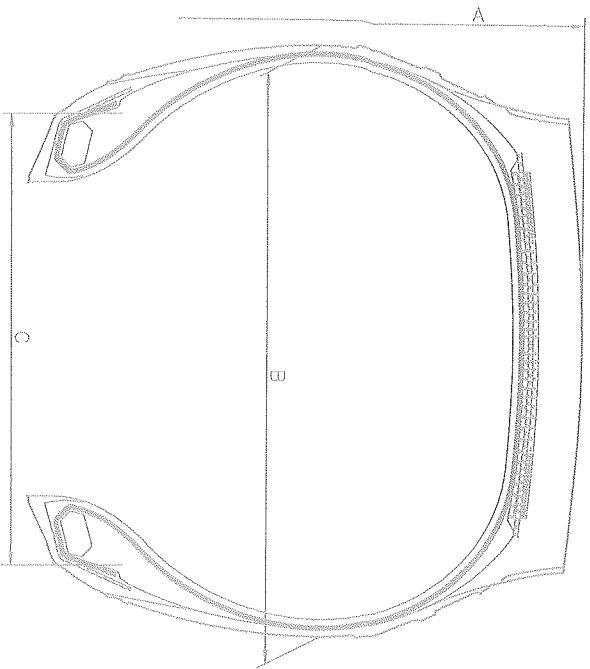

TREAD PATTERNS



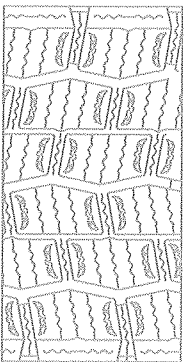


TABLE 1

| BRAND NAME   | TREAD PATTERN NAME |
|--------------|--------------------|
| LINGLONG     | KWD600             |
| SHANLING     | KWD600             |
| LEAO         | KWD600             |
| Infinity     | KWD600             |
| BENCHMARK    | KWD600             |
| CROSSWIND    | CWD60W             |
| BARBLEY      | BLW18              |
| SUMO F1RENZA | DRIVUS-WD          |

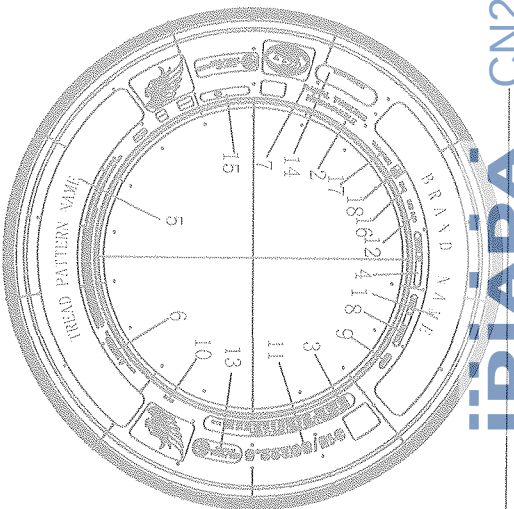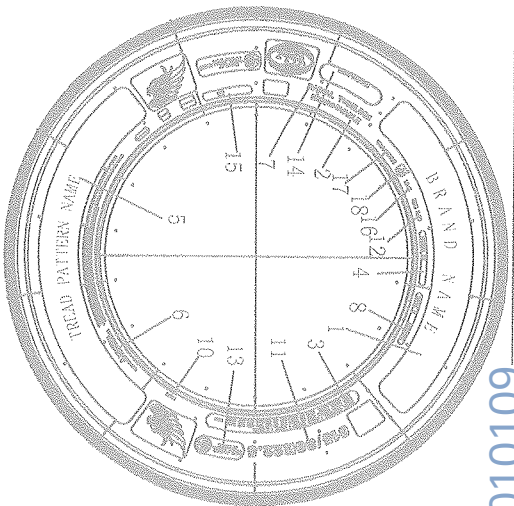

UPPER MOLD


LOWER MOLD

|             |                                                                                                                                                                                     |                        |      |        |        |        |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|--------|--------|--------|
| 18          |                                                                                                                                                                                     |                        |      |        |        |        |
| 17          | TRACTION                                                                                                                                                                            |                        |      |        |        |        |
| 16          | M+S                                                                                                                                                                                 |                        |      |        |        |        |
| 15          | (E9) 006066                                                                                                                                                                         |                        |      |        |        |        |
| 14          | BRAND TYRE HERE                                                                                                                                                                     |                        |      |        |        |        |
| 13          | 156/150L AT 850 kPa (154/150)                                                                                                                                                       |                        |      |        |        |        |
| 12          | RIM 9.00                                                                                                                                                                            |                        |      |        |        |        |
| 11          | 315/80R22.5                                                                                                                                                                         |                        |      |        |        |        |
| 10          | **** (MOLD NUMBER)                                                                                                                                                                  |                        |      |        |        |        |
| 9           |                                                                                                                                                                                     | **** (PRODUCTION DATE) |      |        |        |        |
| 8           | DOT ...                                                                                                                                                                             |                        |      |        |        |        |
| 7           | RADIAL TUBELESS                                                                                                                                                                     |                        |      |        |        |        |
| 6           | WARNING.....                                                                                                                                                                        |                        |      |        |        |        |
| 5           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |                        |      |        |        |        |
| 4           | MADE IN THAILAND                                                                                                                                                                    |                        |      |        |        |        |
| 3           | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL 3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD U.R.L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                        |      |        |        |        |
| 2           | REGROOVABLE                                                                                                                                                                         |                        |      |        |        |        |
| 1           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |                        |      |        |        |        |
|             | UPPER MOLD                                                                                                                                                                          | LOWER MOLD             |      |        |        |        |
| 315/80R22.5 | 156/150 (154/150)                                                                                                                                                                   | L (M)                  | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                                                                                                          | SPEED SYMBOL           | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:


Check by:

Draft by:



|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| GREEN MAX  | CWD838             |

|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| GREEN MAX  | CWD838             |

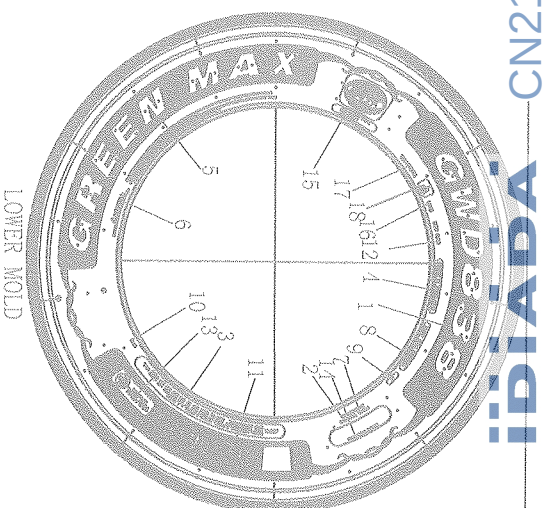

|    |                                                                                                                                                                                          |                       |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| 18 |                                                                                                         |                       |
| 17 | TRACTION                                                                                                                                                                                 |                       |
| 16 | M+S                                                                                                                                                                                      |                       |
| 15 | E9 006066                                                                                                                                                                                |                       |
| 14 | BRAND TYRE HERE                                                                                                                                                                          |                       |
| 13 | 156/150L AT 850 kPa $\left(\frac{123}{150}\right)$                                                                                                                                       |                       |
| 12 | RIM 9.00                                                                                                                                                                                 |                       |
| 11 | 315/80R22.5                                                                                                                                                                              |                       |
| 10 | *** (MOLD NUMBER)                                                                                                                                                                        |                       |
| 9  |                                                                                                                                                                                          | *** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                                  |                       |
| 7  | RADIAL TUBELESS                                                                                                                                                                          |                       |
| 6  | WARNING.....                                                                                                                                                                             |                       |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                       |                       |
| 4  | MADE IN THAILAND                                                                                                                                                                         |                       |
| 3  | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL+3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                       |
| 2  | REGROOVABLE                                                                                                                                                                              |                       |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                       |                       |
|    | UPPER MOLD                                                                                                                                                                               | LOWER MOLD            |



|             |                                           |                  |      |        |        |        |
|-------------|-------------------------------------------|------------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 <sup>(154)</sup> <sub>(150)</sub> | L <sup>(M)</sup> | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                | SPEED SYMBOL     | TYPE | A (mm) | B (mm) | C (mm) |

5-2

张艳

Prkin




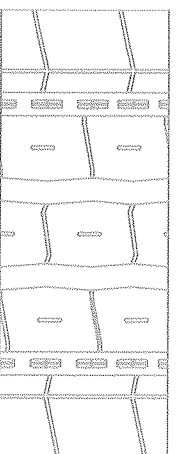

# READ PATTERNS


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| FULMILE    | T-HYBRID SO1       |

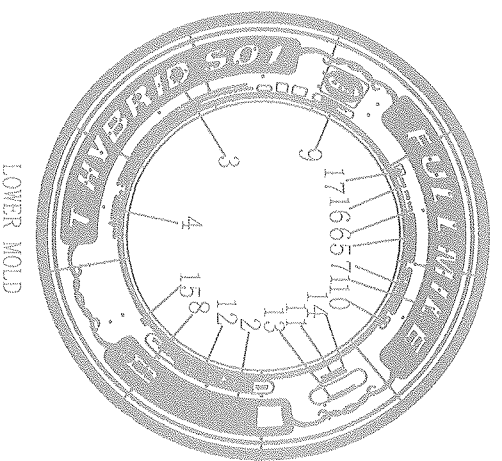

**FOR**

**RENT**

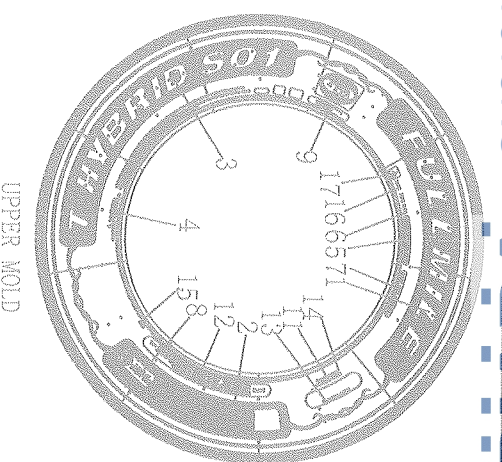

DEVELOPMENT



|    |                                                                                                                                                                                            |            |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 17 |                                                                                                           |            |
| 16 | M+S                                                                                                                                                                                        |            |
| 15 | ***** (MOLD NUMBER)                                                                                                                                                                        |            |
| 14 | RADIAL TUBELESS                                                                                                                                                                            |            |
| 13 | BRAND TYRE HERE                                                                                                                                                                            |            |
| 12 | 20PR PILES, SIDEWALL 1 STEEL TREAD 1 STEEL + 3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |            |
| 11 | REGROOVABLE                                                                                                                                                                                |            |
| 10 | ***** (PRODUCTION DATE)                                                                                                                                                                    |            |
| 9  | E9 006066                                                                                                                                                                                  |            |
| 8  | 156/150L AT 850 kPa $\left(\frac{124}{150}\right)$ M                                                                                                                                       |            |
| 7  | DOT...                                                                                                                                                                                     |            |
| 6  | RIM 9.00                                                                                                                                                                                   |            |
| 5  | MADE IN THAILAND                                                                                                                                                                           |            |
| 4  | WARNING...                                                                                                                                                                                 |            |
| 3  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |            |
| 2  | 315/80R22.5                                                                                                                                                                                |            |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         | UPPER MOLD |
|    | LOWER MOLD                                                                                                                                                                                 |            |

|             |                                       |                       |      |        |        |        |
|-------------|---------------------------------------|-----------------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 $\left(\frac{153}{50}\right)$ | L $\left(\frac{M}{S}$ | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                            | SPEED SYMBOL          | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Check by:

De la

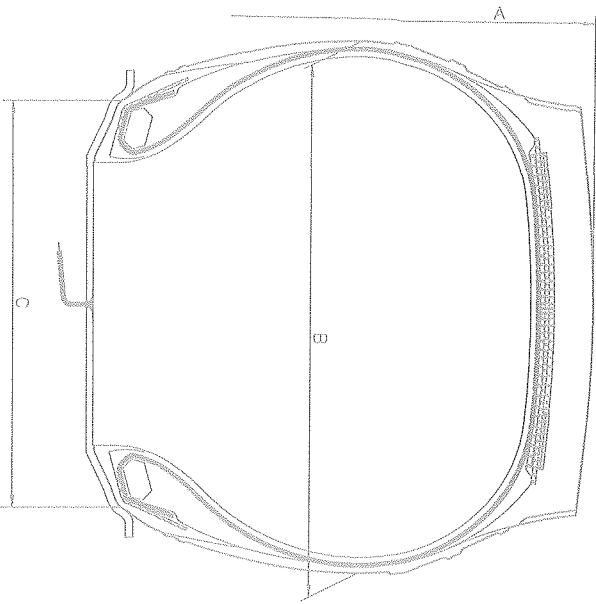

TREAD PATTERNS



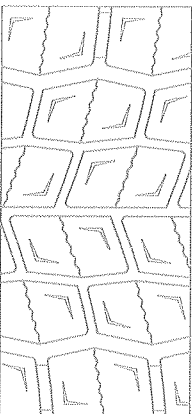


TABLE 1

|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| FULMILE    | T-HYBRID DOI       |

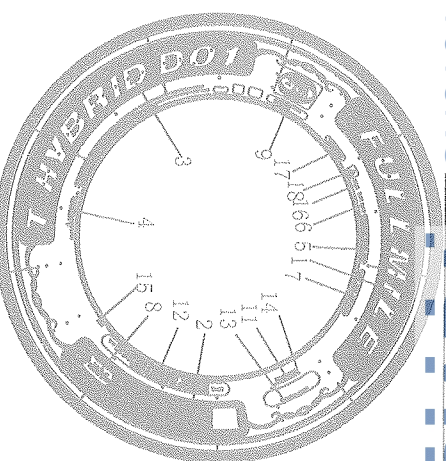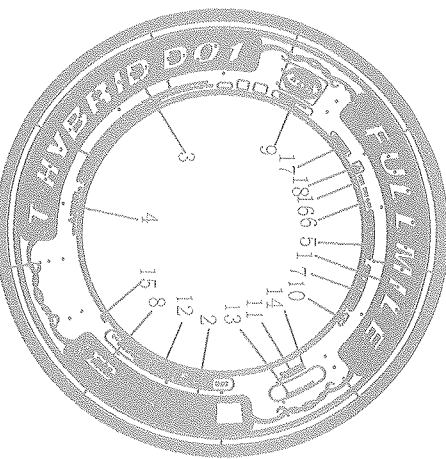

LOWER MOLD

UPPER MOLD

|            |                                                                                                                                                                                            |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18         | ▲                                                                                                                                                                                          |
| 17         | TRACTION                                                                                                                                                                                   |
| 16         | M+S                                                                                                                                                                                        |
| 15         | *** (MOLD NUMBER)                                                                                                                                                                          |
| 14         | RADIAL TUBELESS                                                                                                                                                                            |
| 13         | BRAND TYRE HERE                                                                                                                                                                            |
| 12         | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL + 3 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |
| 11         | REGROOVABLE                                                                                                                                                                                |
| 10         | *** (PRODUCTION DATE)                                                                                                                                                                      |
| 9          | Ⓔ9 006066                                                                                                                                                                                  |
| 8          | 156/150L AT 850 kPa <u>154M</u><br><u>150</u>                                                                                                                                              |
| 7          | DOT...                                                                                                                                                                                     |
| 6          | RIM 9.00                                                                                                                                                                                   |
| 5          | MADE IN THAILAND                                                                                                                                                                           |
| 4          | WARNING...                                                                                                                                                                                 |
| 3          | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |
| 2          | 315/80R22.5                                                                                                                                                                                |
| 1          | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |
| LOWER MOLD |                                                                                                                                                                                            |
| UPPER MOLD |                                                                                                                                                                                            |

|             |                     |              |      |        |        |        |
|-------------|---------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 <u>154M</u> | L <u>M</u>   | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX          | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:



张艳

Check by:

张艳

Draft by:

张艳

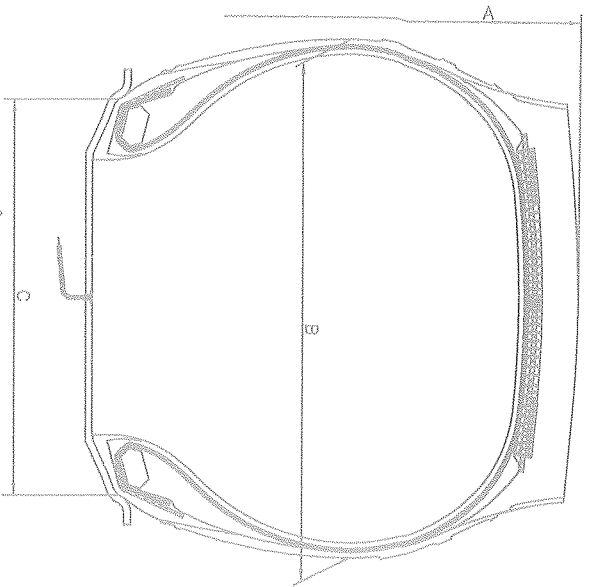

TREAD  
PATTERNS



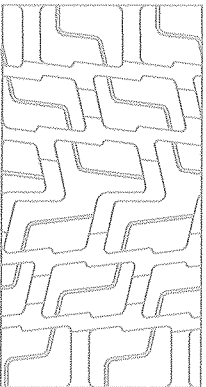


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LEAO       | D920               |

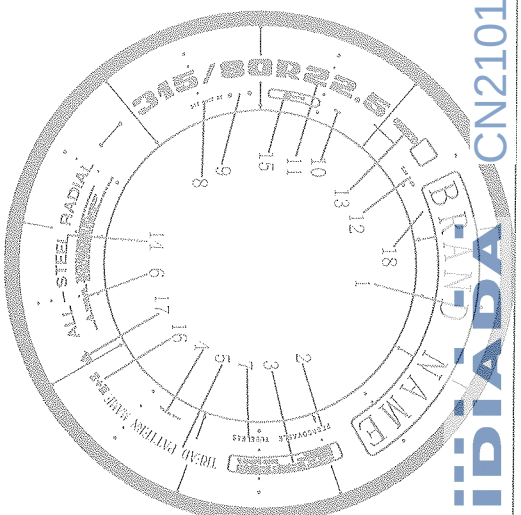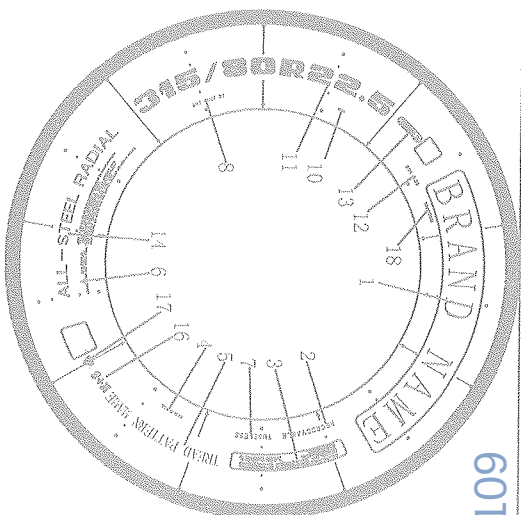

60101012N3

ADAYI


|    |                                                                                                                                                                                     |                |              |      |        |                       |  |        |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------|------|--------|-----------------------|--|--------|
| 18 | TRACTION                                                                                                                                                                            |                |              |      |        |                       |  |        |
| 17 |                                                                                                    |                |              |      |        |                       |  |        |
| 16 | M+S                                                                                                                                                                                 |                |              |      |        |                       |  |        |
| 15 |                                                                                                                                                                                     |                |              |      |        | (E9) 006066           |  |        |
| 14 | ALL-STEEL RADIAL                                                                                                                                                                    |                |              |      |        |                       |  |        |
| 13 | 156/150 L (154M)<br>850 kPa                                                                                                                                                         |                |              |      |        |                       |  |        |
| 12 | RIM 9.00                                                                                                                                                                            |                |              |      |        |                       |  |        |
| 11 | 315/80R22.5                                                                                                                                                                         |                |              |      |        |                       |  |        |
| 10 | **** (MOLD NUMBER)                                                                                                                                                                  |                |              |      |        |                       |  |        |
| 9  |                                                                                                                                                                                     |                |              |      |        | *** (PRODUCTION DATE) |  |        |
| 8  | DOT ....                                                                                                                                                                            |                |              |      |        |                       |  |        |
| 7  | TUBELESS                                                                                                                                                                            |                |              |      |        |                       |  |        |
| 6  | WARNING.....                                                                                                                                                                        |                |              |      |        |                       |  |        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |                |              |      |        |                       |  |        |
| 4  | MADE IN THAILAND                                                                                                                                                                    |                |              |      |        |                       |  |        |
| 3  | MAX LOAD: SINGLE 8820LBS (4000kg) AT 123PSI (850kPa) COLD<br>MAX LOAD: DUAL 7385LBS (3350kg) AT 123PSI (850kPa) COLD<br>TREAD: 1 STEEL+3 STEEL<br>SIDEWALL: 1 STEEL<br>LOAD RANGE L |                |              |      |        |                       |  |        |
| 2  | REGROOVABLE                                                                                                                                                                         |                |              |      |        |                       |  |        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |                |              |      |        |                       |  |        |
|    | UPPER MOLD                                                                                                                                                                          |                |              |      |        | LOWER MOLD            |  |        |
|    | 315/80R22.5                                                                                                                                                                         | 156/150 (154M) | L (M)        | TL   | 1076   | 312                   |  | 228.5  |
|    | TYRE SIZE                                                                                                                                                                           | LOAD INDEX     | SPEED SYMBOL | TYPE | A (mm) | B (mm)                |  | C (mm) |

Approve by:

Check by:

Draft by:



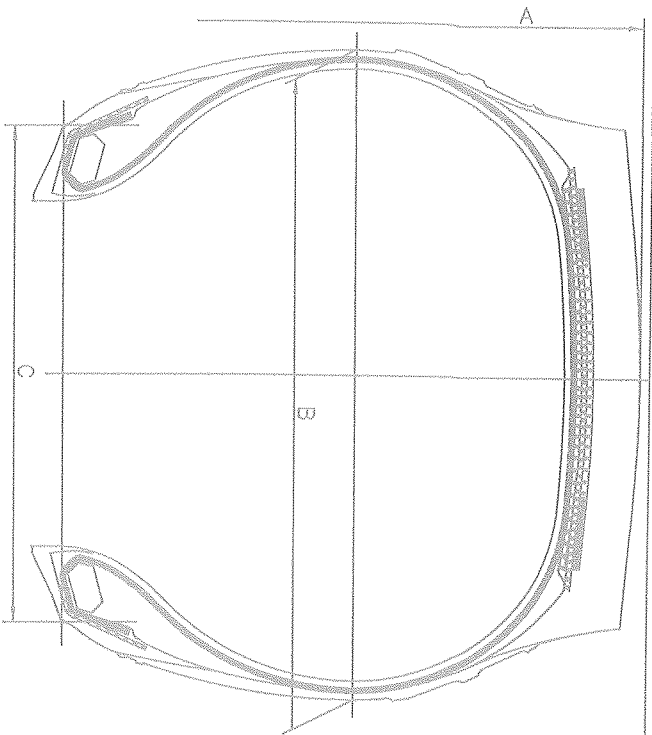

TREAD PATTERNS



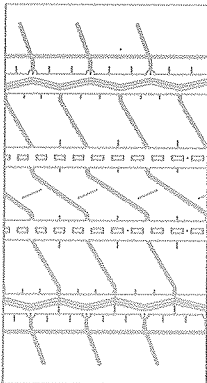


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| AUFINE     | AE1.2              |
| MAXELL     | MA1.2              |
| ANEMOI     | AE1.2              |

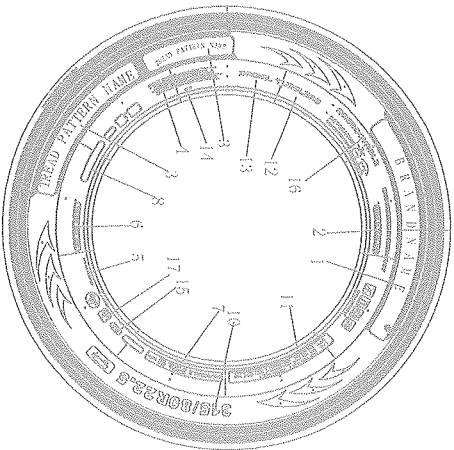

UPPER MOLD

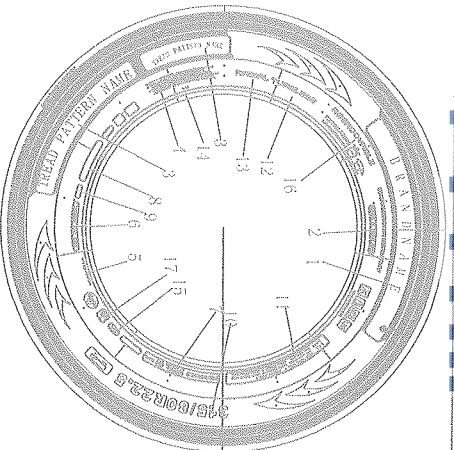

LOWER MOLD

|    |                                                                                                                                                                               |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 17 | A                                                                                                                                                                             |
| 16 | REGROOVABLE                                                                                                                                                                   |
| 15 | M+S                                                                                                                                                                           |
| 14 | *** (MOLD NUMBER)                                                                                                                                                             |
| 13 | RADIAL                                                                                                                                                                        |
| 12 | TUBELESS                                                                                                                                                                      |
| 11 | LR.L PLIES: TREAD STEEL 4 SIDEWALL STEEL 1<br>20PR MAX LOAD: SINGLE 4000 kg (8820lbs) AT 850 kPa (123 psi) COLD<br>MAX LOAD: DUAL 3350 kg (7390lbs) AT 850 kPa (123 psi) COLD |
| 10 | 315/80R22.5                                                                                                                                                                   |
| 9  | **** (PRODUCTION DATE)                                                                                                                                                        |
| 8  | E9 006066                                                                                                                                                                     |
| 7  | 315/80R22.5 156/150L AT 850 kPa 154M 150 20PR                                                                                                                                 |
| 6  | DOT...                                                                                                                                                                        |
| 5  | STANDARD RIM 9.00                                                                                                                                                             |
| 4  | WARNING....                                                                                                                                                                   |
| 3  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                            |
| 2  | MADE IN THAILAND                                                                                                                                                              |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                            |
|    | UPPER MOLD                                                                                                                                                                    |
|    | LOWER MOLD                                                                                                                                                                    |

|             |                 |              |      |        |        |        |
|-------------|-----------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 150 150 | L M 150      | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX      | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:



Check by:

Draft by:

张艳

张艳

B. H. H. H.

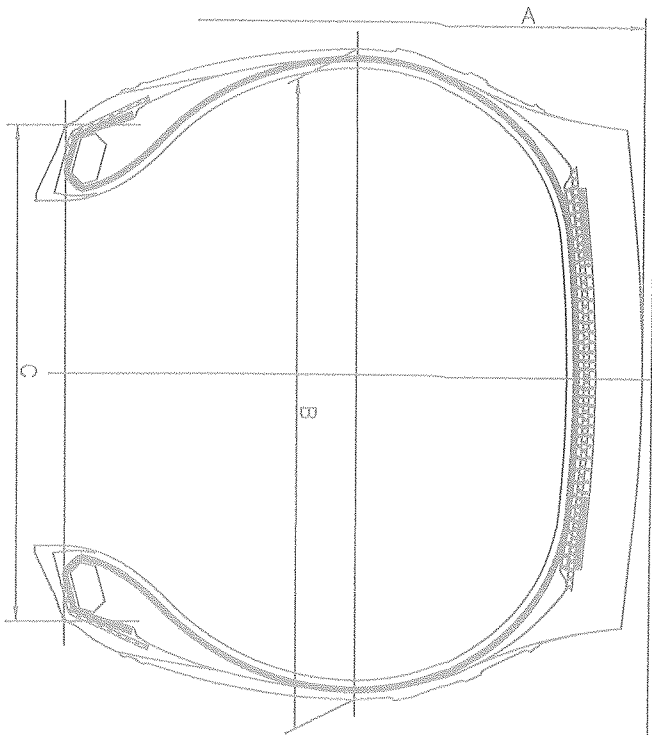

TREAD PATTERNS



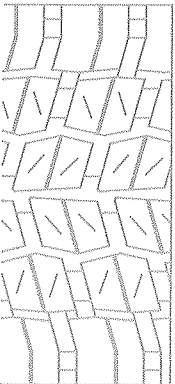


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| AUFINE     | ADR3               |
| MAXELL     | MER3               |
| ANEMOI     | ADR3               |

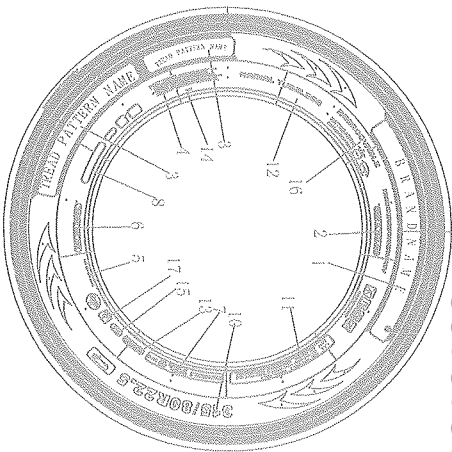

UPPER MOLD

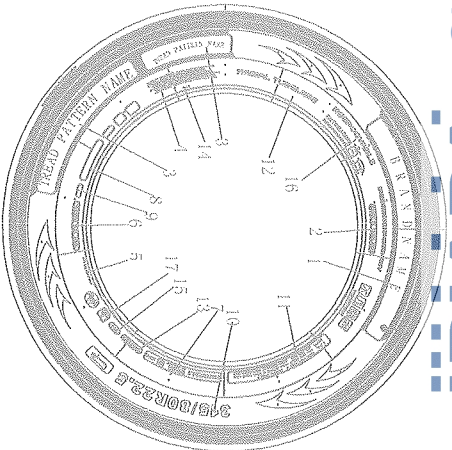

LOWER MOLD

|    |                                                                                                                                                                               |                        |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 17 | ▲                                                                                                                                                                             | UPPER MOLD             |
| 16 | REGROOVABLE                                                                                                                                                                   |                        |
| 15 | M+S                                                                                                                                                                           |                        |
| 14 | **** (MOLD NUMBER)                                                                                                                                                            |                        |
| 13 | TRACTION                                                                                                                                                                      |                        |
| 12 | RADIAL TUBELESS                                                                                                                                                               |                        |
| 11 | LR.L PILES: TREAD STEEL 4 SIDEWALL STEEL 1<br>20PR MAX LOAD: SINGLE 4000 kg (8820lbs) AT 850 kPa (123 psi) COLD<br>MAX LOAD: DUAL 3350 kg (7390lbs) AT 850 kPa (123 psi) COLD |                        |
| 10 | 315/80R22.5                                                                                                                                                                   |                        |
| 9  |                                                                                                                                                                               | **** (PRODUCTION DATE) |
| 8  | E9 006066                                                                                                                                                                     |                        |
| 7  | 315/80R22.5 156/150L AT 850 kPa 154M 20PR 150                                                                                                                                 |                        |
| 6  | DOT...                                                                                                                                                                        |                        |
| 5  | STANDARD RIM 9.00                                                                                                                                                             |                        |
| 4  | WARNING.....                                                                                                                                                                  |                        |
| 3  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                            |                        |
| 2  | MADE IN THAILAND                                                                                                                                                              |                        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                            |                        |
|    | UPPER MOLD                                                                                                                                                                    | LOWER MOLD             |

|             |             |              |      |        |        |        |
|-------------|-------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 150 | L M 150      | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX  | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:


Check by:

Draft by:

张艳

张艳

张艳

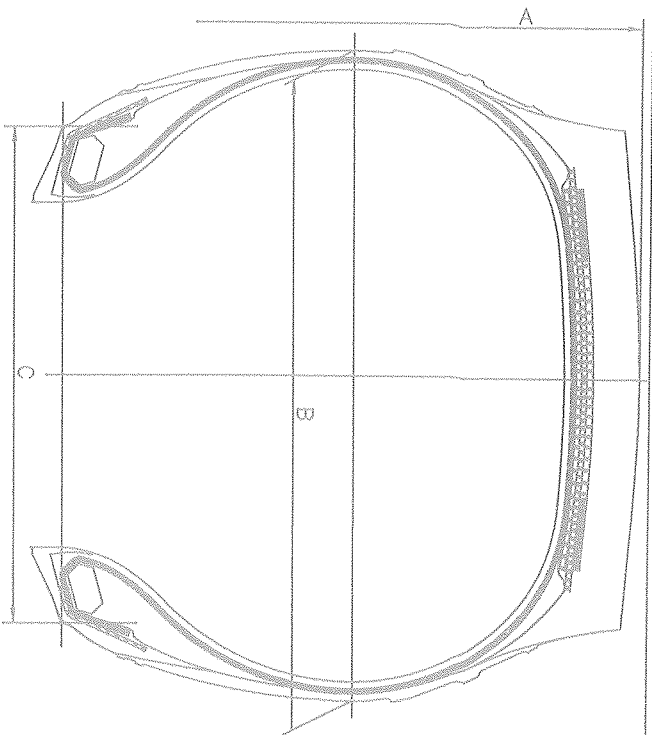

TREAD PATTERNS



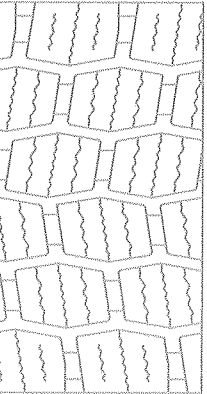


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| AUPTNE     | ADW2               |
| MAXELL     | MWR2               |
| ANEMOI     | ADW2               |

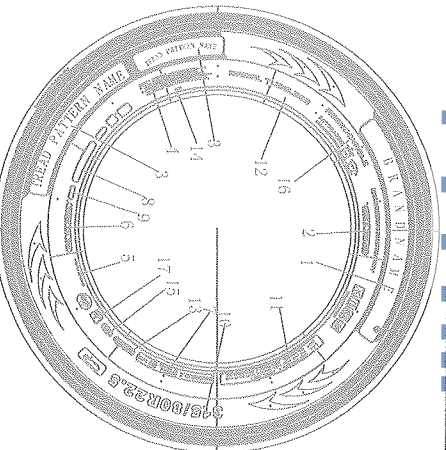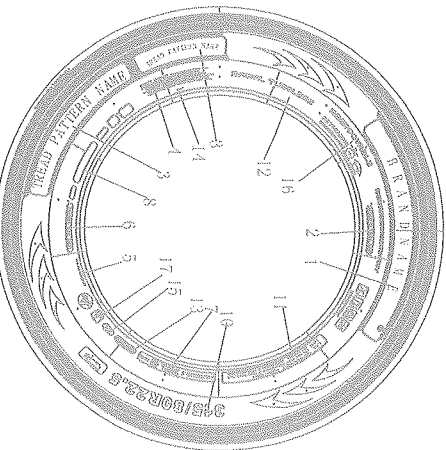

UPPER MOLD

LOWER MOLD

|    |                                                                                                                                                                                |                         |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| 17 | ▲                                                                                                                                                                              |                         |
| 16 | REGROOVABLE                                                                                                                                                                    |                         |
| 15 | M+S                                                                                                                                                                            |                         |
| 14 | ***** (MOLD NUMBER)                                                                                                                                                            |                         |
| 13 | TRACTION                                                                                                                                                                       |                         |
| 12 | RADIAL TUBELESS                                                                                                                                                                |                         |
| 11 | LR. L PILES: TREAD STEEL 4 SIDEWALL STEEL 1<br>20PR MAX LOAD: SINGLE 4000 kg (8820lbs) AT 850 kPa (123 psi) COLD<br>MAX LOAD: DUAL 3350 kg (7390lbs) AT 850 kPa (123 psi) COLD |                         |
| 10 | 315/80R22.5                                                                                                                                                                    |                         |
| 9  |                                                                                                                                                                                | ***** (PRODUCTION DATE) |
| 8  | E9 006066                                                                                                                                                                      |                         |
| 7  | 315/80R22.5 156/150L AT 850 kPa                                                                                                                                                | 154M 20PR<br>150        |
| 6  | DOT...                                                                                                                                                                         |                         |
| 5  | STANDARD RIM 9.00                                                                                                                                                              |                         |
| 4  | WARNING.....                                                                                                                                                                   |                         |
| 3  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                             |                         |
| 2  | MADE IN THAILAND                                                                                                                                                               |                         |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                             |                         |
|    | UPPER MOLD                                                                                                                                                                     | LOWER MOLD              |

|             |            |              |      |        |        |        |       |
|-------------|------------|--------------|------|--------|--------|--------|-------|
| 315/80R22.5 | 156/150    | 150          | L M  | TL     | 1076   | 312    | 228.5 |
| TYRE SIZE   | LOAD INDEX | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |       |

Approve by:

Signature



Check by:

Signature

Draft by:

Signature



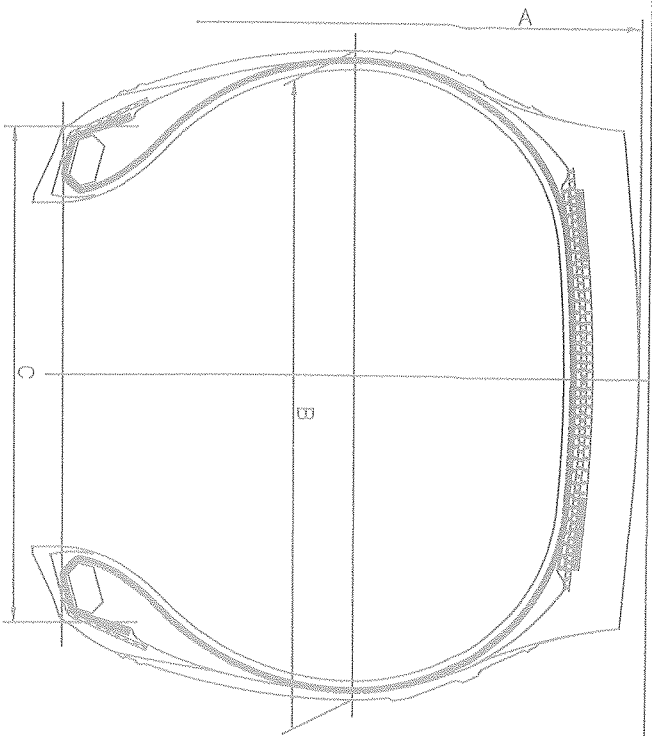

TREAD  
PATTERNS






TABLE 1

|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| ORNET      | OT131              |

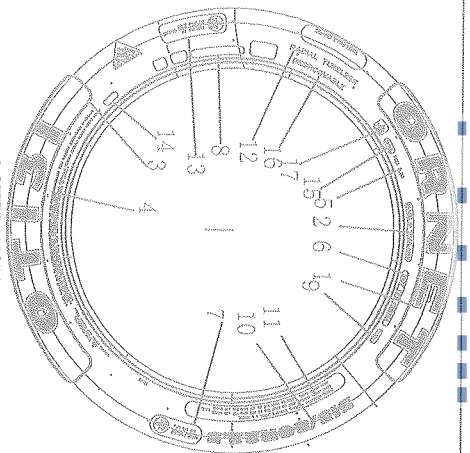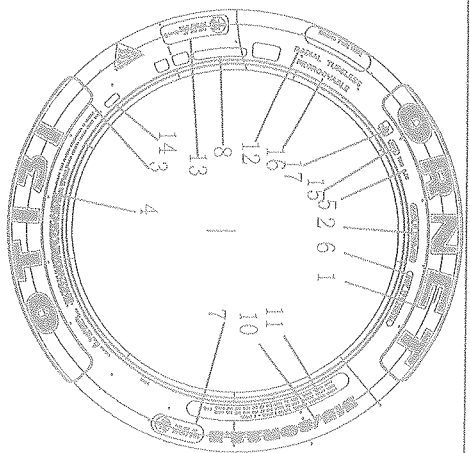

|    |                                                                     |                       |
|----|---------------------------------------------------------------------|-----------------------|
| 17 | REGR groovABLE                                                      |                       |
| 16 | M+S                                                                 |                       |
| 15 | *** (MOLD NUMBER)                                                   |                       |
| 14 | 20PR 156/150L AT 850 kPa                                            | 154M 150M             |
| 13 | RADIAL TUBELESS                                                     |                       |
| 12 | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL+3 STEEL                       |                       |
| 11 | MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L |                       |
| 10 | MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD         |                       |
| 9  | 315/80R22.5                                                         |                       |
| 8  | DOT...                                                              | *** (PRODUCTION DATE) |
| 7  | 156/150L AT 850 kPa                                                 | 154M 150M             |
| 6  | RIM 9.00                                                            |                       |
| 5  | WARNING.....                                                        |                       |
| 4  | PLEASE SEE THE TABLE 1 ON THE LEFT                                  |                       |
| 3  | MADE IN THAILAND                                                    |                       |
| 2  | UPPER MOLD                                                          | LOWER MOLD            |

|             |            |              |      |        |        |        |
|-------------|------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150    | L M          | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:


张艳

Check by:

张艳

Draft by:

张艳



| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |

| BRAND NAME   | TREAD PATTERN NAME |
|--------------|--------------------|
| LINGLONG     | ETS100             |
| SHANLING     | ETS100             |
| LEAO         | ETS100             |
| Infinity     | ETS100             |
| BENCHMARK    | ETS100             |
| CROSSWIND    | CWS10E             |
| BARU.FY      | BL221              |
| SUMO FIRENZA | DRIVUS-S           |

|    |                                                                                                                                                                                         |
|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 17 |                                                                                                       |
| 16 | M+S                                                                                                                                                                                     |
| 15 | (E9) 006066                                                                                                                                                                             |
| 14 | BRAND TYRE HERE                                                                                                                                                                         |
| 13 | 156/150L AT 850 kPa                                                                                  |
| 12 | RIM 9.00                                                                                                                                                                                |
| 11 | 315/80R22.5                                                                                                                                                                             |
| 10 | ***** (MOLD NUMBER)                                                                                                                                                                     |
| 9  | ***** (PRODUCTION DATE)                                                                                                                                                                 |
| 8  | DOT ...                                                                                                                                                                                 |
| 7  | RADIAL TUBELESS                                                                                                                                                                         |
| 6  | WARNING.....                                                                                                                                                                            |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                      |
| 4  | MADE IN THAILAND                                                                                                                                                                        |
| 3  | 20PR PLYS: SIDEWALL 1 STEEL TREAD 1 STEEL 44 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |
| 2  | REGROOVABLE                                                                                                                                                                             |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                      |
|    | UPPER MOLD                                                                                                                                                                              |
|    | LOWER MOLD                                                                                                                                                                              |



|             |                   |              |      |        |        |        |
|-------------|-------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (150/130) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX        | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

5

张艳

陈



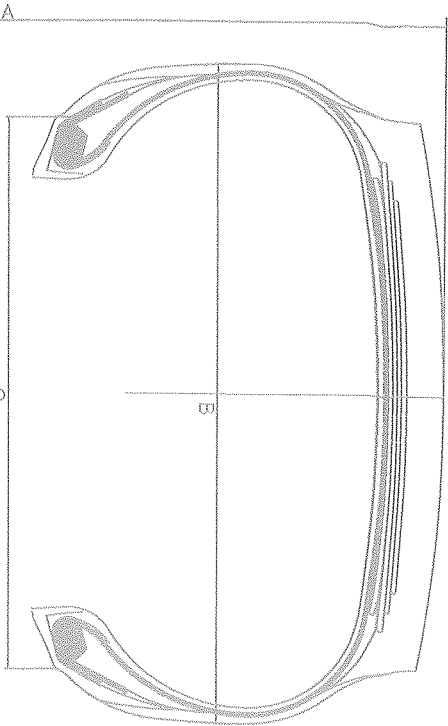

TREAD PATTERNS






TABLE 1

| BRAND NAME    | TREAD PATTERN NAME |
|---------------|--------------------|
| LINGLONG      | ETD100             |
| SHANLING      | ETD100             |
| LEAO          | ETD100             |
| Infinity      | ETD100             |
| BENCHMARK     | ETD100             |
| CROSSWIND     | CWD10E             |
| BARKLEY       | BL831              |
| SLIMO PIRENZA | DRIVUS-D           |
| GREEN MAX     | GRD802             |

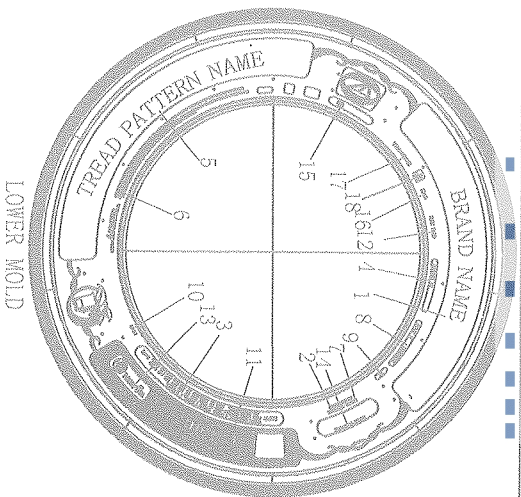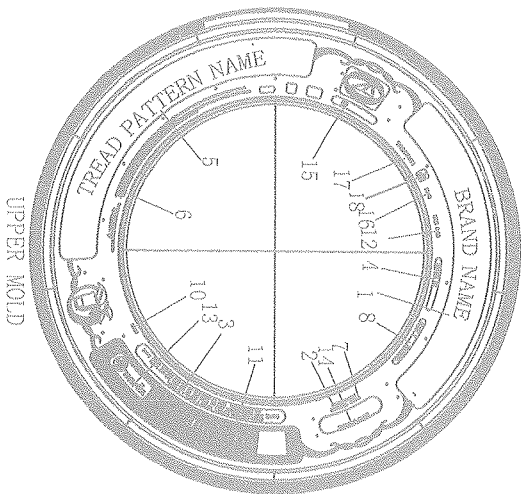

|             |                                                                                                                                                                                         |                                                                                       |      |                        |        |        |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------|------------------------|--------|--------|
| 18          |                                                                                                        |                                                                                       |      |                        |        |        |
| 17          | TRACTION                                                                                                                                                                                |                                                                                       |      |                        |        |        |
| 16          | M+S                                                                                                                                                                                     |                                                                                       |      |                        |        |        |
| 15          | E9 006066                                                                                                                                                                               |                                                                                       |      |                        |        |        |
| 14          | BRAND TYRE HERE                                                                                                                                                                         |                                                                                       |      |                        |        |        |
| 13          | 156/150L AT 850 kPa                                                                                  |                                                                                       |      |                        |        |        |
| 12          | RIM 9.00                                                                                                                                                                                |                                                                                       |      |                        |        |        |
| 11          | 315/80R22.5                                                                                                                                                                             |                                                                                       |      |                        |        |        |
| 10          | **** (MOLD NUMBER)                                                                                                                                                                      |                                                                                       |      |                        |        |        |
| 9           |                                                                                                                                                                                         |                                                                                       |      | **** (PRODUCTION DATE) |        |        |
| 8           | DOT ...                                                                                                                                                                                 |                                                                                       |      |                        |        |        |
| 7           | RADIAL TUBELESS                                                                                                                                                                         |                                                                                       |      |                        |        |        |
| 6           | WARNING.....                                                                                                                                                                            |                                                                                       |      |                        |        |        |
| 5           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                      |                                                                                       |      |                        |        |        |
| 4           | MADE IN THAILAND                                                                                                                                                                        |                                                                                       |      |                        |        |        |
| 3           | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL-4 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR.L<br>MAX LOAD: DUAL 3850 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                                                                                       |      |                        |        |        |
| 2           | REGROOVABLE                                                                                                                                                                             |                                                                                       |      |                        |        |        |
| 1           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                      |                                                                                       |      |                        |        |        |
|             | UPPER MOLD                                                                                                                                                                              |                                                                                       |      | LOWER MOLD             |        |        |
| 315/80R22.5 | 156/150                                                                                              | L  | TL   | 1076                   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                                                                                                              | SPEED SYMBOL                                                                          | TYPE | A (mm)                 | B (mm) | C (mm) |

Approve by:





Check by:

Draft by:

Handwritten signature

Handwritten signature

Handwritten signature

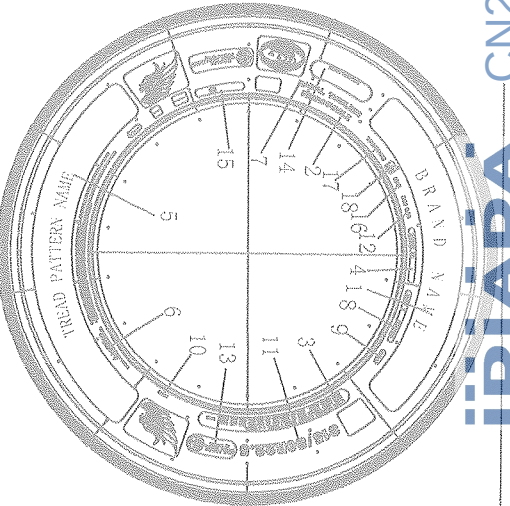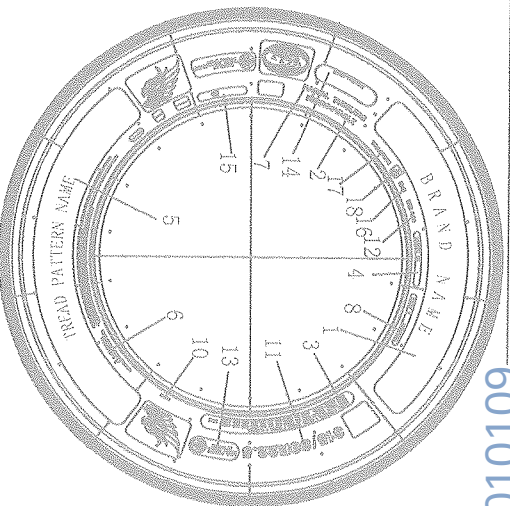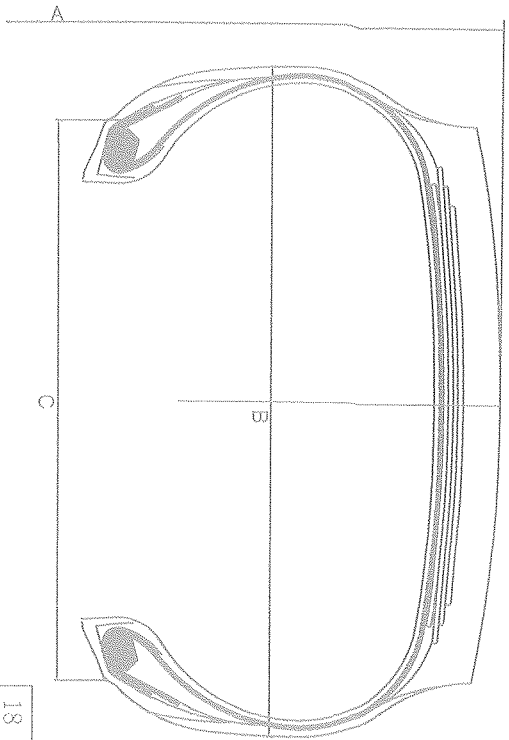

UPPER MOLD

LOWER MOLD

TREAD PATTERNS




TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LINGLONG   | KTD300             |
| SHANLING   | KTD300             |
| LEAO       | KTD300             |
| Infinity   | KTD300             |
| BENCHMARK  | KTD300             |
| CROSSWIND  | CWD30K             |
| BARKLEY    | BL833              |
| TECHKING   | TASK DH            |

|                                    |                                                                    |
|------------------------------------|--------------------------------------------------------------------|
| 18                                 | TRACTION                                                           |
| 17                                 | M+S                                                                |
| 16                                 | (E9) 006066                                                        |
| 15                                 | BRAND TYRE HERE                                                    |
| 14                                 | 156/150L AT 850 kPa (150)                                          |
| 13                                 | RIM 9.00                                                           |
| 12                                 | 315/80R22.5                                                        |
| 11                                 | *** (MOLD NUMBER)                                                  |
| 10                                 | *** (PRODUCTION DATE)                                              |
| 9                                  | DOT ...                                                            |
| 8                                  | RADIAL TUBELESS                                                    |
| 7                                  | WARNING.....                                                       |
| 6                                  | PLEASE SEE THE TABLE 1 ON THE LEFT                                 |
| 5                                  | MADE IN THAILAND                                                   |
| 4                                  | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL+4 STEEL                      |
| 3                                  | MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR.L |
| 2                                  | MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD        |
| 1                                  | REGROOVABLE                                                        |
| PLEASE SEE THE TABLE 1 ON THE LEFT |                                                                    |
| UPPER MOLD                         |                                                                    |
| LOWER MOLD                         |                                                                    |

|             |              |              |      |        |        |        |
|-------------|--------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (E9) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX   | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:




Signature

Check by:

Signature

Draft by:

Signature

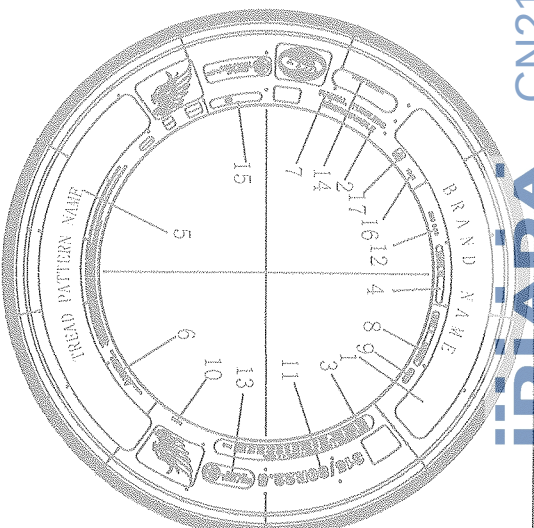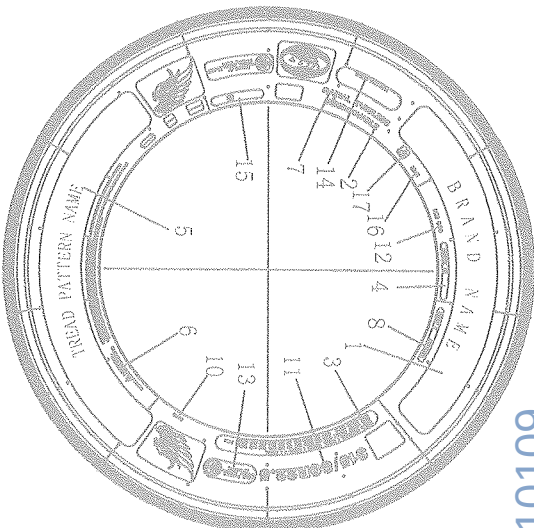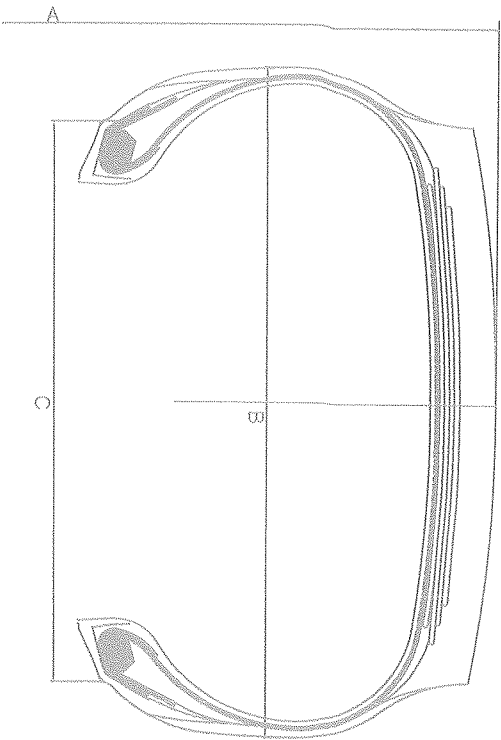

UPPER MOLD

LOWER MOLD

TREAD PATTERNS

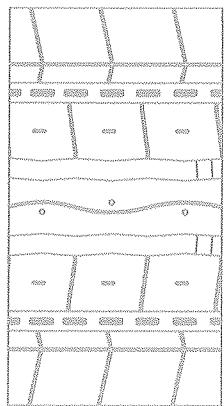


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| LINGLONG   | KTS300             |
| SHANLING   | KTS300             |
| LEAO       | KTS300             |
| Infinity   | KTS300             |
| BENCHMARK  | KTS300             |
| CROSSWIND  | CWS30K             |
| TECHKING   | TASK ST            |
| BARRELY    | BL223              |

|             |                                                                                                                                                                                    |              |      |        |        |        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|--------|--------|--------|
| 17          |                                                                                                                                                                                    |              |      |        |        |        |
| 16          | M+S                                                                                                                                                                                |              |      |        |        |        |
| 15          | (E9) 006066                                                                                                                                                                        |              |      |        |        |        |
| 14          | BRAND TYRE HERE                                                                                                                                                                    |              |      |        |        |        |
| 13          | 156/150 L AT 850 kPa (156/150)                                                                                                                                                     |              |      |        |        |        |
| 12          | RIM 9.00                                                                                                                                                                           |              |      |        |        |        |
| 11          | 315/80R22.5                                                                                                                                                                        |              |      |        |        |        |
| 10          | **** (MOLD NUMBER)                                                                                                                                                                 |              |      |        |        |        |
| 9           | **** (PRODUCTION DATE)                                                                                                                                                             |              |      |        |        |        |
| 8           | DOT ...                                                                                                                                                                            |              |      |        |        |        |
| 7           | RADIAL TUBELESS                                                                                                                                                                    |              |      |        |        |        |
| 6           | WARNING.....                                                                                                                                                                       |              |      |        |        |        |
| 5           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                 |              |      |        |        |        |
| 4           | MADE IN THAILAND                                                                                                                                                                   |              |      |        |        |        |
| 3           | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL+4 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR.L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |              |      |        |        |        |
| 2           | REGROOVABLE                                                                                                                                                                        |              |      |        |        |        |
| 1           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                 |              |      |        |        |        |
|             | UPPER MOLD                                                                                                                                                                         | LOWER MOLD   |      |        |        |        |
| 315/80R22.5 | 156/150 (156/150)                                                                                                                                                                  | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                                                                                                         | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Signature



Check by:

Signature

Draft by:

Signature



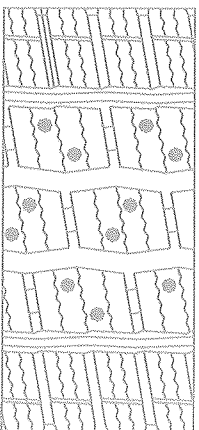

# TREAD PATTERNS

TABLE I

| BRAND NAME   | TREAD PATTERN NAME |
|--------------|--------------------|
| LINGLONG     | KWS600             |
| SHANLING     | KWS600             |
| LEAO         | KWS600             |
| Infinity     | KWS600             |
| BENCHMARK    | KWS600             |
| CROSSWIND    | CWS60W             |
| BARLEY       | BLW12              |
| SUMO HIRINZA | DRIVUS-WS          |





|    |                                                                                                                                                                                 |                                           |                       |      |        |        |                       |  |  |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-----------------------|------|--------|--------|-----------------------|--|--|
| 17 |                                                                                                                                                                                 |                                           |                       |      |        |        |                       |  |  |
| 16 | M+S                                                                                                                                                                             |                                           |                       |      |        |        |                       |  |  |
| 15 | E9 006066                                                                                                                                                                       |                                           |                       |      |        |        |                       |  |  |
| 14 | BRAND TYRE HERE                                                                                                                                                                 |                                           |                       |      |        |        |                       |  |  |
| 13 | 156/150 L AT 850 kPa<br>$\left(\frac{154}{150}\right)$                                                                                                                          |                                           |                       |      |        |        |                       |  |  |
| 12 | RIM 9.00                                                                                                                                                                        |                                           |                       |      |        |        |                       |  |  |
| 11 | 315/80R22.5                                                                                                                                                                     |                                           |                       |      |        |        |                       |  |  |
| 10 | *** (MOLD NUMBER)                                                                                                                                                               |                                           |                       |      |        |        |                       |  |  |
| 9  |                                                                                                                                                                                 |                                           |                       |      |        |        | *** (PRODUCTION DATE) |  |  |
| 8  | DOT ...                                                                                                                                                                         |                                           |                       |      |        |        |                       |  |  |
| 7  | RADIAL TUBELESS                                                                                                                                                                 |                                           |                       |      |        |        |                       |  |  |
| 6  | WARNING.....                                                                                                                                                                    |                                           |                       |      |        |        |                       |  |  |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                              |                                           |                       |      |        |        |                       |  |  |
| 4  | MADE IN THAILAND                                                                                                                                                                |                                           |                       |      |        |        |                       |  |  |
| 3  | PIES: SIDEWALL 1 STEEL TREAD 1 STEEL+4 STEEL<br>MAX LOAD SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR.L<br>MAX LOAD DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                                           |                       |      |        |        |                       |  |  |
| 2  | REGROOVABLE                                                                                                                                                                     |                                           |                       |      |        |        |                       |  |  |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                              |                                           |                       |      |        |        |                       |  |  |
|    | UPPER MOLD                                                                                                                                                                      |                                           |                       |      |        |        | LOWER MOLD            |  |  |
|    | 315/80R22.5                                                                                                                                                                     | 156/150<br>$\left(\frac{154}{150}\right)$ | L<br>$\left(M\right)$ | TL   | 1076   | 312    | 228.5                 |  |  |
|    | TYRE SIZE                                                                                                                                                                       | LOAD INDEX                                | SPEED SYMBOL          | TYPE | A (mm) | B (mm) | C (mm)                |  |  |

Approve by:

Check by:

Draft by:

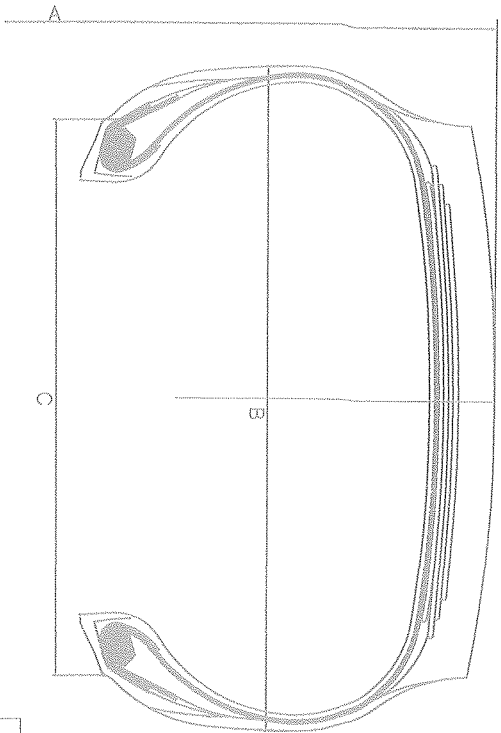

TREAD PATTERNS



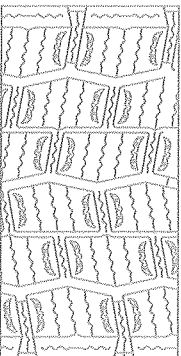


TABLE 1

| BRAND NAME  | TREAD PATTERN NAME |
|-------------|--------------------|
| LINGLONG    | KWD600             |
| SHANLING    | KWD600             |
| LEAO        | KWD600             |
| Infinity    | KWD600             |
| BENCHMARK   | KWD600             |
| CROSSWIND   | CWD60W             |
| BARKLEY     | BLW18              |
| SI-MO RENZA | DRIVUS-WD          |

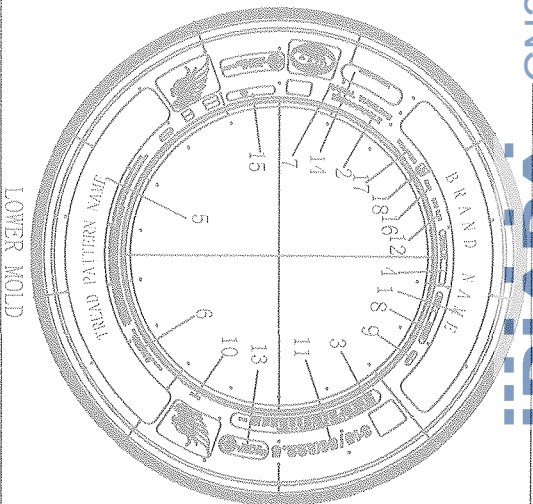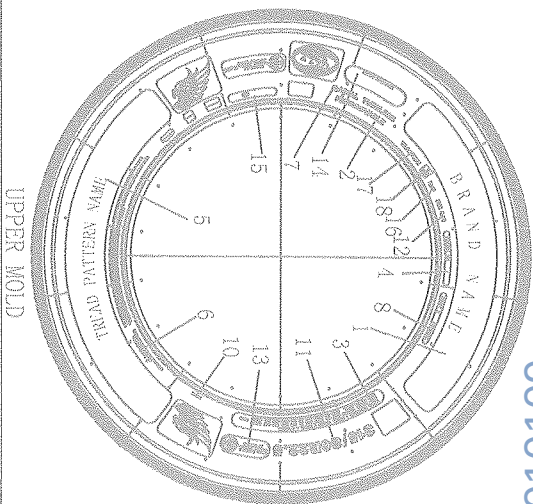

|             |                                                                                                                                                                                     |              |      |        |        |        |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|--------|--------|--------|
| 18          |                                                                                                                                                                                     |              |      |        |        |        |
| 17          | TRACTION                                                                                                                                                                            |              |      |        |        |        |
| 16          | M+S                                                                                                                                                                                 |              |      |        |        |        |
| 15          | (E9) 006066                                                                                                                                                                         |              |      |        |        |        |
| 14          | BRAND TYRE HERE                                                                                                                                                                     |              |      |        |        |        |
| 13          | 156/150L AT 850 kPa (154/150)                                                                                                                                                       |              |      |        |        |        |
| 12          | RIM 9.00                                                                                                                                                                            |              |      |        |        |        |
| 11          | 315/80R22.5                                                                                                                                                                         |              |      |        |        |        |
| 10          | ***** (MOLD NUMBER)                                                                                                                                                                 |              |      |        |        |        |
| 9           | ***** (PRODUCTION DATE)                                                                                                                                                             |              |      |        |        |        |
| 8           | DOT ...                                                                                                                                                                             |              |      |        |        |        |
| 7           | RADIAL TUBELESS                                                                                                                                                                     |              |      |        |        |        |
| 6           | WARNING.....                                                                                                                                                                        |              |      |        |        |        |
| 5           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |              |      |        |        |        |
| 4           | MADE IN THAILAND                                                                                                                                                                    |              |      |        |        |        |
| 3           | PILES: SIDEWALL 1 STEEL TREAD 1 STEEL +4 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR.L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |              |      |        |        |        |
| 2           | REGROOVABLE                                                                                                                                                                         |              |      |        |        |        |
| 1           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |              |      |        |        |        |
|             | UPPER MOLD                                                                                                                                                                          | LOWER MOLD   |      |        |        |        |
| 315/80R22.5 | 156/150 (154/150)                                                                                                                                                                   | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                                                                                                          | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Check by:


Draft by:

2011.10.16

张艳

张艳





# TREAD PATTERNS



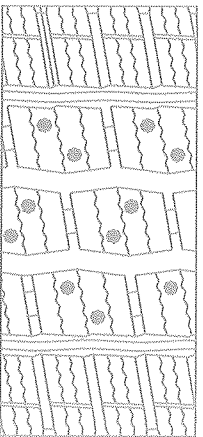


TABLE I

|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| GREEN MAX  | GWS828             |

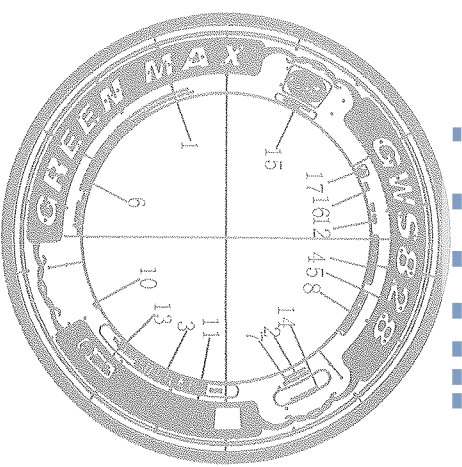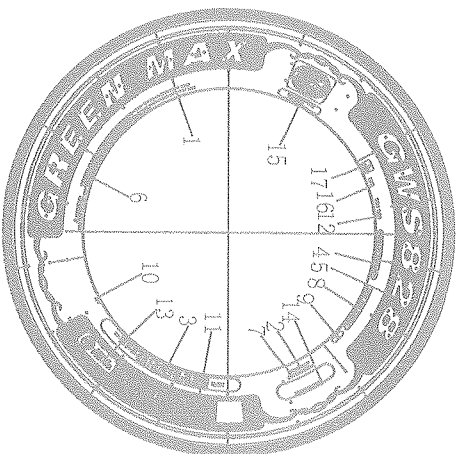

**STRENGTH**



|    |                                                                                                                                                                                            |                        |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 17 |                                                                                                                                                                                            |                        |
| 16 | M+S                                                                                                                                                                                        |                        |
| 15 | (E9) 006066                                                                                                                                                                                |                        |
| 14 | BRAND TYRE HERE                                                                                                                                                                            |                        |
| 13 | 156/150 L AT 850 kPa $\left(\frac{152}{150}\right)$                                                                                                                                        |                        |
| 12 | RIM 9.00                                                                                                                                                                                   |                        |
| 11 | 315/80R22.5                                                                                                                                                                                |                        |
| 10 | *** (MOLD NUMBER)                                                                                                                                                                          |                        |
| 9  |                                                                                                                                                                                            | **** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                                    |                        |
| 7  | RADIAL TUBELESS                                                                                                                                                                            |                        |
| 6  | WARNING.....                                                                                                                                                                               |                        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |                        |
| 4  | MADE IN THAILAND                                                                                                                                                                           |                        |
| 3  | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL 14 STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L.<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                        |
| 2  | REGROOVABLE                                                                                                                                                                                |                        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |                        |
|    | UPPER MOLD                                                                                                                                                                                 | LOWER MOLD             |

|             |                                   |                  |      |        |        |        |
|-------------|-----------------------------------|------------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 <del>(154)</del><br>(150) | L <del>(M)</del> | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                        | SPEED SYMBOL     | TYPE | A (mm) | B (mm) | C (mm) |

Approved by:

Check by:

Draft by:

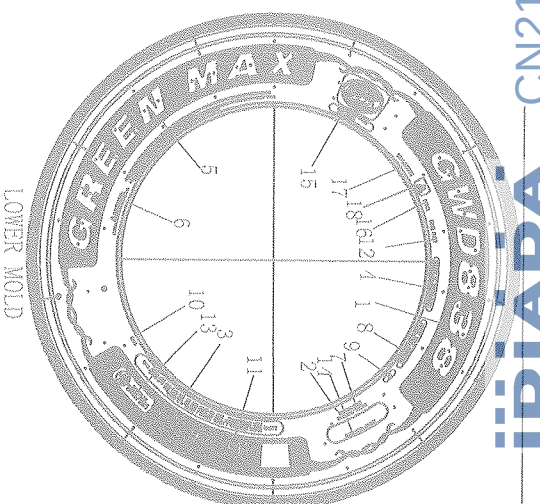

|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| GREEN MAX  | GMD838             |

|    |                                                                                                                                                                                        |                        |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 18 |                                                                                                       |                        |
| 17 | TRACTION                                                                                                                                                                               |                        |
| 16 | M+S                                                                                                                                                                                    |                        |
| 15 | (E9) 006066                                                                                                                                                                            |                        |
| 14 | BRAND TYRE HERE                                                                                                                                                                        |                        |
| 13 | 156/150L AT 850 kPa <sup>(151)</sup> <sub>(150)</sub>                                                                                                                                  |                        |
| 12 | RIM 9.00                                                                                                                                                                               |                        |
| 11 | 315/80R22.5                                                                                                                                                                            |                        |
| 10 | **** (MOLD NUMBER)                                                                                                                                                                     |                        |
| 9  |                                                                                                                                                                                        | **** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                                |                        |
| 7  | RADIAL TUBELESS                                                                                                                                                                        |                        |
| 6  | WARNING.....                                                                                                                                                                           |                        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                     |                        |
| 4  | MADE IN THAILAND                                                                                                                                                                       |                        |
| 3  | 20PR PILES: SIDERWALL STEEL TREAD 1 STEEL+4STEEL<br>MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R.L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                        |
| 2  | REGROOVABLE                                                                                                                                                                            |                        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                     |                        |
|    | UPPER MOLD                                                                                                                                                                             | LOWER MOLD             |

|             |                   |              |      |        |        |        |
|-------------|-------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (154/130) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX        | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

10-11-12

张艳

卷之五






TREAD  
PATTERNS

TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| GREEN MAX  | GRD806             |

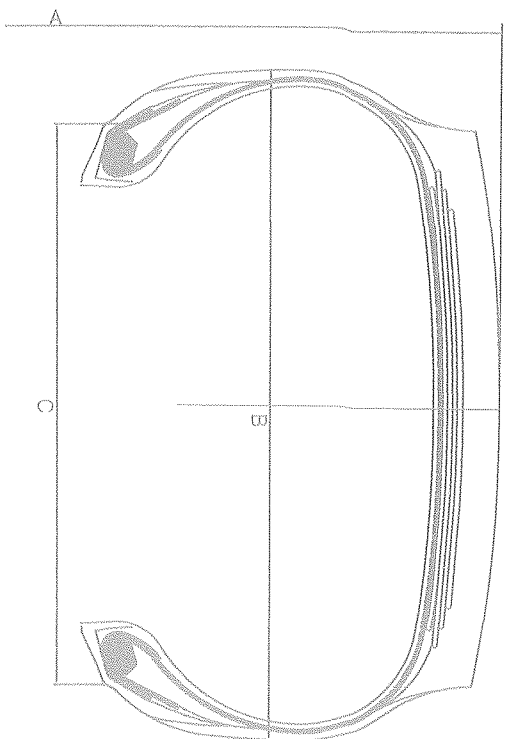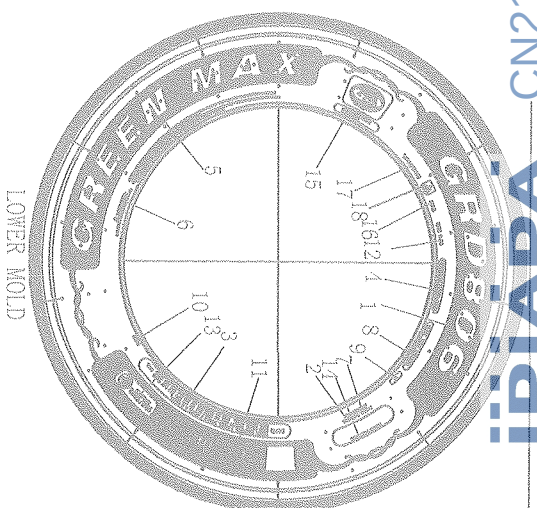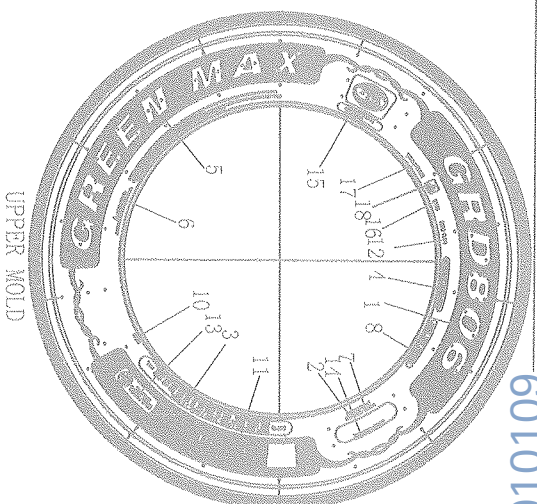

|    |                                                                    |                         |
|----|--------------------------------------------------------------------|-------------------------|
| 18 | TRACTION                                                           |                         |
| 17 | M+S                                                                |                         |
| 16 | (E9) 006066                                                        |                         |
| 15 | BRAND TYRE HERE                                                    |                         |
| 14 | 156/150L AT 850 kPa (5.4/30.0)                                     |                         |
| 13 | RIM 9.00                                                           |                         |
| 12 | 315/80R22.5                                                        |                         |
| 11 | ***** (MOLD NUMBER)                                                |                         |
| 10 | DOT ...                                                            | ***** (PRODUCTION DATE) |
| 9  | RADIAL TUBELESS                                                    |                         |
| 8  | WARNING.....                                                       |                         |
| 7  | PLEASE SEE THE TABLE 1 ON THE LEFT                                 |                         |
| 6  | MADE IN THAILAND                                                   |                         |
| 5  | 20PR PILES: SIDEWALL 1 STEEL TREAD 1 STEEL 24 STEEL                |                         |
| 4  | MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD LR L |                         |
| 3  | MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD        |                         |
| 2  | REGROOVABLE                                                        |                         |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                 |                         |
|    | UPPER MOLD                                                         | LOWER MOLD              |



|             |                    |              |      |        |        |        |
|-------------|--------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (5.4/30.0) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX         | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Check by:

Draft by:



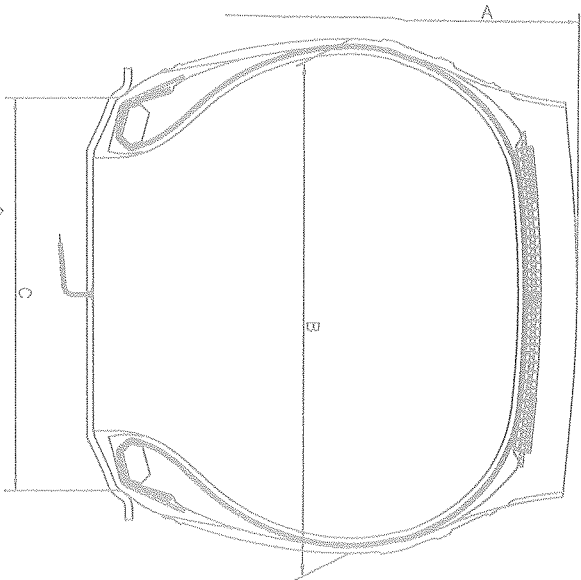

TREAD  
PATTERNS



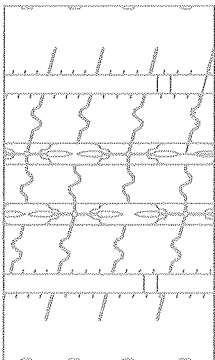


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| HUBTRAC    | HIGHWAY S11        |

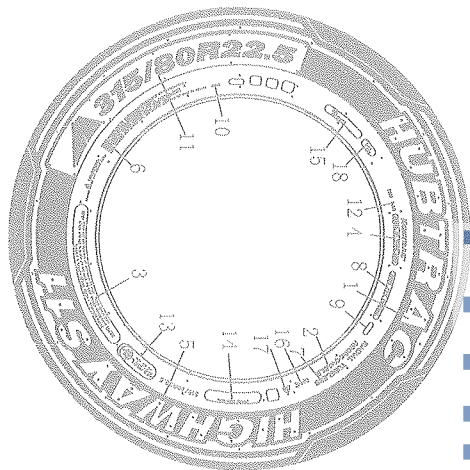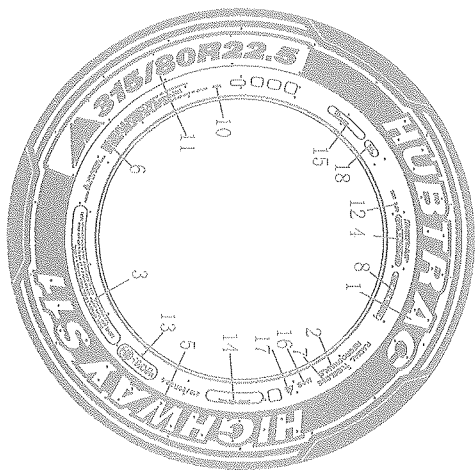

|    |                                                                                                                                                                                  |                         |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| 18 | HL                                                                                                                                                                               |                         |
| 17 |                                                                                                                                                                                  |                         |
| 16 | M+S                                                                                                                                                                              |                         |
| 15 | (E9) 006066                                                                                                                                                                      |                         |
| 14 | BRAND TYRE HERE                                                                                                                                                                  |                         |
| 13 | 158/150 L (154M)<br>AT 900 kPa(150)                                                                                                                                              |                         |
| 12 | RIM 9.00                                                                                                                                                                         |                         |
| 11 | 315/80R22.5                                                                                                                                                                      |                         |
| 10 | ***** (MOLD NUMBER)                                                                                                                                                              |                         |
| 9  |                                                                                                                                                                                  | ***** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                          |                         |
| 7  | RADIAL TUBELESS                                                                                                                                                                  |                         |
| 6  | WARNING.....                                                                                                                                                                     |                         |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                               |                         |
| 4  | MADE IN THAILAND                                                                                                                                                                 |                         |
| 3  | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL+3 STEEL<br>MAX LOAD: SINGLE 4250 kg (9370 lbs) AT 900 kPa(130 psi) COLD LR.M<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 900 kPa(130 psi) COLD |                         |
| 2  | REGROOVABLE                                                                                                                                                                      |                         |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                               |                         |
|    | UPPER MOLD                                                                                                                                                                       | LOWER MOLD              |

|             |               |              |      |        |        |        |
|-------------|---------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 (154) | L (M)        | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX    | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

张艳


Check by:

张艳

Draft by:

张艳





TREAD  
PATTERNS



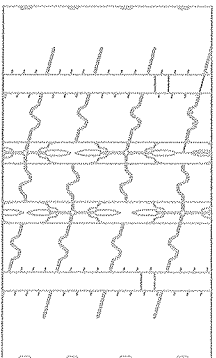


TABLE I

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| HUBTRAC    | HIGHWAY S11        |

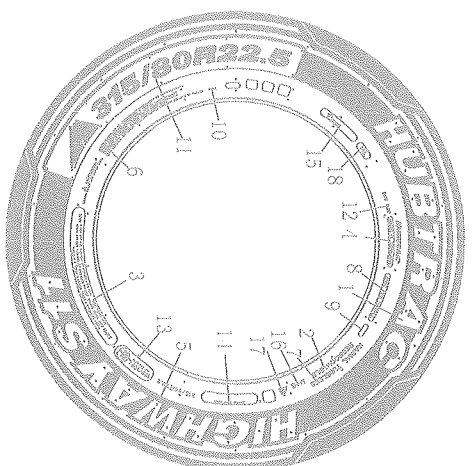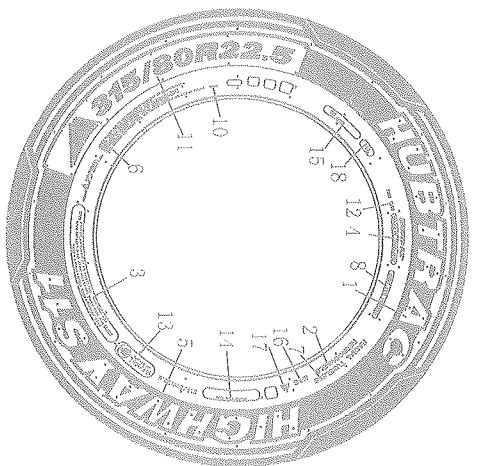



|    |                                                                                                                                                                                 |                        |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 18 | HL                                                                                                                                                                              |                        |
| 17 |                                                                                               |                        |
| 16 | M+S                                                                                                                                                                             |                        |
| 15 | (E9) 006066                                                                                                                                                                     |                        |
| 14 | BRAND TYRE HERE                                                                                                                                                                 |                        |
| 13 | 158/150 L (154 M)<br>AT 900 kPa (150)                                                                                                                                           |                        |
| 12 | RIM 9.00                                                                                                                                                                        |                        |
| 11 | 315/80R22.5                                                                                                                                                                     |                        |
| 10 | **** (MOLD NUMBER)                                                                                                                                                              |                        |
| 9  |                                                                                                                                                                                 | **** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                         |                        |
| 7  | RADIAL TUBELESS                                                                                                                                                                 |                        |
| 6  | WARNING.....                                                                                                                                                                    |                        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                              |                        |
| 4  | MADE IN THAILAND                                                                                                                                                                |                        |
| 3  | PIES: SIDEWALL 1 STEEL, TREAD 1 STEEL+4 STEEL<br>MAX LOAD: SINGLE 4250 kg(9370 lbs) AT 900 kPa(130 psi) COLD 1.8 M<br>MAX LOAD: DUAL 3350 kg(7385 lbs) AT 900 kPa(130 psi) COLD |                        |
| 2  | REGROOVABLE                                                                                                                                                                     |                        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                              |                        |
|    | UPPER MOLD                                                                                                                                                                      | LOWER MOLD             |

|             |                                         |                   |      |        |        |        |
|-------------|-----------------------------------------|-------------------|------|--------|--------|--------|
| 315/80R22.5 | 158/150 <sup>(13)</sup> <sub>(30)</sub> | L <sup>(14)</sup> | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                              | SPRINT SYMBOL.    | TYPE | A (mm) | B (mm) | C (mm) |

Approved by:

Check by:

Dr. J. D. ...

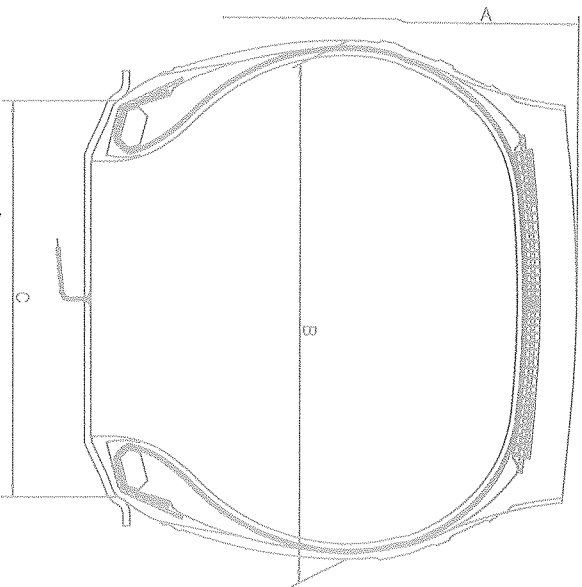

TREAD  
PATTERNS






TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| HUBTRAC    | HIGHWAY D11        |

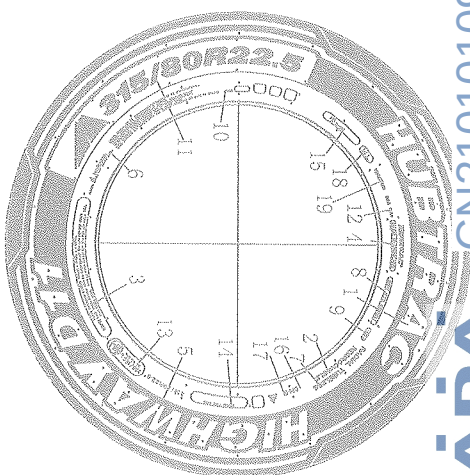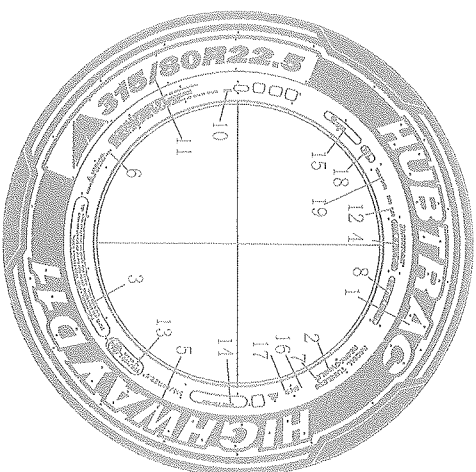

60101012N3

AGYI

|    |                                                                                                                                                                                       |                 |              |            |                         |        |        |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------|------------|-------------------------|--------|--------|
| 19 | TRACTION                                                                                                                                                                              |                 |              |            |                         |        |        |
| 18 | HL                                                                                                                                                                                    |                 |              |            |                         |        |        |
| 17 |                                                                                                     |                 |              |            |                         |        |        |
| 16 | M+S                                                                                                                                                                                   |                 |              |            |                         |        |        |
| 15 | (E9) 006066                                                                                                                                                                           |                 |              |            |                         |        |        |
| 14 | BRAND TYRE HERE                                                                                                                                                                       |                 |              |            |                         |        |        |
| 13 | 156/150 L (154 M)<br>AT 850 kPa (150 M)                                                                                                                                               |                 |              |            |                         |        |        |
| 12 | RIM 9.00                                                                                                                                                                              |                 |              |            |                         |        |        |
| 11 | 315/80R22.5                                                                                                                                                                           |                 |              |            |                         |        |        |
| 10 | ***** (MOLD NUMBER)                                                                                                                                                                   |                 |              |            |                         |        |        |
| 9  |                                                                                                                                                                                       |                 |              |            | ***** (PRODUCTION DATE) |        |        |
| 8  | DOT ...                                                                                                                                                                               |                 |              |            |                         |        |        |
| 7  | RADIAL TUBELESS                                                                                                                                                                       |                 |              |            |                         |        |        |
| 6  | WARNING.....                                                                                                                                                                          |                 |              |            |                         |        |        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                    |                 |              |            |                         |        |        |
| 4  | MADE IN THAILAND                                                                                                                                                                      |                 |              |            |                         |        |        |
| 3  | PLIES: SIDEWALL 1 STEEL, TREAD 1 STEEL+3 STEEL,<br>20PR MAX LOAD:SINGLE 4000 kg(8820 lbs) AT 850 kPa(123 psi) COLD L.R. L<br>MAX LOAD:DUAL 3350 kg(7385 lbs) AT 850 kPa(123 psi) COLD |                 |              |            |                         |        |        |
| 2  | REGROOVABLE                                                                                                                                                                           |                 |              |            |                         |        |        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                    |                 |              |            |                         |        |        |
|    | UPPER MOLD                                                                                                                                                                            |                 |              | LOWER MOLD |                         |        |        |
|    | 315/80R22.5                                                                                                                                                                           | 156/150 (154 M) | L (M)        | TL         | 1076                    | 312    | 228.5  |
|    | TYRE SIZE                                                                                                                                                                             | LOAD INDEX      | SPEED SYMBOL | TYPE       | A (mm)                  | B (mm) | C (mm) |

Approve by:


Check by:

Draft by:

张艳

张艳

张艳



THREAD PATTERNS




TABLE I

|            |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| HUBTRAC    | HIGHWAY D.I.       |

|    |                                                                                                                                                                                            |                         |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| 19 | TRACTION                                                                                                                                                                                   |                         |
| 18 | HL                                                                                                                                                                                         |                         |
| 17 |                                                                                                          |                         |
| 16 | M+S                                                                                                                                                                                        |                         |
| 15 | (E9) 006066                                                                                                                                                                                |                         |
| 14 | BRAND TYRE HERE                                                                                                                                                                            |                         |
| 13 | 156/150 L <br>AT 850 kPa                                                                                |                         |
| 12 | RIM 9. 00                                                                                                                                                                                  |                         |
| 11 | 315/80R22. 5                                                                                                                                                                               |                         |
| 10 | ***** (MOLD NUMBER)                                                                                                                                                                        |                         |
| 9  |                                                                                                                                                                                            | ***** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                                    |                         |
| 7  | RADIAL TUBELESS                                                                                                                                                                            |                         |
| 6  | WARNING.....                                                                                                                                                                               |                         |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |                         |
| 4  | MADE IN THAILAND                                                                                                                                                                           |                         |
| 3  | PLATES: SIDEWALL 1 STEEL TREAD 1 STEEL+4 STEEL<br>20PR MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R. L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                         |
| 2  | REGROOVABLE                                                                                                                                                                                |                         |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |                         |
|    | UPPER MOLD                                                                                                                                                                                 | LOWER MOLD              |



|             |                                        |              |      |        |        |        |
|-------------|----------------------------------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150 $\left(\frac{156}{150}\right)$ | L $\text{M}$ | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                             | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Check by:

Draft by



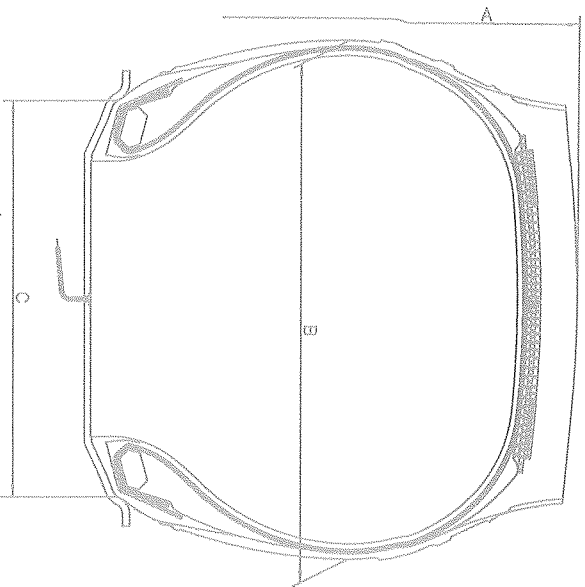

TREAD  
PATTERNS






TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| HUBTRAC    | REGIONAL D11       |

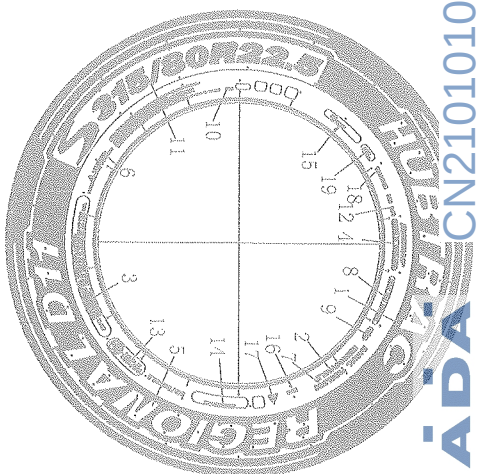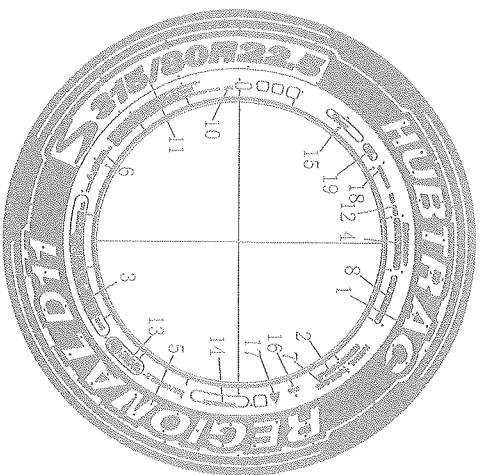

60101012N3

ADYI

|             |                                                                                                                                                                                        |                         |      |        |        |        |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|--------|--------|--------|
| 19          | HL                                                                                                                                                                                     |                         |      |        |        |        |
| 18          | TRACTION                                                                                                                                                                               |                         |      |        |        |        |
| 17          |                                                                                                       |                         |      |        |        |        |
| 16          | M+S                                                                                                                                                                                    |                         |      |        |        |        |
| 15          | (E9) 006066                                                                                                                                                                            |                         |      |        |        |        |
| 14          | BRAND TYRE HERE                                                                                                                                                                        |                         |      |        |        |        |
| 13          | 156/150 L (154)<br>AT 850 kPa                                                                                                                                                          |                         |      |        |        |        |
| 12          | RIM 9.00                                                                                                                                                                               |                         |      |        |        |        |
| 11          | 315/80R22.5                                                                                                                                                                            |                         |      |        |        |        |
| 10          | ***** (MOLD NUMBER)                                                                                                                                                                    |                         |      |        |        |        |
| 9           |                                                                                                                                                                                        | ***** (PRODUCTION DATE) |      |        |        |        |
| 8           | DOT ...                                                                                                                                                                                |                         |      |        |        |        |
| 7           | RADIAL TUBELESS                                                                                                                                                                        |                         |      |        |        |        |
| 6           | WARNING.....                                                                                                                                                                           |                         |      |        |        |        |
| 5           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                     |                         |      |        |        |        |
| 4           | MADE IN THAILAND                                                                                                                                                                       |                         |      |        |        |        |
| 3           | PIES: SIDEWALL 1 STEEL TREAD 1 STEEL+3 STEEL<br>20PR MAX LOAD:SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R. L<br>MAX LOAD:DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                         |      |        |        |        |
| 2           | REGROOVABLE                                                                                                                                                                            |                         |      |        |        |        |
| 1           | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                     |                         |      |        |        |        |
|             | UPPER MOLD                                                                                                                                                                             | LOWER MOLD              |      |        |        |        |
| 315/80R22.5 | 156/150 (154)                                                                                                                                                                          | L (M)                   | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX                                                                                                                                                                             | SPEED SYMBOL            | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

张艳




Check by:

张艳

Draft by:



张艳



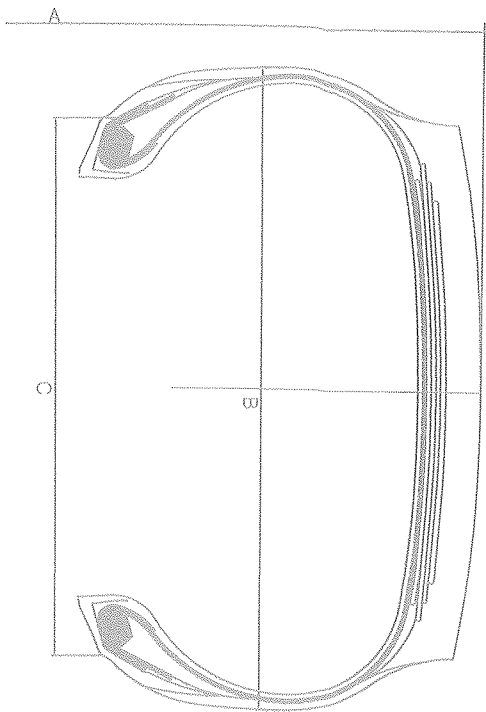

TREAD  
PATTERNS

| TABLE 1    |                    |
|------------|--------------------|
| BRAND NAME | TREAD PATTERN NAME |
| HUBTRAC    | REGIONAL D11       |

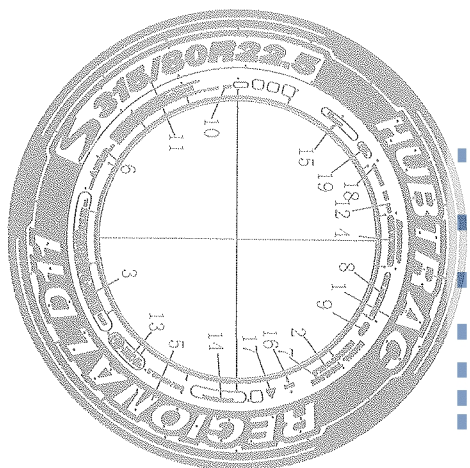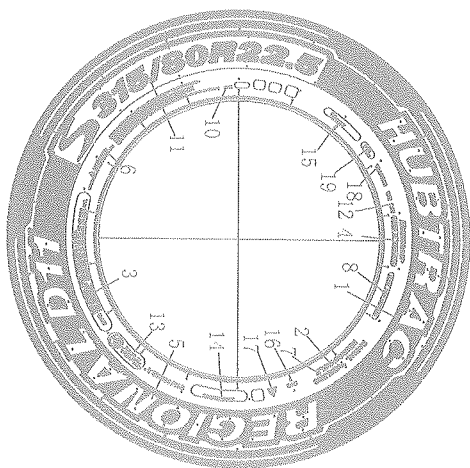


|    |                                                                                                                                                                                           |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 19 | HL                                                                                                                                                                                        |
| 18 | TRACTION                                                                                                                                                                                  |
| 17 |                                                                                                                                                                                           |
| 16 | M+S                                                                                                                                                                                       |
| 15 | E9 006066                                                                                                                                                                                 |
| 14 | BRAND TYRE HERE                                                                                                                                                                           |
| 13 | 156/150 L  154<br>AT 850 kPa                                                                                                                                                              |
| 12 | RIM 9.00                                                                                                                                                                                  |
| 11 | 315/80R22.5                                                                                                                                                                               |
| 10 | **** (MOLD NUMBER)                                                                                                                                                                        |
| 9  |                                                                                                                                                                                           |
| 8  | DOT ...                                                                                                                                                                                   |
| 7  | RADIAL TUBELESS                                                                                                                                                                           |
| 6  | WARNING.....                                                                                                                                                                              |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |
| 4  | MADE IN THAILAND                                                                                                                                                                          |
| 3  | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL+4 STEEL<br>20PR MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R. L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |
| 2  | REGROOVABLE                                                                                                                                                                               |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                        |
|    | UPPER MOLD                                                                                                                                                                                |
|    | LOWER MOLD                                                                                                                                                                                |

|             |              |              |      |        |        |        |
|-------------|--------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150  154 | L            | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX   | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Check by:

Draft by:

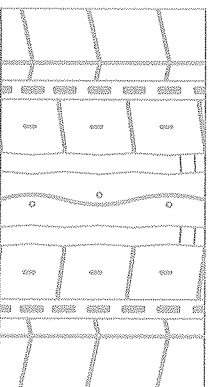

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| HUBTRAC    | REGIONAL S11       |



|    |                                                                                                                                                                                            |                        |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 18 | HL                                                                                                                                                                                         |                        |
| 17 |                                                                                                          |                        |
| 16 | M+S                                                                                                                                                                                        |                        |
| 15 | (E9) 006066                                                                                                                                                                                |                        |
| 14 | BRAND TYRE HERE                                                                                                                                                                            |                        |
| 13 | 156/150 L (154M)<br>AT 850 kPa (150)                                                                                                                                                       |                        |
| 12 | RIM 9.00                                                                                                                                                                                   |                        |
| 11 | 315/80R22.5                                                                                                                                                                                |                        |
| 10 | **** (MOLD NUMBER)                                                                                                                                                                         |                        |
| 9  |                                                                                                                                                                                            | **** (PRODUCTION DATE) |
| 8  | DOT ...                                                                                                                                                                                    |                        |
| 7  | RADIAL TUBELESS                                                                                                                                                                            |                        |
| 6  | WARNING.....                                                                                                                                                                               |                        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |                        |
| 4  | MADE IN THAILAND                                                                                                                                                                           |                        |
| 3  | PLIES: SIDEWALL 1 STEEL TREAD 1 STEEL F3 STEEL<br>20PR MAX LOAD: SINGLE 4000 kg (8820 lbs) AT 850 kPa (123 psi) COLD L.R. L<br>MAX LOAD: DUAL 3350 kg (7385 lbs) AT 850 kPa (123 psi) COLD |                        |
| 2  | REGROOVABLE                                                                                                                                                                                |                        |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                         |                        |
|    | UPPER MOLD                                                                                                                                                                                 | LOWER MOLD             |



100

张范

四生

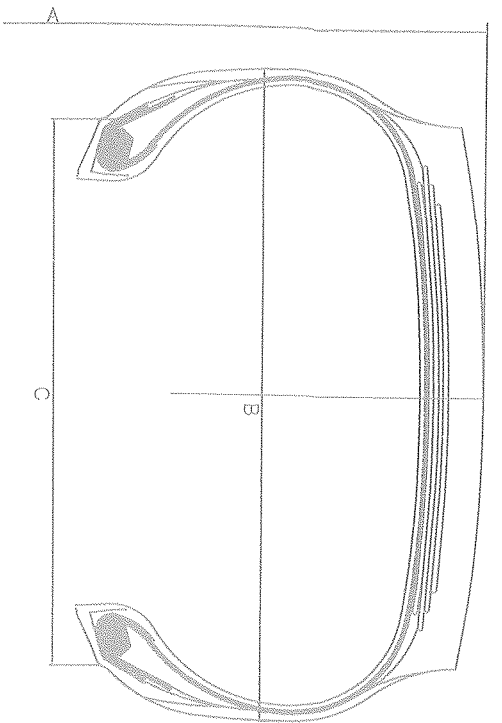

TREAD PATTERNS



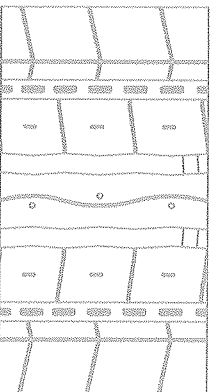


TABLE 1

| BRAND NAME | TREAD PATTERN NAME |
|------------|--------------------|
| HUBTRAC    | REGIONAL S11       |

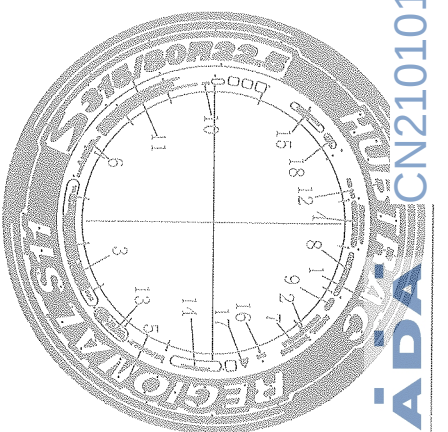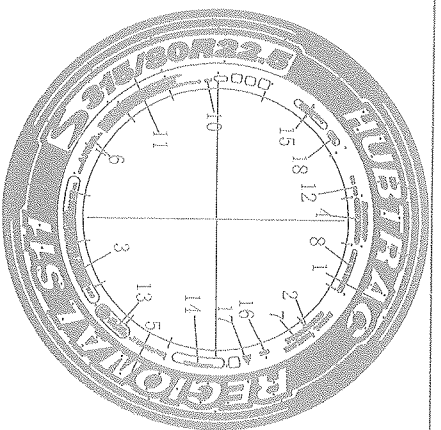

|    |                                                                                                                                                                                     |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18 | HL                                                                                                                                                                                  |
| 17 |                                                                                                                                                                                     |
| 16 | M+S                                                                                                                                                                                 |
| 15 | E9 006066                                                                                                                                                                           |
| 14 | BRAND TYRE HERE                                                                                                                                                                     |
| 13 | 156/150 L  AT 850 kPa                                                                                                                                                               |
| 12 | RIM 9.00                                                                                                                                                                            |
| 11 | 315/80R22.5                                                                                                                                                                         |
| 10 | **** (MOLD NUMBER)                                                                                                                                                                  |
| 9  |                                                                                                                                                                                     |
| 8  | DOT ...                                                                                                                                                                             |
| 7  | RADIAL TUBELESS                                                                                                                                                                     |
| 6  | WARNING.....                                                                                                                                                                        |
| 5  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |
| 4  | MADE IN THAILAND                                                                                                                                                                    |
| 3  | PIES: SIDEWALL 1 STEEL, TREAD 1 STEEL+4 STEEL<br>20PR MAX LOAD: SINGLE 4000 kg(8820 lbs) AT 850 kPa(123 psi) COLD LR.L<br>MAX LOAD: DUAL 3350 kg(7385 lbs) AT 850 kPa(123 psi) COLD |
| 2  | REGROOVABLE                                                                                                                                                                         |
| 1  | PLEASE SEE THE TABLE 1 ON THE LEFT                                                                                                                                                  |
|    | UPPER MOLD                                                                                                                                                                          |
|    | LOWER MOLD                                                                                                                                                                          |

|             |            |              |      |        |        |        |
|-------------|------------|--------------|------|--------|--------|--------|
| 315/80R22.5 | 156/150    | L            | TL   | 1076   | 312    | 228.5  |
| TYRE SIZE   | LOAD INDEX | SPEED SYMBOL | TYPE | A (mm) | B (mm) | C (mm) |

Approve by:

Check by:

Draft by: