




Welcome to BLI & LCI World




BLI Blue Light Imaging

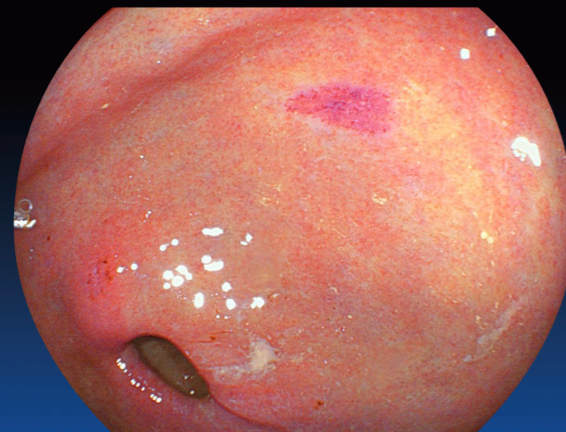

LCI Linked Color Imaging





- Superior Diagnosis
- Superior Usability

Superior Diagnosis

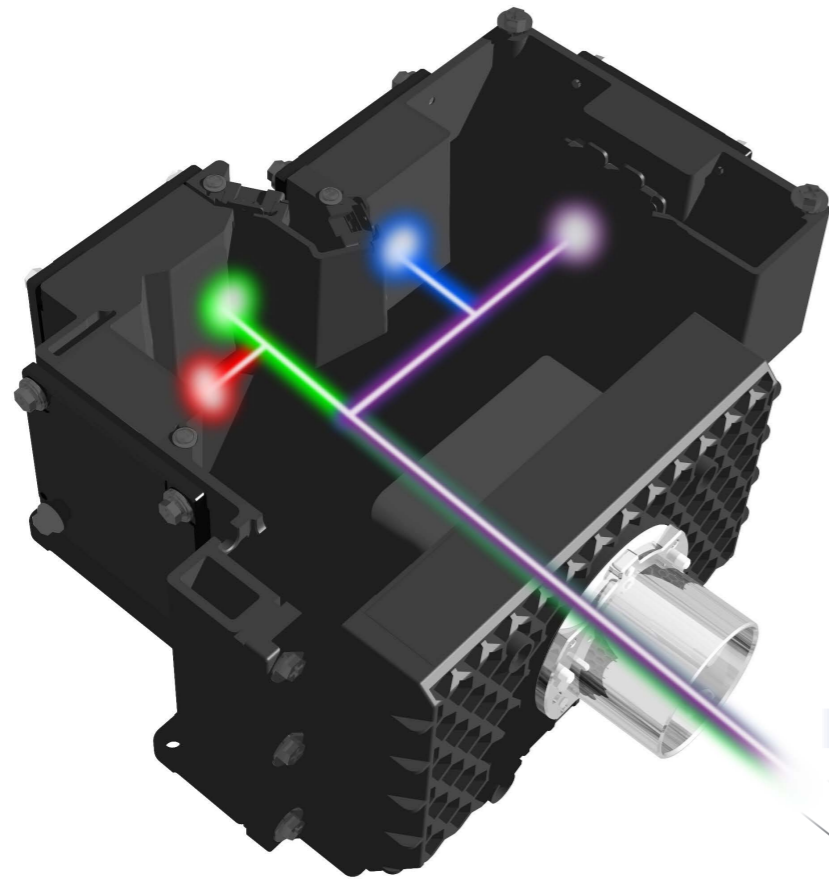

Multi-Light Technology

High-intensity LED lights are controlled independently with high accuracy. Blue LED creates short wavelength light, Red/Green/Blue LED are combined as white light. Short wavelength light and white light are invented on 7000 system.

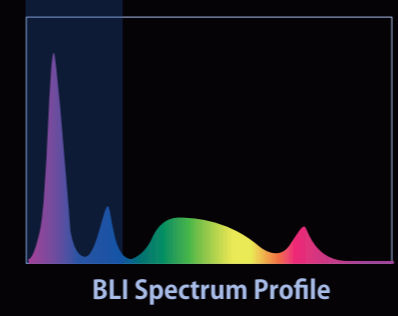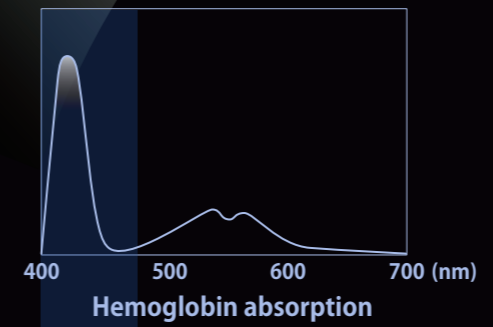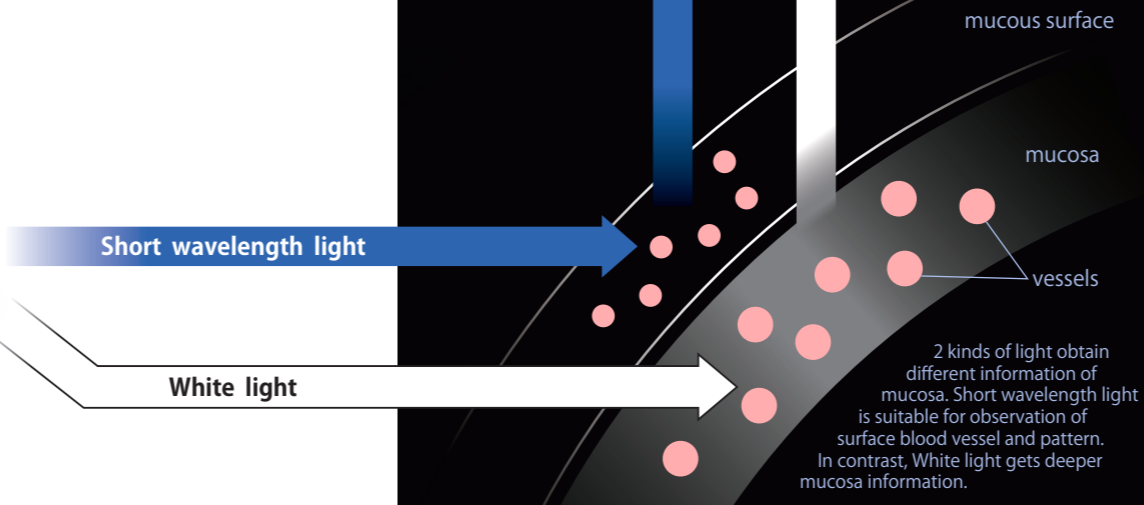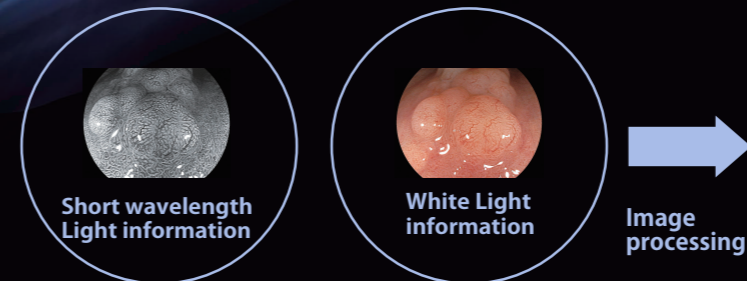


Short wavelength light around 410 nm is strongly absorbed by hemoglobin.

White Light


BLI

LCI

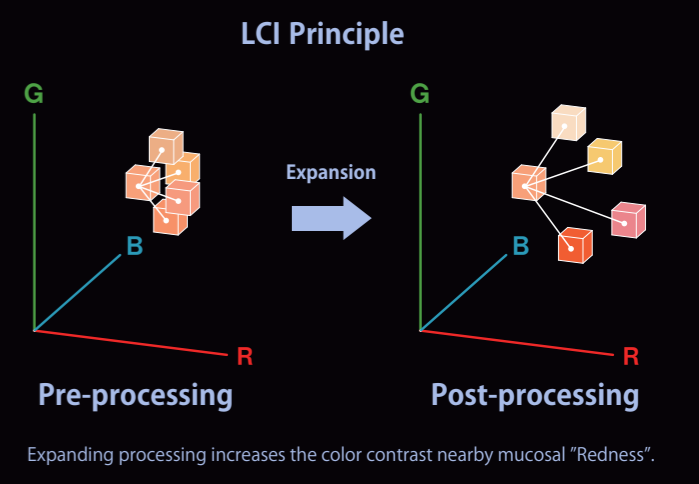


1 BLI (Blue Light Imaging) 

Colon

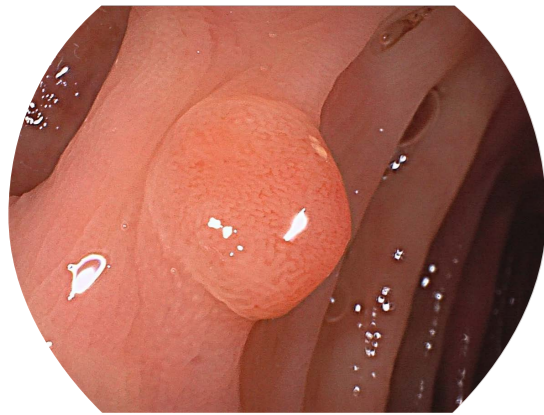


White Light mode

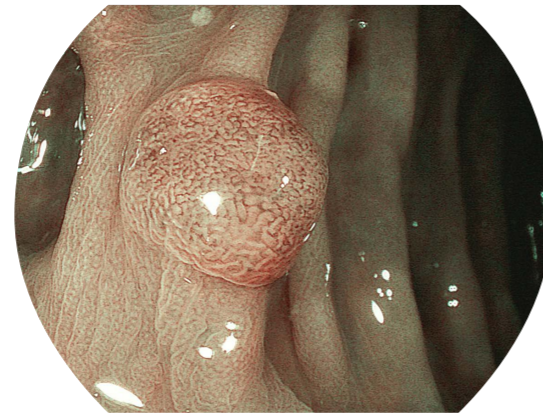

BLI mode

Esophagus

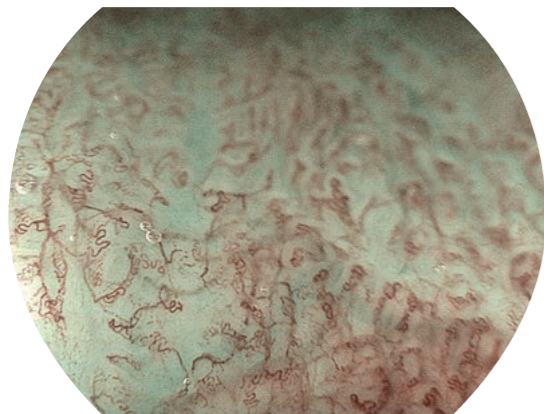

BLI mode

Colon



BLI mode

High contrast images suitable for observing microvascular and microsurface pattern are provided. Magnifying endoscopy is excellent with BLI.

2 LCI (Linked Color Imaging) 

Stomach




White Light mode




LCI mode

Esophagus

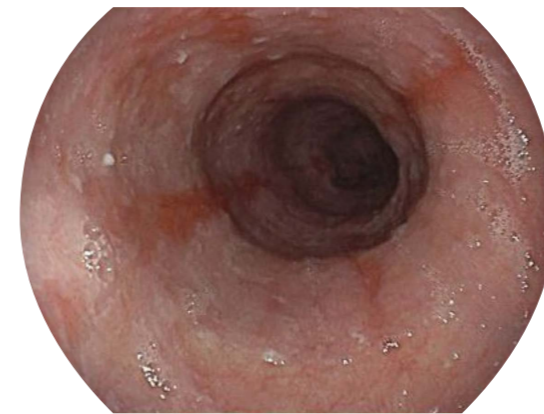

White Light mode

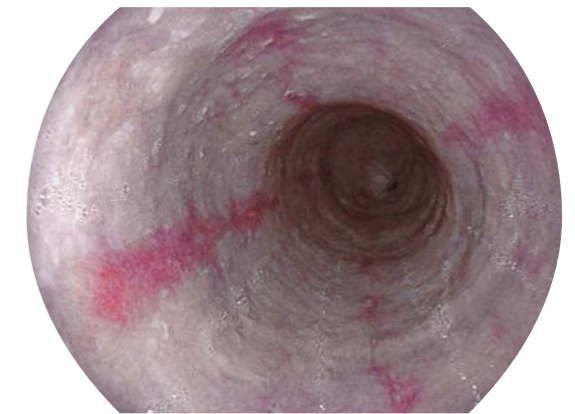


LCI mode

LCI would be helpful for detection with surface pattern and vessels. Slight color difference is visualized with natural tone, using "Red" component.


White Light

Esophagus

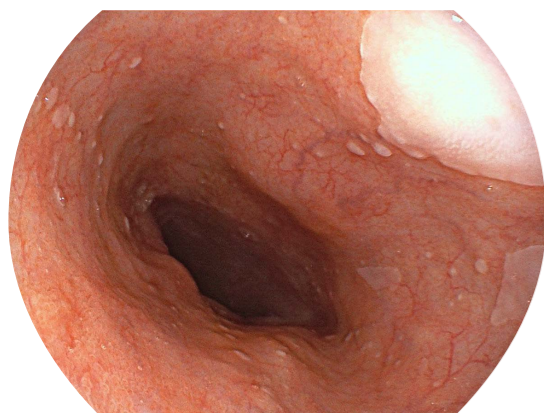

White Light mode


Stomach

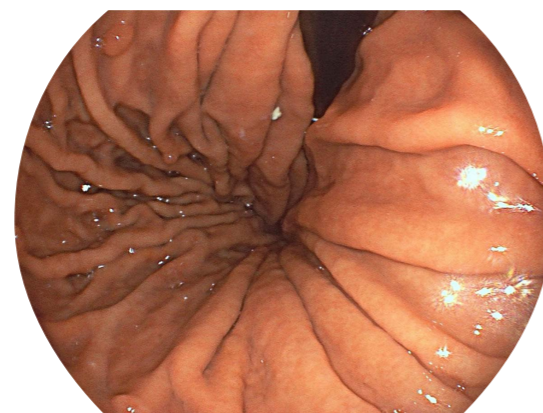

White Light mode

Bright, sharp, and stereoscopic images are accomplished with similar color tones to Xenon light source. Mega-pixel CMOS enables high-definition and quite low-level noise compatible.

Observation modes can be switched by scope button.

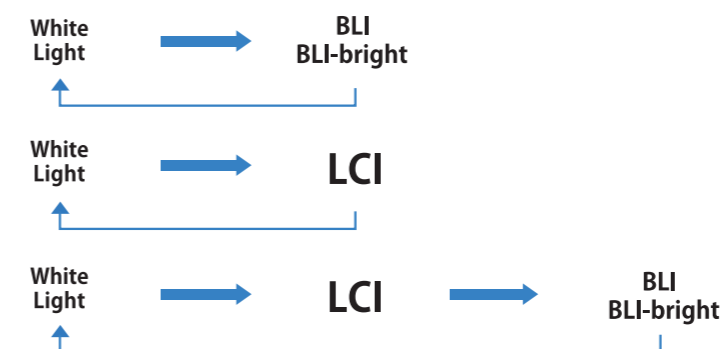


Scope button "2" enables observation modes to be switched in the default setting.






3 Wide 170° field of view

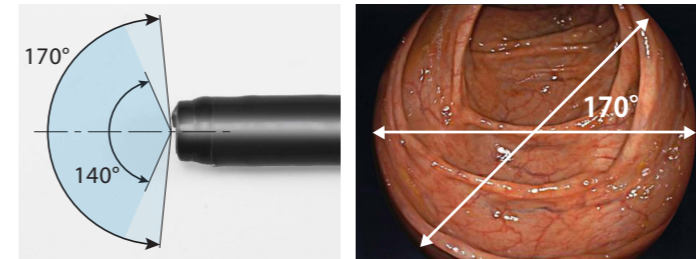

Wide 170° field of view is available with EC-760R-V. Even areas that are hard to observe such as the reverse side of folds could be observed and approached smoothly.

4 Megapixel CMOS + HDTV output

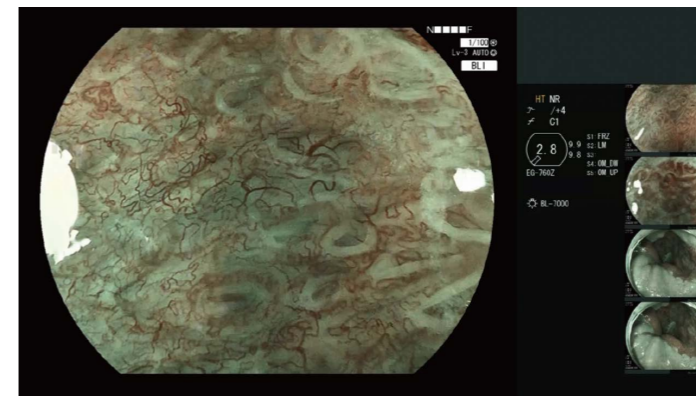

Full HD display

High-definition images with quite low noise level are established by Megapixel CMOS sensor. It allows superior visualization for Full HD display.

5 Multi Zoom


Zoom function

Magnification Mode		Normal	Low	Middle	High	Maximum (x145*)
Step zoom	2 Step	[Progress bar from Normal to Low]				
	3 Step	[Progress bar from Normal to Middle]				
	5 Step	[Progress bar from Normal to Maximum]				


*When using a 26 inch HD LCD monitor

Multi Zoom function are equipped on EG-760Z / EC-760ZP-V. With Continuous mode, Step Zoom mode of "2 Step", "3 Step" and "5 Step" are available. In this modes, images can be magnified in stages by simple press of button.


Switches for zoom in/out



Magnification Images

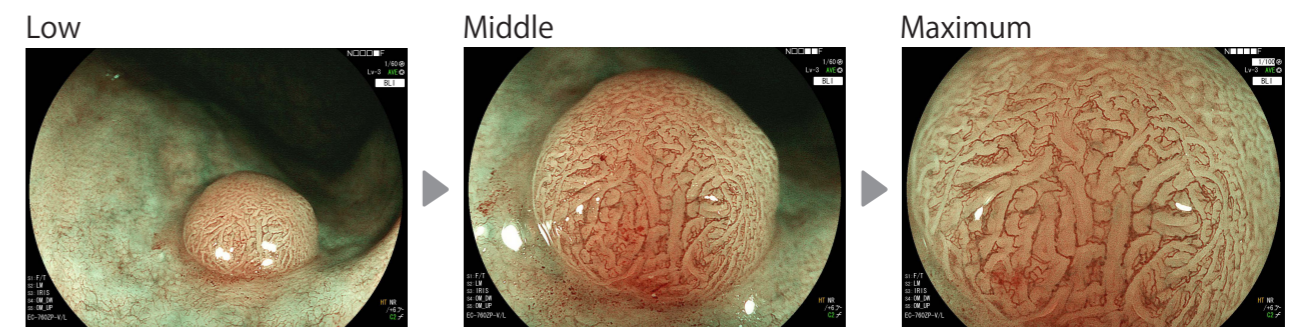

Superior Usability

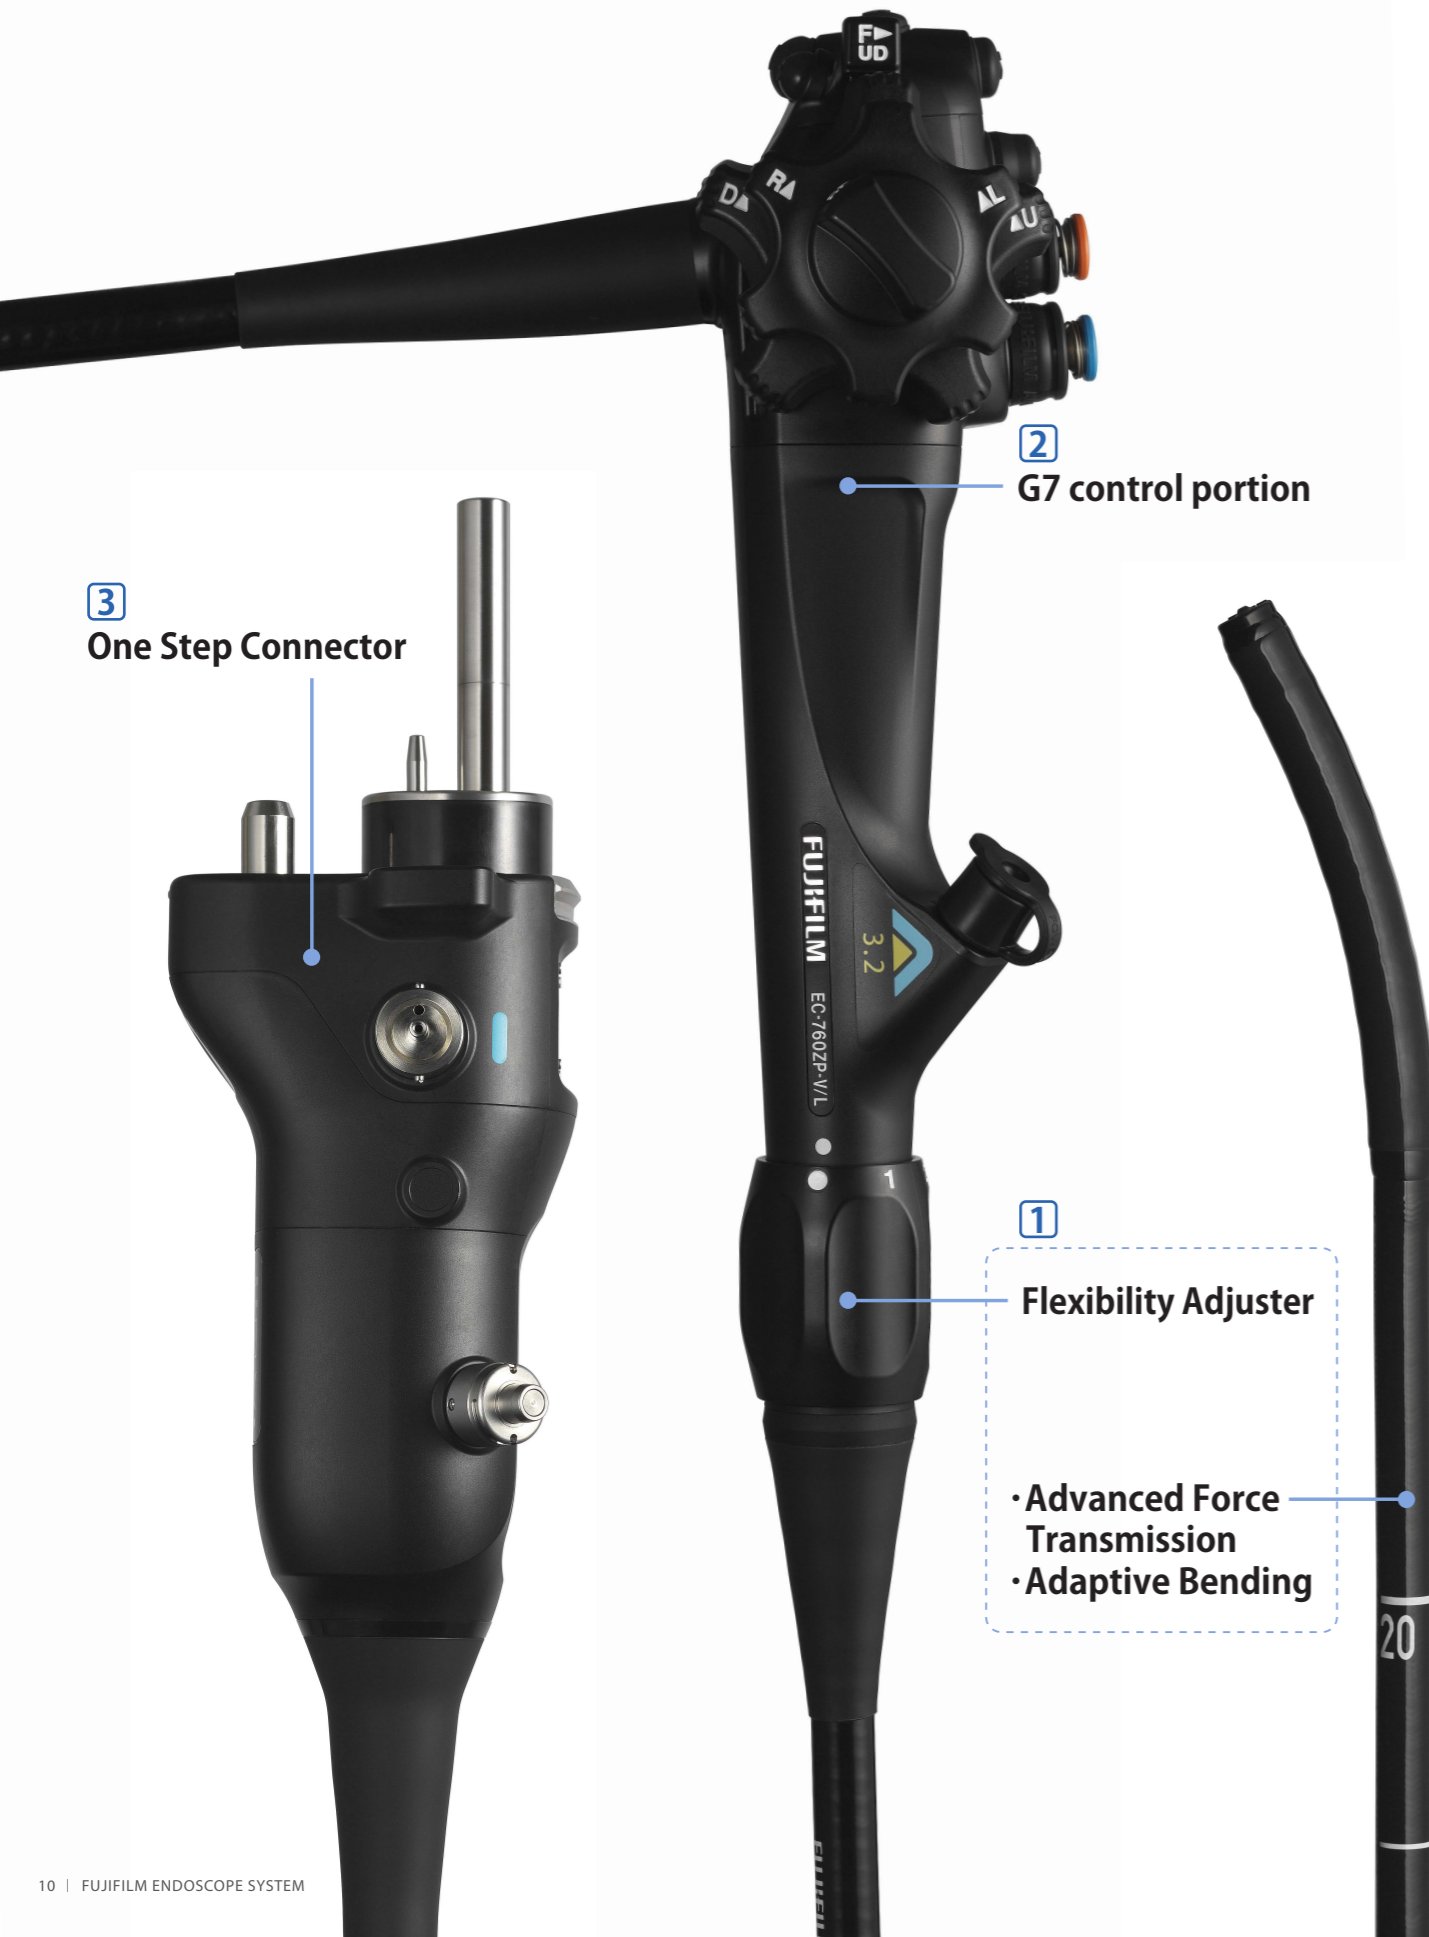

1 Flexibility Adjuster




● 1 2 3
flexible rigid
Index on flexibility adjustment ring




Flexibility Adjuster is equipped on EC-760R-V and EC-760ZP-V. The flexibility of insertion tube can be adjusted with adjustment ring.

Advanced Force Transmission

The flexible portion is designed to transmit operator's movements, pushing, pulling and rotating, to the distal end of endoscope.

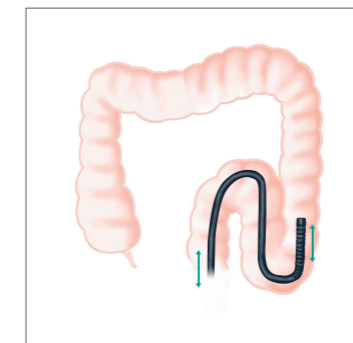


Passing the sigmoid colon

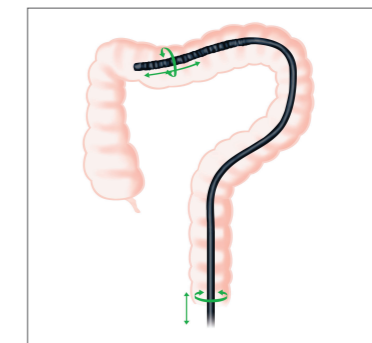


In deep insertion

Adaptive Bending

The end of flexible portion is soft, allowing the scope to bend with the angulations. Flexible portion is elastic, and easy to return to its straight shape after passing through angulations.




Passing the angulations

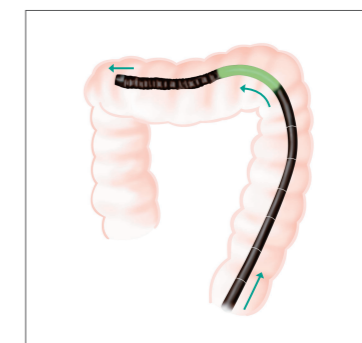

After passing through angulations

2 G7 control portion

G7 control portion is developed from ergonomics point of view. Scope has a rounded surface to fit the hand, and button layout makes intuitive operation possible.

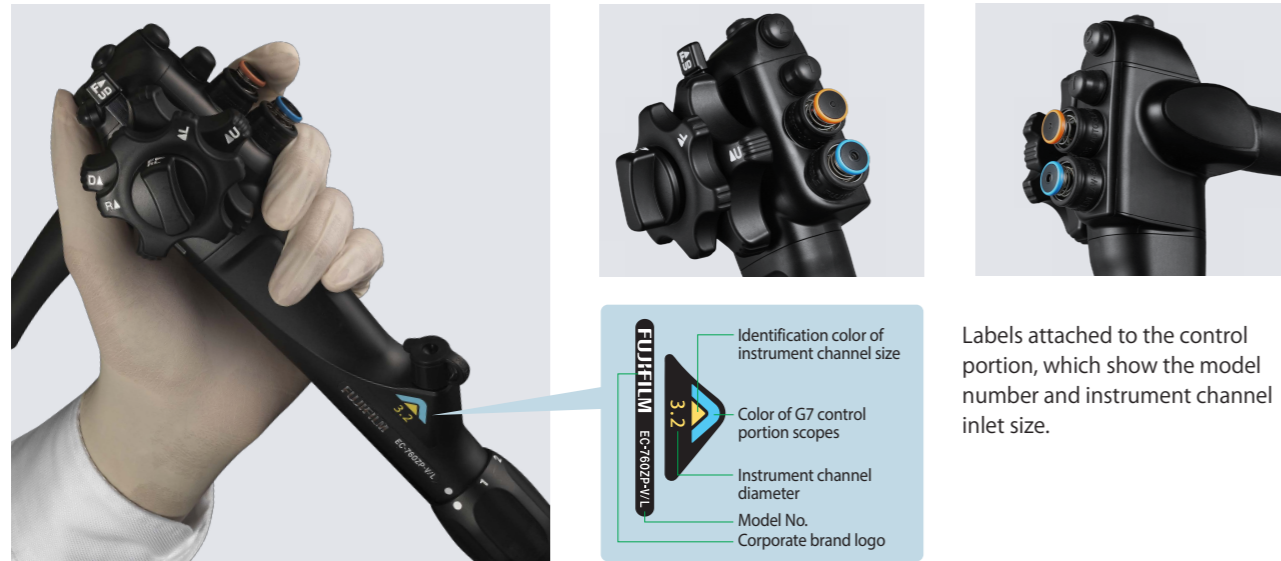

Labels attached to the control portion, which show the model number and instrument channel inlet size.

3 One Step Connector with Contact-free Technology




Scopes can be connected to light source in just 1 step operation. Scope cable connection is no longer required in setting up. One Step Connector enhances efficiency of clinical workflow.

Contact-free Technology

This's the generic name of below 3 points. It means connectors do not need to touch to transmit power and image data. By this technology, durability and reliability of scopes is expected to improve.

- ▶ Power feed: Wireless electrical supply - *a
- ▶ Image transmission: High speed optical laser - *b
- ▶ Remote signal: infrared [IR] LED - *c

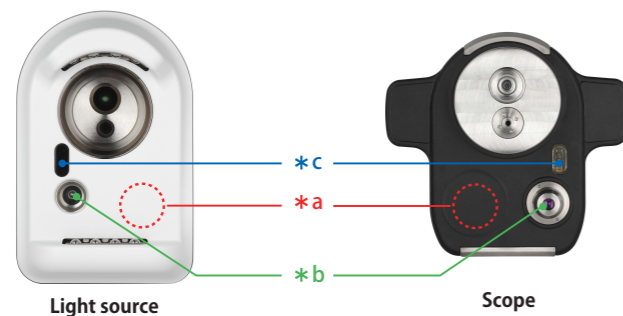

4 Wide compatibility to conventional endoscope

Compatible with 700 series, 600 / 500 series endoscopes.



700 Series

&



Conventional 600 / 500 Series


	BLI	BLI-bright	LCI	WLI	FICE
700 Series	○	○	○	○	○
600 / 500 Series	×	×	×	○	○

600/500 endoscopes can be used with White light and FICE mode.
* FICE : Flexible spectral Imaging Color Enhancement

5 Low-energy, long-lasting and bright light source

When compared to standard xenon light sources, the LED light source* consumes about a third of the energy and lasts longer. Life time of the 4 LED light is expected for 6 years based on Fujifilm evaluation condition. Intensity of BL-7000 qualifies that of 300W Xenon lamp.

*The warranty period is 1 year after date of purchase.

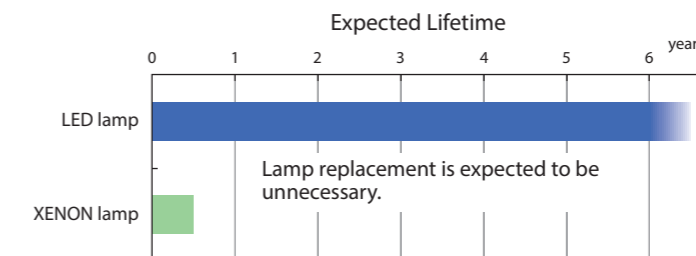

Specification


Upper G.I. tract scopes

EG-760R




Field of view	140°
Viewing direction	0° (Forward)
Observation range	2~100 mm
Bending capability	UP: 210° DOWN: 90° RIGHT: 100° LEFT: 100°
Working length	1,100 mm
Total length	1,400 mm
Distal end diameter	9.2 mm
Flexible portion diameter	9.3 mm
Minimum instrument channel diameter	2.8 mm
Image size	Super image

Product name: Video Endoscope GMDN: 38805
Generic name: Flexible video gastroduodenoscope




EG-760Z



Field of view	Normal: 140° Close: 56°
Viewing direction	0° (Forward)
Observation range	1.5~100 mm Normal: 3~100 mm Close: 1.5~2.5 mm
Bending capability	UP: 210° DOWN: 90° RIGHT: 100° LEFT: 100°
Working length	1,100 mm
Total length	1,400 mm
Distal end diameter	9.9 mm
Flexible portion diameter	9.8 mm
Minimum instrument channel diameter	2.8 mm
Image size	Super image

Product name: Video Endoscope GMDN: 38805
Generic name: Flexible video gastroduodenoscope




Lower G.I. tract scopes

EC-760R-V/M, I, L




Field of view	170°
Viewing direction	0° (Forward)
Observation range	2~100 mm
Bending capability	UP: 180° DOWN: 180° RIGHT: 160° LEFT: 160°
Working length	1,330 mm (M) / 1,520 mm (I) / 1,690 mm (L)
Total length	1,650 mm (M) / 1,840 mm (I) / 2,010 mm (L)
Distal end diameter	12.0 mm
Flexible portion diameter	12.0 mm
Minimum instrument channel diameter	3.8 mm
Image size	Super image
Flexibility Adjustment	Available

Product name: Video Endoscope GMDN: 36117
Generic name: Flexible video colonoscope




EC-760ZP-V/M, L



Field of view	Normal: 140° Close: 56°
Viewing direction	0° (Forward)
Observation range	1.5~100 mm Normal: 3~100 mm Close: 1.5~2.5 mm
Bending capability	UP: 180° DOWN: 180° RIGHT: 160° LEFT: 160°
Working length	1,330 mm (M) / 1,690 mm (L)
Total length	1,650 mm (M) / 2,010 mm (L)
Distal end diameter	11.7 mm
Flexible portion diameter	11.8 mm
Minimum instrument channel diameter	3.2 mm
Image size	Super image
Flexibility Adjustment	Available

Product name: Video Endoscope GMDN: 36117
Generic name: Flexible video colonoscope



PROCESSOR CHARACTERISTICS

Power rating	Voltage	100 to 240 V ± 10 %
	Frequency	50/60 Hz
Dimensions (WxHxD)	Current consumption	0.8-0.5 A
	Weight	390x110x485 mm (incl. projection)
Weight	Type of color	NTSC/PAL
	Digital HDTV	15.0 Kg
Analog/Digital HDTV	Digital HDTV	HD-SDI: 2, DVI-D: 2
	Analog SDTV	DVI: 1
Screen resolution	Analog SDTV	RGB TV: 1, S VIDEO: 1(Y/C), VIDEO: 1
	Screen resolution	SXGA (Default), Full HD
Color adjustment	Brightness, Red, Green, Blue, Red tone, Chroma in nine levels (-4 to +4).	
	Contrast	Contrast in five levels (-1 to +4).
Iris mode	Available in three levels (-1 to +1).	
	Iris mode	Function to control the screen brightness. AVE (controls brightness in general), PEAK (controls brightness in highlight areas), AUTO (sets average or peak iris automatically)
Structure emphasis	Structure emphasis	Function to adjust the sharpness of the subject structure. SE (Structure Emphasis) 4 level, DH (fine section) -4~+9, DL (structure section) -4~+9.
	Tone	Function to emphasize slight differences between colors by emphasizing the degree of vividness of color. ON/OFF.
Enlargement of the image	Enlargement of the image	Function to enlarge the endoscopic image.
	Special light observation mode	BLI, BLI-bright, LCI
FICE	FICE	Ten settings available.
	Mask types	Type 1, Type 2, Type 2/Dual Mode.
Freeze mode	Freeze mode	Function to freeze the endoscopic images.
	Peak detection	Function to obtain the highest contrast image.
Shutter speed	Shutter speed	Normal 1/60-1/200, High 1/100-1/400, High (zoom scope) 1/100-1/800
	Assignment of switches	Scope Switch (1-5), Multi buttons on the front panel (1, 2), Foot Switch (1, 2), *1
Other functions	Other functions	Electronic Zoom, PoP Function, Network function, Dual Mode function.
	Applicable endoscope	700/ 600/ 500 series endoscope
Remote control	Remote control	Fujifilm specified peripherals can be controlled.
	Patient information	Patient ID, Patient Name, Sex, Age, Date of Birth, Comments, Hospital name, Doctor name *2
Other information	Other information	Timer, Laptime
	Recording status	Digital printer status, shooting counter, number of recordable images in internal storage device
Image quality setting status	Image quality setting status	Structure emphasis, Tone, Electronic Zoom Ratio, IEE observation modes, Focus Indicator.
	Image compression rate	TIFF: no compression, JPEG: approx. 1/5, 1/10, 1/20
Number of recordable images in internal storage device	Number of recordable images in internal storage device	TIFF: 840, JPEG 1/20: 21,690, JPEG 1/10: 16,270, JPEG 1/5: 5,910 *3
	Recommended external storage device	Swissbit SFU-22048 E1BP2TO-I-MS-111-STD or SFU22048E3BP2TO-I-MS-121-STD *4
Searching and displaying images	Searching and displaying images	Search screen: Inspection No., Patient ID, Date of Inspection. Display: List, Thumbnail, Enlargement.
	Doctors' name	Up to 20 doctors' names.
Setting by doctor	Setting by doctor	The information such as color tone, iris mode, contrast, brightness, IEE observation modes are kept by setting the doctor's name.
	Clinical procedure	Up to 20 procedures.
When using lithium battery	Memory backup	When using lithium battery
	Control connector	6 years (based on FUJIFILM criteria)
Type of protection against electric shock	Control connector	Light source: 1, Remote: 2, Peripherals: 2, Keyboard: 1, Card reader: 1, Digital printer: 1, Footswitch: 1, Network: 1.
	Degree of protection against electric shock	Type of protection against electric shock
Degree of explosion protection	Degree of explosion protection	Class I equipment
	Degree of explosion protection	Type BF applied part
Prohibited in oxygen-rich environment/flammable gas atmosphere.	Degree of explosion protection	Prohibited in oxygen-rich environment/flammable gas atmosphere.

LIGHT SOURCE CHARACTERISTICS

Illumination source	Illumination source	LED, qualifies 300W Xenon lamp intensity
	Durability of LED	6 years (based on FUJIFILM criteria)
Switching regulator	Lighting system	Switching regulator
	LED Auto power control	Light control method
Forced air cooling	Light cooling method	LED Auto power control
	BLI, BLI-bright, LCI	Special light observation mode
1400 lm (based on FUJIFILM criteria)	Maximum light output	1400 lm (based on FUJIFILM criteria)
	65 kPa	Maximum air supply pressure
Brightness is automatically adjusted according to the video output (manually possible).	Automatic brightness adjustment method	Automatic brightness adjustment method
	Diaphragm method pump	Air supply
HI/MID/LOW/OFF	Air supply pump	HI/MID/LOW/OFF
	Method	Water supply
Feeds water by pressurizing the detachable water container with air.	Transmitted illumination	The light flashes with the maximum light intensity. Used to check the position of the distal end from outside the body.
	Light limitation	Indicators on front panel
To avoid the blood of a bleeding patient becoming clotted by the illuminating light. Used to limit the maximum light intensity.	Illumination mode	OFF/1/2/3. Observation modes can be switched by pressing the illumination mode button.
	Set values are maintained even after turning off the system.	Memory of set value
Class I equipment	Type of protection against electric shock	Type of protection against electric shock
	Type BF applied part	Degree of protection against electric shock
Prohibited in oxygen-rich environment/flammable gas atmosphere.	Degree of explosion protection	Degree of explosion protection

Product name: Light source GMDN: 35158
Generic name: Endoscopic light source, line-powered

New Accessories (Valve, Tank)

For routine examination



Air / Water Valve AW-603



Suction Valve SB-605



Water Tank WT-603

Used with CO₂ Regulator "GW-100"



Air / Water Valve AW-604G



Water Tank WT-604G