

## DS-UPS3000 UPS



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection
- USB port for remote control
- LCD display



## ▪ Specification


| <b>Power</b>          |   |
|-----------------------|---|
| UPS Capacity          | 3000 VA / 1800 W  |
| <b>Input</b>          |   |
| Input Voltage Range   | 140 VAC to 290 VAC  |
| Input Frequency       | 50/60 Hz self-adaptive  |
| Plug Type             | Schuko  |
| <b>Output</b>         |   |
| Output Voltage Range  | 210 VAC to 235 VAC  |
| Output Frequency      | 50/60 Hz ± 0.5 Hz self-adaptive   |
| Transfer Time         | ≤ 10 ms   |
| Waveform              | PWM   |
| Outlet Type           | Universal   |
| Outlet Number         | 4   |
| <b>Battery</b>        |   |
| Battery Type          | 12 V/9 Ah *4 pcs, lead-acid battery   |
| Recharge Time         | 6-8 hours recover to 90% capacity   |
| Typical Backup Time   | Run time at 100w: 150 min<br>Run time at 600w: 15 min<br>Run time at 900w: 6 min  |
| <b>Interface</b>      |   |
| Communicate Ports     | USB   |
| <b>Protection</b>     |   |
| Full Protection       | Surge protection, Overload protection, Discharge protection, Short circuit protection   |
| <b>Indicator</b>      |   |
| Display               | LCD Screen<br>Input Voltage, Output Voltage, Battery capacity, load level   |
| Alarm                 | Charging Mode (DC mode): Sounding every 8 seconds<br>Low Battery: Sounding every second<br>Overloading Mode: Sounding every 0.5 seconds<br>Fault: Continuously sounding |
| <b>General</b>        |   |
| Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F)   |
| Operating Humidity    | 30% to 90% (non-condensing)   |
| Dimension             | 412 mm × 145 mm × 210 mm (16.22" × 5.71" × 8.27")   |
| Weight                | Approx. 18.5 kg (40.8 lb)   |

## ▪ Available Model

DS-UPS3000

▪ Dimension

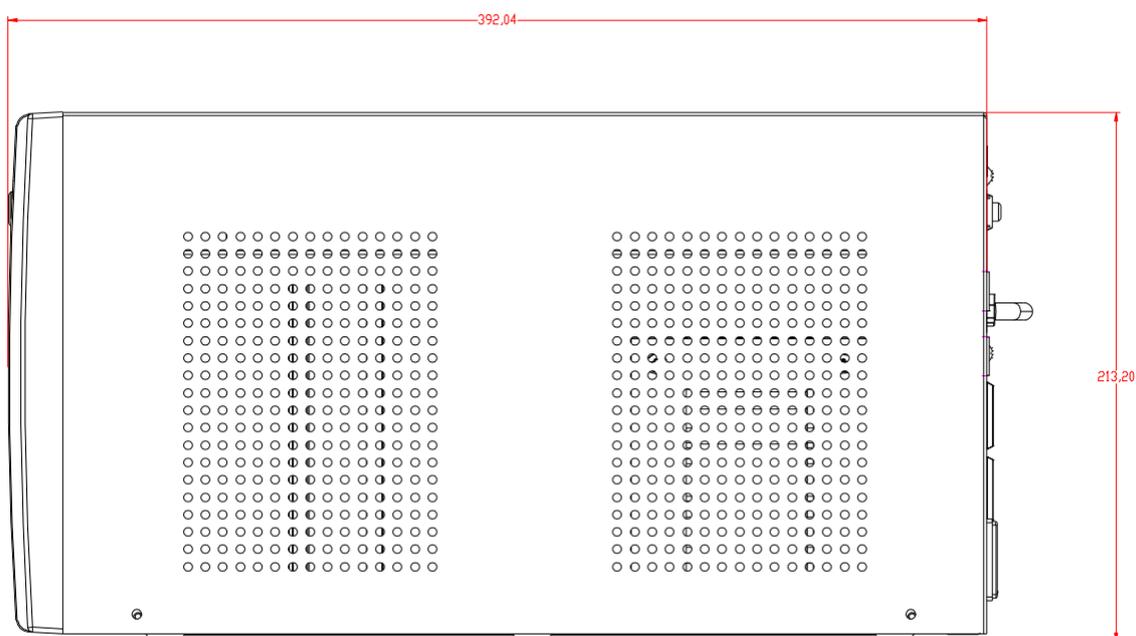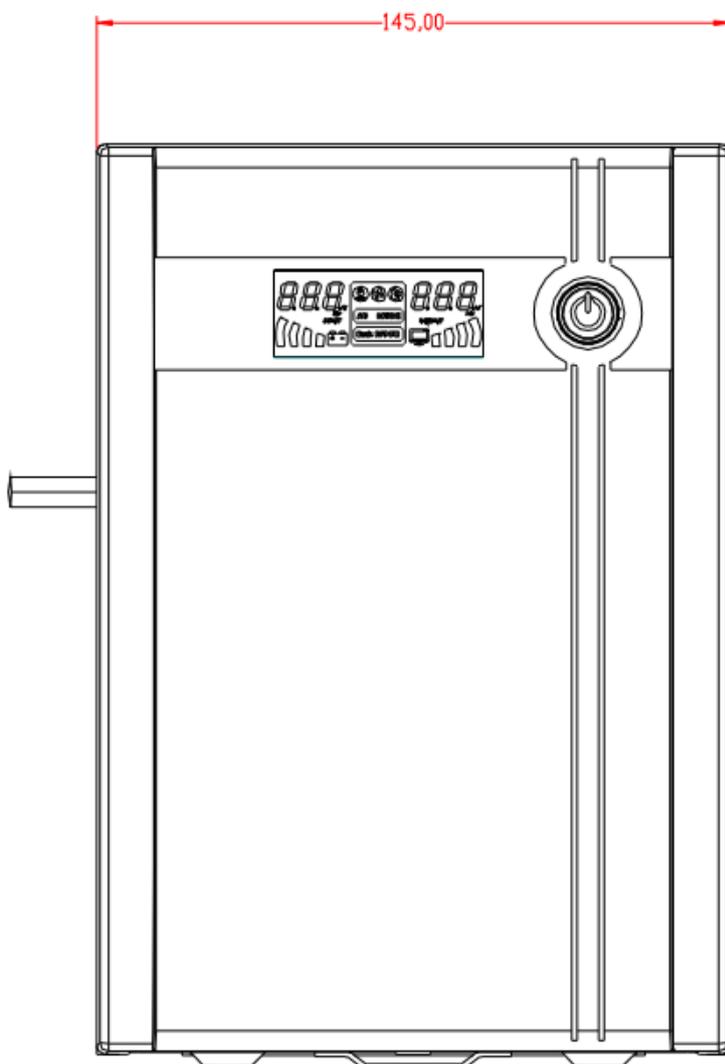

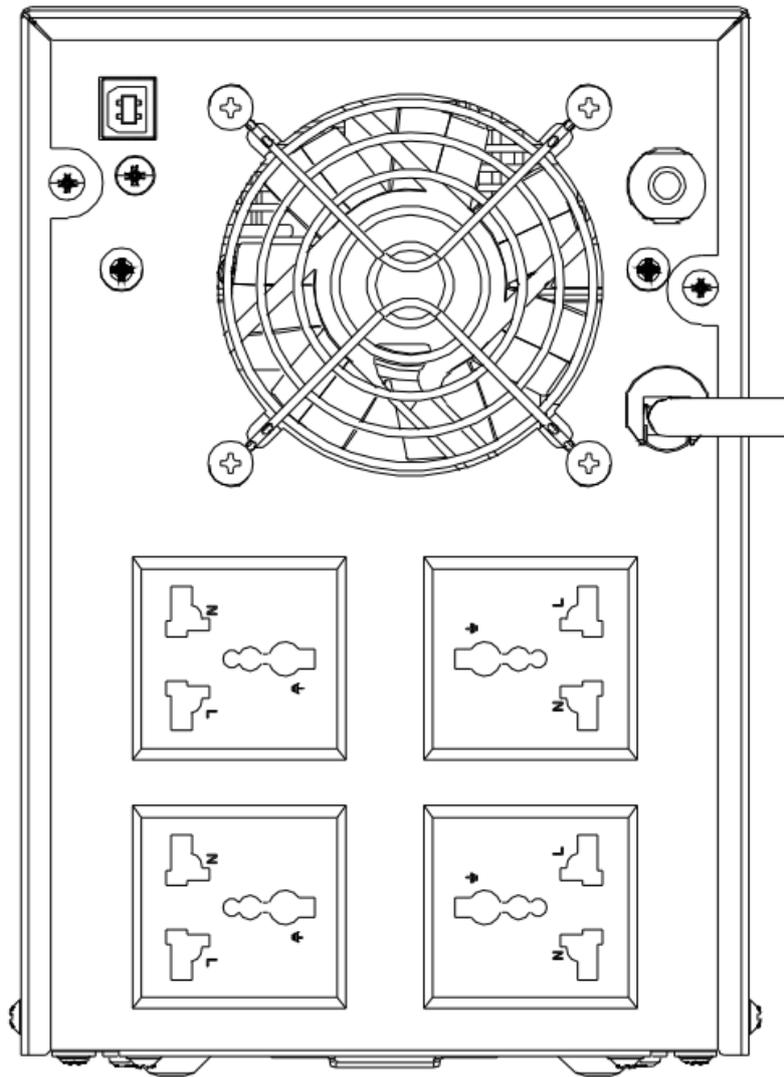

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

