



RDW

Vehicle Technology Division



THE NETHERLANDS
(N E D E R L A N D)



COMMUNICATION

Concerning ⁽¹⁾ :

- ~~- approval granted~~
- approval extended
- ~~- approval refused~~
- ~~- approval withdrawn~~
- ~~- production definitely discontinued~~

of a type of tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4-30R-0287184

Extension number: 01

- | | |
|--|--|
| 1. Manufacturer's name and address | : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany |
| 2. Tyre type designation ⁽²⁾ | |
| 2.1 Brand-name(s)/trademark(s) | : GISLAVED
<u>CONTINENTAL</u> |
| 2.2 Trade description(s)/Commercial name(s) | : GISLAVED, SOFT*FROST 200
<u>CONTINENTAL, VikingContact 7</u> |
| 3. If applicable, name and address of the manufacturer's representative | : not applicable |
| 4. Summarized description | |
| 4.1 Tyre size designation | : 215/60 R 16 |
| 4.2 Category of use | : normal /snow / special use / temporary use ⁽¹⁾ |
| 4.3 Structure | : diagonal /bias belted/ radial/ run-flat tyre ⁽¹⁾ |
| 4.4 Speed category symbol | : T |
| 4.5 Load-capacity index | : 99 |
| 5. Technical Service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity | : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany |
| 6. Date of report issued by that service | : 18.04.2016, 02.05.2016 |
| 7. Number of report issued by that service | : 4716725, 4716726 |
| 8. Reason(s) of extension (if applicable) | : Tyre Type Designation added |
| 9. Any remarks | : Reinforced/Extra Load |



Approval number: E4-30R-0287184

Extension number: 01

10. Place : Zoetermeer
11. Date : 12-OCT-2017
12. Signature :

T. Ploshchansky

The image shows a blue ink signature of T. Ploshchansky over a circular official stamp. The stamp features the Dutch coat of arms with the motto 'JE M'ENTENDRAI' and the letters 'RDW' at the bottom.

13. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.

- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.


-
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
- The test report as mentioned in item 7.

(1) Strike out what does not apply.

(2) A list of Brand name(s)/trademark(s) or Trade description(s)/ Commercial name(s) may be annexed to this communication





The drawing may contain more position numbers than required by UNECE type approval.

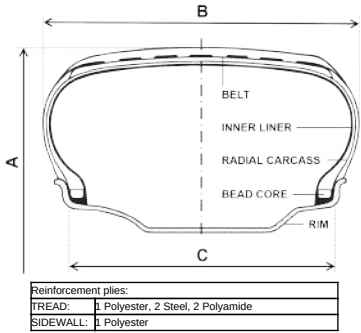


										Design Dimensions (calculated /Annex-5)		
Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content	Overall diameter	A (mm)	664
1/194	Brand Name (Trade mark)		both	CONTINENTAL	116	"Inside"/"Outside" marking		SS	OUTSIDE	Section Width	B (mm)	221
2 or 3	Trade description (Commercial name)		both	VikingContact 7	117	"Inside"/"Outside" marking		OSS	INSIDE	Measuring rim	C (Rim Code)	6.5Jx16
4	Tire size designation	>6 (or 9	both	215/60 R 16	134	Date of manufacturing	>4 mm	SS	[WWYY]			
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#			
7 or 8	Service description (LI / SSY)	>6 mm	both	99 T	184	Runflat Symbol		both	-			
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-	Approval No.	E4-30R-0287184	
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S	135	UN approval mark	>12 mm	both	E4	Extension:	01	
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	0287184	Name:	D. Schoenfelder	
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD						Drawing No.:	1	
19	PSI index	>2 mm	both	-	If Pos 78 is used	Tread depth		-	-	Date:	10/5/17 4:51 PM	
27	Regroovability		both	-		Surface void/ fill ratio		-	-	Pattern	9999.99	
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-	If Pos 79 is used	Number of circumferential ribs		-	-			
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-		Number of block-like elements		-	-			
78	Mark for special use tires	>4 mm	both	-		Depth of lateral grooves/sipes >=50%of main groove depth?		-	-			
79	"TRACTION"	>4mm	both	-								





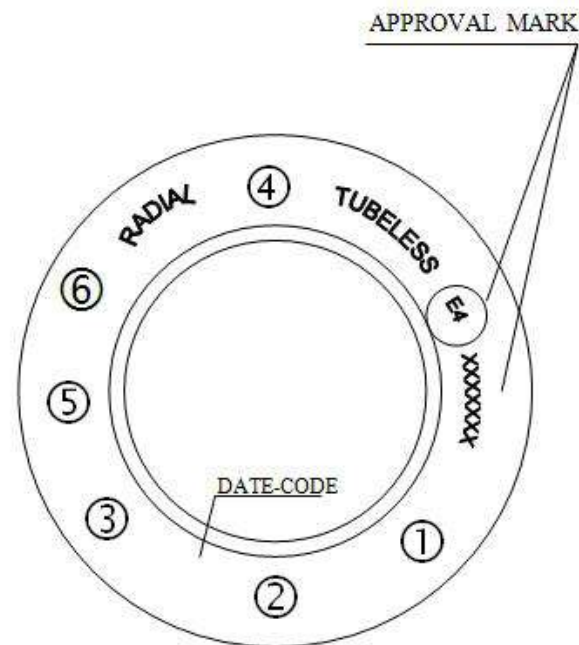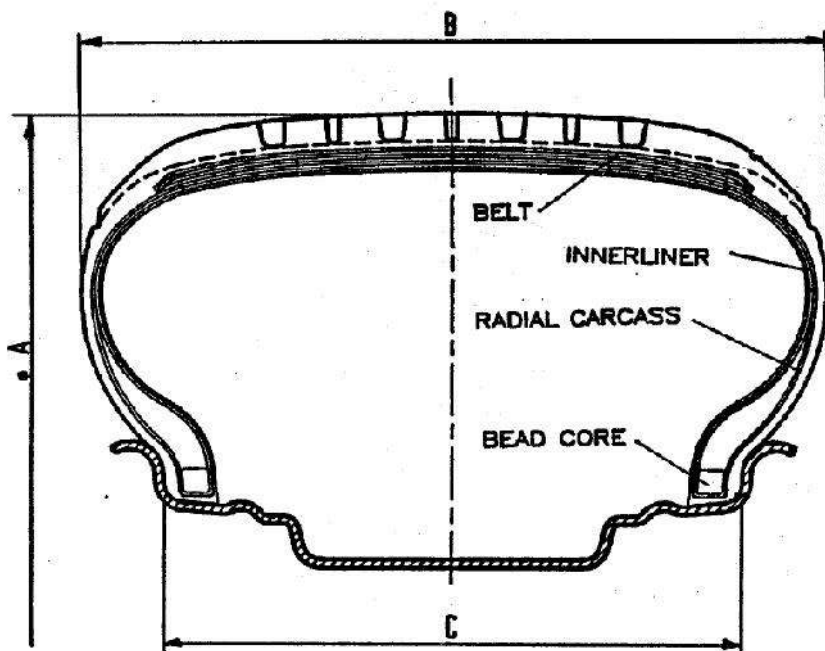

1st Sidewall

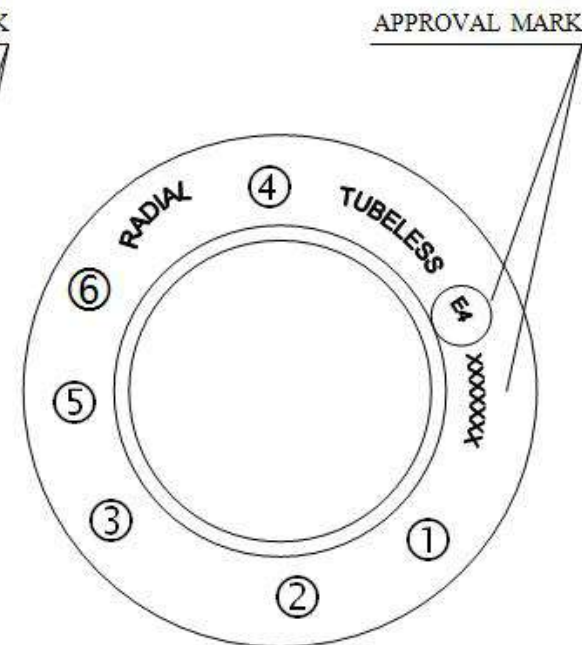

2nd Sidewall

3119.02



6 T	3 215/60 R 16 Reinforced/Extra Load	5 99	TT TL	664	221	6.5Jx16	
SS	Category of use marking (if applicable) M+S	LI	Tyre Type	A mm	B mm	C Rim Code	Remarks
Brand name 1 GISLAVED				Drawing No. / Remarks : P - 0287184		Checked / Date : 21.07.2015 J. Recknagel	
Tyre type Designation 2 SOFT*FROST 200							