



Seipro Technology Co., Ltd

Add: Floor 1, Building B2, No. 12, Huangcun Sanlian Road, Tianhe District, Guangzhou, China

Website: www.seiprolight.com

Specification of UCS1 Series LED Street Light

Technical specification


Model No.	SP-S80W-UCS1	SP-S100W-UCS1	SP-S120W-UCS1	SP-S200W-UCS1
Power	80W	100W	120W	200W
LED Chip Brand	CREE	CREE	CREE	CREE
Power Driver Brand	Moso	Moso	Moso	Moso
Color Temperature	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Color-rendering Index	>70	>70	>70	>70
Beam Angle	Type 2, Type 3, Type 4, Type 5			
Input Voltage	AC 220-2240V	AC 220-2240V	AC 220-2240V	AC 220-2240V
Surge Protection	10KV	10KV	10KV	10KV
Power Factor	>0.95	>0.95	>0.95	>0.95
Luminous Efficiency	>180LM/W	>180LM/W	>180LM/W	>180LM/W
Initial Flux	>14, 400LM	>18, 000LM	>21, 600LM	>36, 000LM
Working Environment	-40°C~+50°C	-40°C~+50°C	-40°C~+50°C	-40°C~+50°C
L80B10	>100, 000Hrs	>100, 000Hrs	>100, 000Hrs	>100, 000Hrs
IP Rating	IP66	IP66	IP66	IP66
IK Rating	IK09	IK09	IK09	IK09
Dimmable	Dali & D4i	Dali & D4i	Dali & D4i	Dali & D4i
Fixture Dimension	562*200*108MM	607*240*108MM	607*240*108MM	760*300*108MM
Installation Tube	Φ60MM	Φ60MM	Φ60MM	Φ60MM
Warranty	10 years	10 years	10 years	10 years
Material	Die-cast Aluminum + Tempered Glass			

Zhaga holder is optional.

Installation ways



Horizontal installation

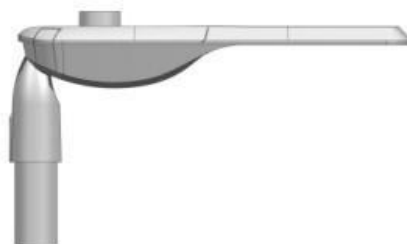

Vertical installation

Product details

