

MAGNETIC MOUNT **WM** LTE ANTENNA

SYSTEMS


Magnetic mount LTE antenna with 7dBi gain and SMA connector

TECHNICAL FEATURES


- Technology: GSM / UMTS / LTE
- Frequency: 700/800/900/1700/1800/1900/2100/2600 MHz
- Impedancy: 50 Ohms
- Polarization: Vertical
- Directivity: Omni directional
- Gain: 7 dBi
- VSWR: < 2.0 : 1
- Max Input power: 10 W
- Beam angle: H 360°, V 30°
- Cable: RG174/U type, 4 meters long
- Connector: SMA male
- Attachment: Magnetic base
- Dimensions: 315 x 39.5 mm / 56gr
- Operating temperature: from -40°C to +85°C




Far-field amplitude of C07+M25-1+Cable-4.5M-E.nsi





Far-field amplitude of C07+M25-1+Cable-4.5M-E.nsi



Far-field amplitude of C07+M25-1+Cable-4.5M-H.nsi



Far-field amplitude of C07+M25-1+Cable-4.5M-H.nsi

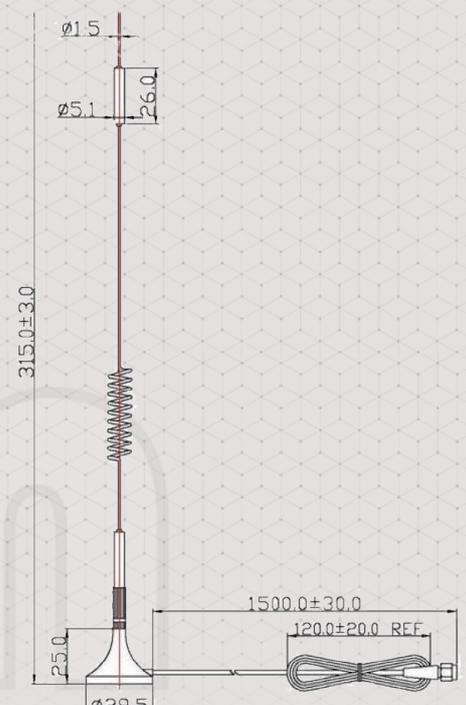

The presented images on the datasheet are for illustration purposes only. The details on the data sheet are for general information purposes only. WM Systems LLC cannot be held liable for erroneous information on the datasheet. The announced information are subject to change without notice. For more details, please contact us.

WM Systems LLC

8 Villa str., Budapest, H-1222 HUNGARY

Phone: +36 (1) 310 7075

Support: +36 (20) 333 1111

Our website: www.wmsystems.hu

Sales inquiry: intersales@wmsystems.hu

Support: support@wmsystems.hu