


Datenblatt

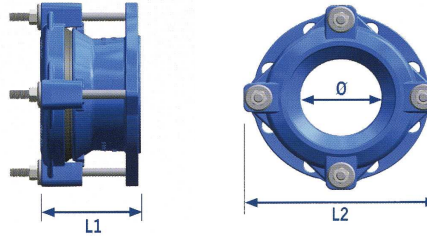

Hegawa FastFit Extra Wide Range Flange adaptors
complete with EPDM gaskets, dacromet coated or
stainless steel bolts and nuts.
Epoxy coated (blue colour) 200 microns

Dimenzija DN	Opseg u mm	Šifra proizvoda	L1 u mm	L2 u mm	Težina kg/kom.
50	60-80	HEG-URCFA-2-S-E	145	190	6,00
60/65	70-90	HEG-URCFA-2,5-S-E	145	200	6,50
80	88-113	HEG-URCFA-3-S-E	150	223	7,50
100	107-132	HEG-URCFA-4-S-E	125	242	7,50
125	133-159	HEG-URCFA-5-S-E	140	269	8,50
150	159-184	HEG-URCFA-6-S-E	175	296	12,00
150/175	165-195	HEG-URCFA-7-S-E	183	317	14,00
200	194-226	HEG-URCFA-8-S-E	183	354	18,00
200	216-246	HEG-URCFA-8A-S-E	183	368	18,00
250	244-276	HEG-URCFA-10-S-E	158	400	21,00
250	266-297	HEG-URCFA-10-S-E	158	419	21,00
300	315-345	HEG-URCFA-12-S-E	158	469	25,50
300	345-375	HEG-URCFA-12A-S-E	200	499	31,50
350	375-405	HEG-URCFA-14-S-E	200	529	34,50
400	400-435	HEG-URCFA-16-S-E	209	565	38,00
400	435-470	HEG-URCFA-16A-S-E	298	600	53,00
450	475-510	HEG-URCFA-18-S-E	298	640	64,00
500	499-534	HEG-URCFA-20-S-E	208	665	59,00
500	530-565	HEG-URCFA-20A-S-E	208	695	59,00
500	575-610	HEG-URCFA-20B-S-E	208	695	59,00
600	610-645	HEG-URCFA-24-S-E	208	775	69,00
600	645-680	HEG-URCFA-24A-S-E	298	810	93,00
700	710-745	HEG-URCFA-28-S-E	220	910	110,00
800	810-845	HEG-URCFA-32-S-E	225	1025	125,00
900	913-949	HEG-URCFA-36-S-E	200	1115	
1000	1016-1052	HEG-URCFA-40-S-E	200	1230	
1100	1108-1133	HEG-URCFA-44-S-E	200	1340	
1100	1142-1167	HEG-URCFA-44A-S-E	200	1340	
1200	1209-1234	HEG-URCFA-48-S-E	200	1455	
1200	1245-1270	HEG-URCFA-48A-S-E	200	1455	
1400	1412-1437	HEG-URCFA-56-S-E	200	1675	
1400	1452-1477	HEG-URCFA-56A-S-E	200	1675	

Material

Middle ring: Nodular cast iron GGG 50 to EN 1514, EN 1563, BS 6920
Epoxy coated
Followers: Nodular cast iron GGG 50 to EN 1514, EN 1563, BS 6920
Epoxy coated

Bolts and nuts

Steel F-114 quality 8.8 to DIN 931, DIN 934, DIN 9021, Dacromet coated

Angle deviation

Minimum 4°

Rubber gaskets

EPDM or NBR

Features

PN 10 or PN 16

Suitable for joining pipes of different rigid materials,

such as cast iron, steel, asbestos cement, stainless steel, PVC, PE (insert required) and so on

Suitable for use with sawage

Temperature range: -5°C-60°C

Hegawa
pipeline products for water and gas