

ML





30 ▶ 70 HP



1400 ▶ 1800



max 35 mm






max 40 mm



Medium



Medium lateral shredder for tractors from 30 to 70 HP, available in sizes 140-160-180. Available with internal gearbox, which ensures greater operational stability.



The gearbox is integrated within the side plate, ensuring a compact and protected configuration. The internal gearbox system provides excellent horizontal and vertical outreach, allowing easy operation along road edges and medium-gradient slopes. Ideal for routine maintenance tasks requiring precision and ease of use.




Universal shaft
(Eurocardan) size 8

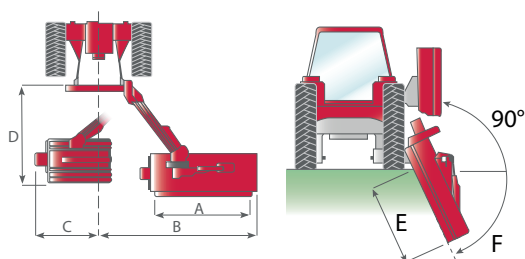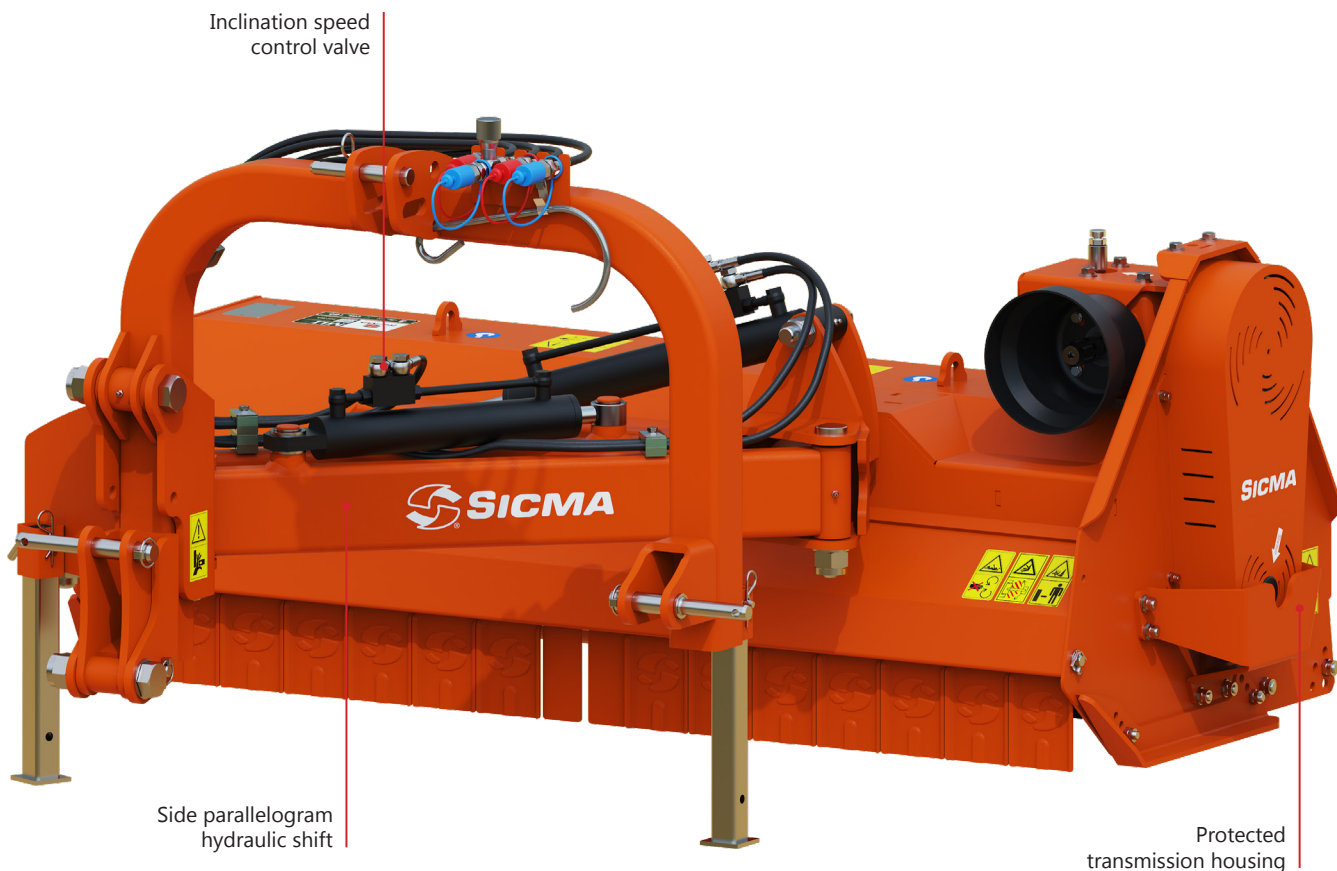


MOD.	A mm (in)	B mm (in)	C mm (in)	D mm (in)	E mm (in)	F °
MLI 140	1410 (55")	2020 (80")	650 (26")	1540 (61")	1050 (41")	55
MLI 160	1560 (61")	2170 (85")	650 (26")	1540 (61")	1200 (47")	55
MLI 180	1860 (73")	2370 (93")	650 (26")	1540 (61")	1400 (55")	50

TECHNICAL DATA









Reducer speed:


540 rpm

 | Ω 2300 rpm



Models and Features:

	 HP	 mm (in)	 mm (in)	 kg (lbs)	 nr.	 nr.	 nr.	 cat.
MLI 140	30 ▶ 70	1400 (55")	1550 (61")	470 (1036)	40	20	3	1/2
MLI 160	30 ▶ 70	1600 (62")	1750 (68")	490 (1080)	44	22	3	1/2
MLI 180	30 ▶ 70	1800 (71")	1950 (76")	515 (1135)	48	24	3	1/2

MLE



30 ▶ 70 HP



1400 ▶ 1800



max 35 mm





max 40 mm



Medium



Medium lateral shredder for tractors from 30 to 70 HP, available in sizes 140-160-180. The version with external gearbox enables a wider lateral reach.



The external gearbox configuration is specifically designed to reach difficult and hard-to-access areas. Thanks to its extended outreach, made possible by the gearbox positioning, it operates more efficiently than other flail mower types.




Universal shaft (Eurocardan)
size 6

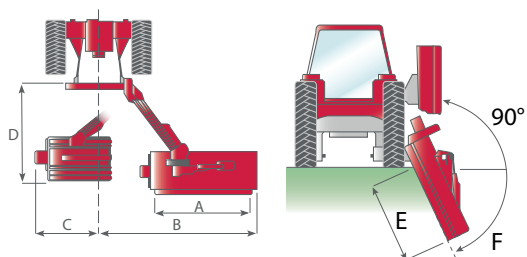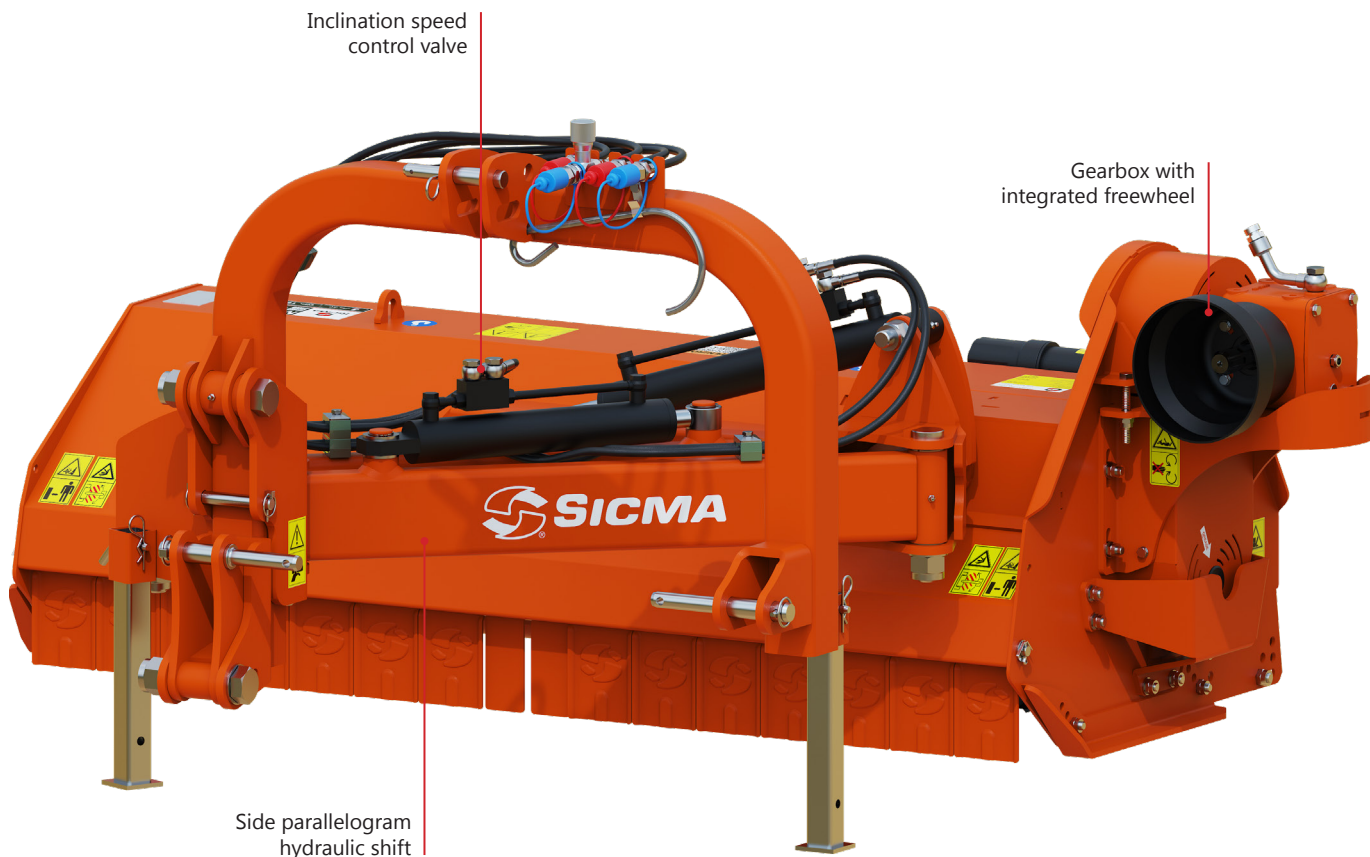


MOD.	A mm (in)	B mm (in)	C mm (in)	D mm (in)	E mm (in)	F °
MLE 140	1410 (55")	2320 (91")	650 (26")	1540 (61")	1200 (47")	55
MLE 160	1560 (61")	2470 (97")	650 (26")	1540 (61")	1350 (53")	55
MLE 180	1860 (73")	2670 (105")	650 (26")	1540 (61")	1550 (61")	60









TECHNICAL DATA

Reducer speed:



540 rpm

 | Ω 2300 rpm

Models and Features:

	 HP	 mm (in)	 mm (in)	 kg (lbs)	 nr.	 nr.	 nr.	 cat.
MLE 140	30 ▶ 70	1400 (55")	1750 (69")	470 (1036)	40	20	3	1/2
MLE 160	30 ▶ 70	1600 (62")	1950 (76")	490 (1080)	44	22	3	1/2
MLE 180	30 ▶ 70	1800 (71")	2150 (84")	515 (1135)	48	24	3	1/2

- Counterblade system in cutting chamber
- Object launch protection blades
- Transmission with V-belts and manual belt tensioner system
- Rotor supports with high reliability bearings equipped with NILOS lubricant seals
- High resistance self-centring pulley shrink discs
- Helical shaft

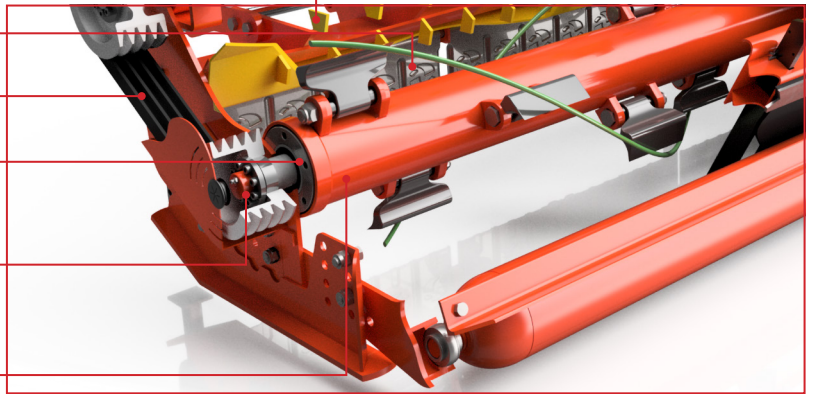

The ML Bank Mower is equipped with an anti-shock system that allows it to follow the contours of the working surfaces, protecting the structure from any damage.



The Antishock system allows the machine to avoid any stones or obstacles during its cutting operation.



The Floating System allows the machine to follow the terrain surface profile during operation.



®

SICMA

*The experience that cultivates
the future of your land*

SICMA S.p.a. is an Italian company and a leader in
the professional agricultural machinery sector.
We design and create cutting-edge solutions for
you, the farmer of tomorrow. Innovation and
passion at your service.



MIGLIANICO | ABRUZZO | ITALY

Sicma SpA

Contrada Cerreto, 39
66010 Miglianico (CH)
Tel. +39 0871 95841

info@sicma.it - www.sicma.it

