


MODEL:

PDUMH32HVATNET

Single-Phase Switched 2U Rackmount ATS PDU



230V Single-Phase
Input/Output



Automatic
Transfer Switch




18 Outlets



7.4kW Load
Capacity



Multi-function
Display



Network
Interface



2U Horizontal
Rackmount





2 IEC-309 Blue
32A Inputs

- A** 20A Double Pole Magnetic Circuit Breakers
- B** Multi-Function Display
- C** Factory Configuration Port
- D** Network Interface
- E** Removable Rackmounting Brackets
- F** Removable Cord Retention Brackets
- G** 10 ft. Input Power Cord (x2)
- H** IEC-309 Blue 32A (2P+E) Input Plug (x2)
- I** Grounding Lug
- J** C13 and C19 Outlets

Also Includes: Owner's manual,
configuration cable and cable ties.

Multi-function display
reports Current, Voltage,
Kilowatts and Temperature/
Humidity*, plus Source A/B
Available and In-Use Status.

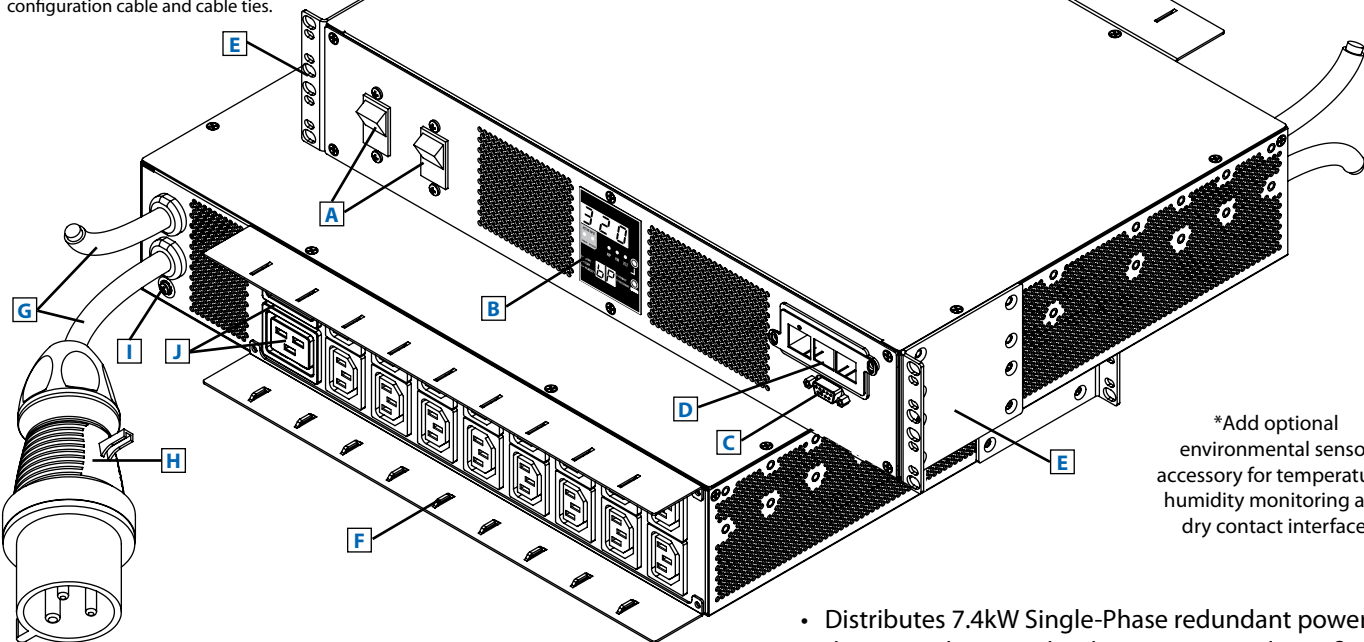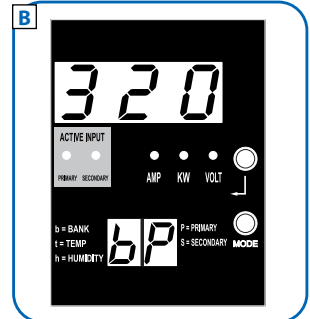

*Add optional
environmental sensor
accessory for temperature/
humidity monitoring and
dry contact interface.

- Distributes 7.4kW Single-Phase redundant power for devices with non-redundant power supply configurations
- Real-time load current display with billing-grade accuracy (+/-1%)
- Ideal for data centers and server rooms
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

Specifications


Model	PDUMH32HVATNET
Voltage	230V (Single-Phase Input/Output)
Frequency	50 / 60 Hz
Load Capacity	7.4kW
Input Plugs	IEC-309 Blue 32A (2P+E)
Input Cord Lengths	10 ft. (3 m)
Outlets	18 (16 C13 / 2 C19)
Primary Mounting Option	2U Horizontal
Unit Weight & Dimensions	13.7 lb / 3.5 x 17.5 x 12.5 (HxWxD in inches) 6.2 kg / 88 x 444 x 317 (HxWxD in mm)
Standards	See next page for detailed unit measurements. Tested to EN/IEC 60950-1, NOM (Mexico), EN Class A (Emissions), RoHS; TAA Compliant

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.




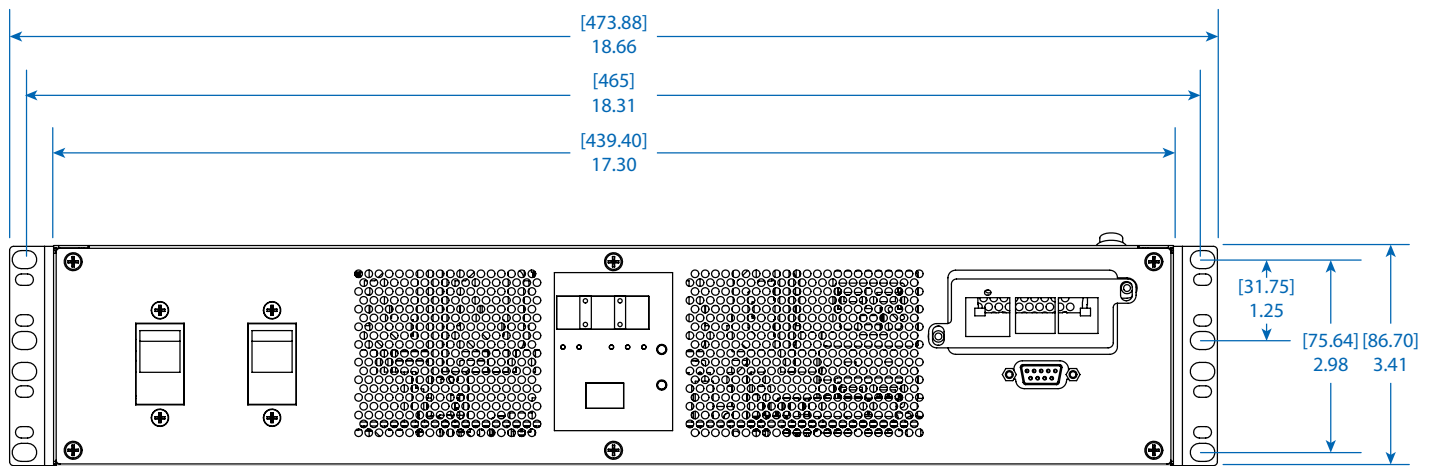

FRONT VIEW

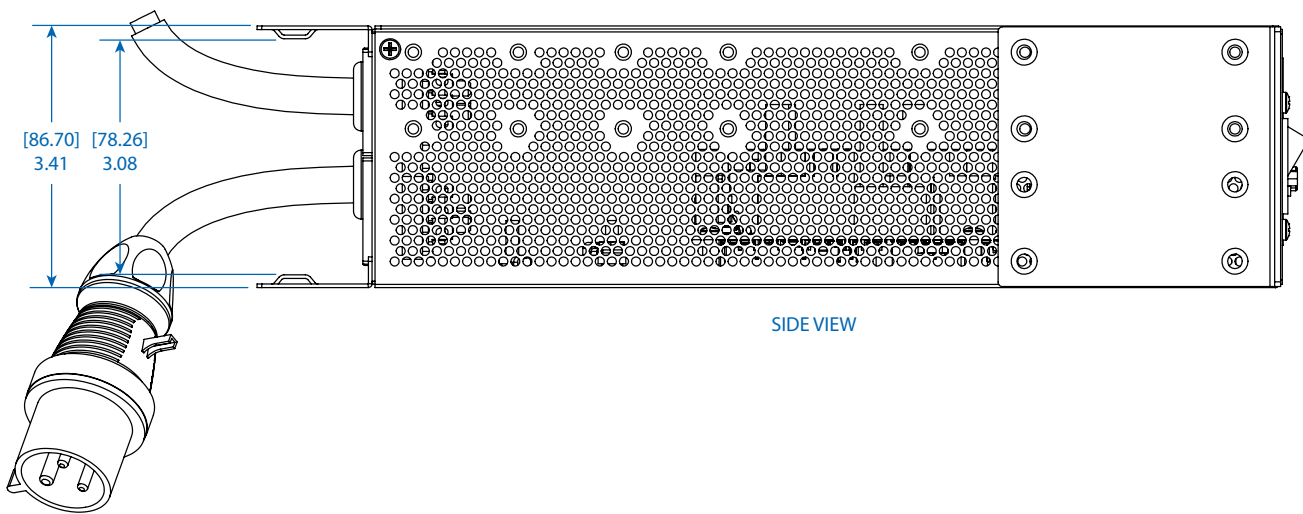

SIDE VIEW

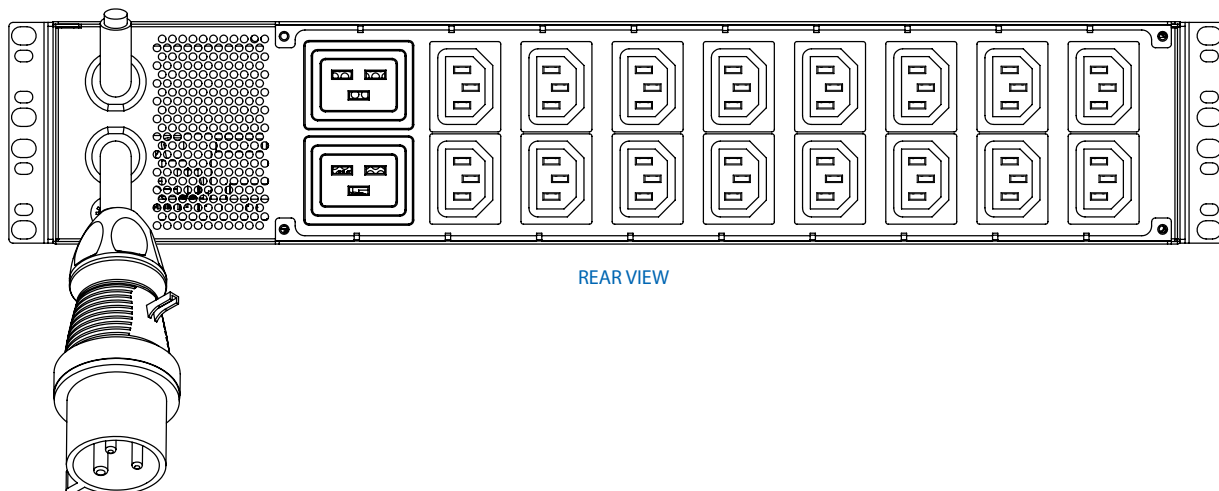

REAR VIEW

Dimensions: [mm] INCHES


Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDUMH32HVATNET



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234

www.tripplite.com

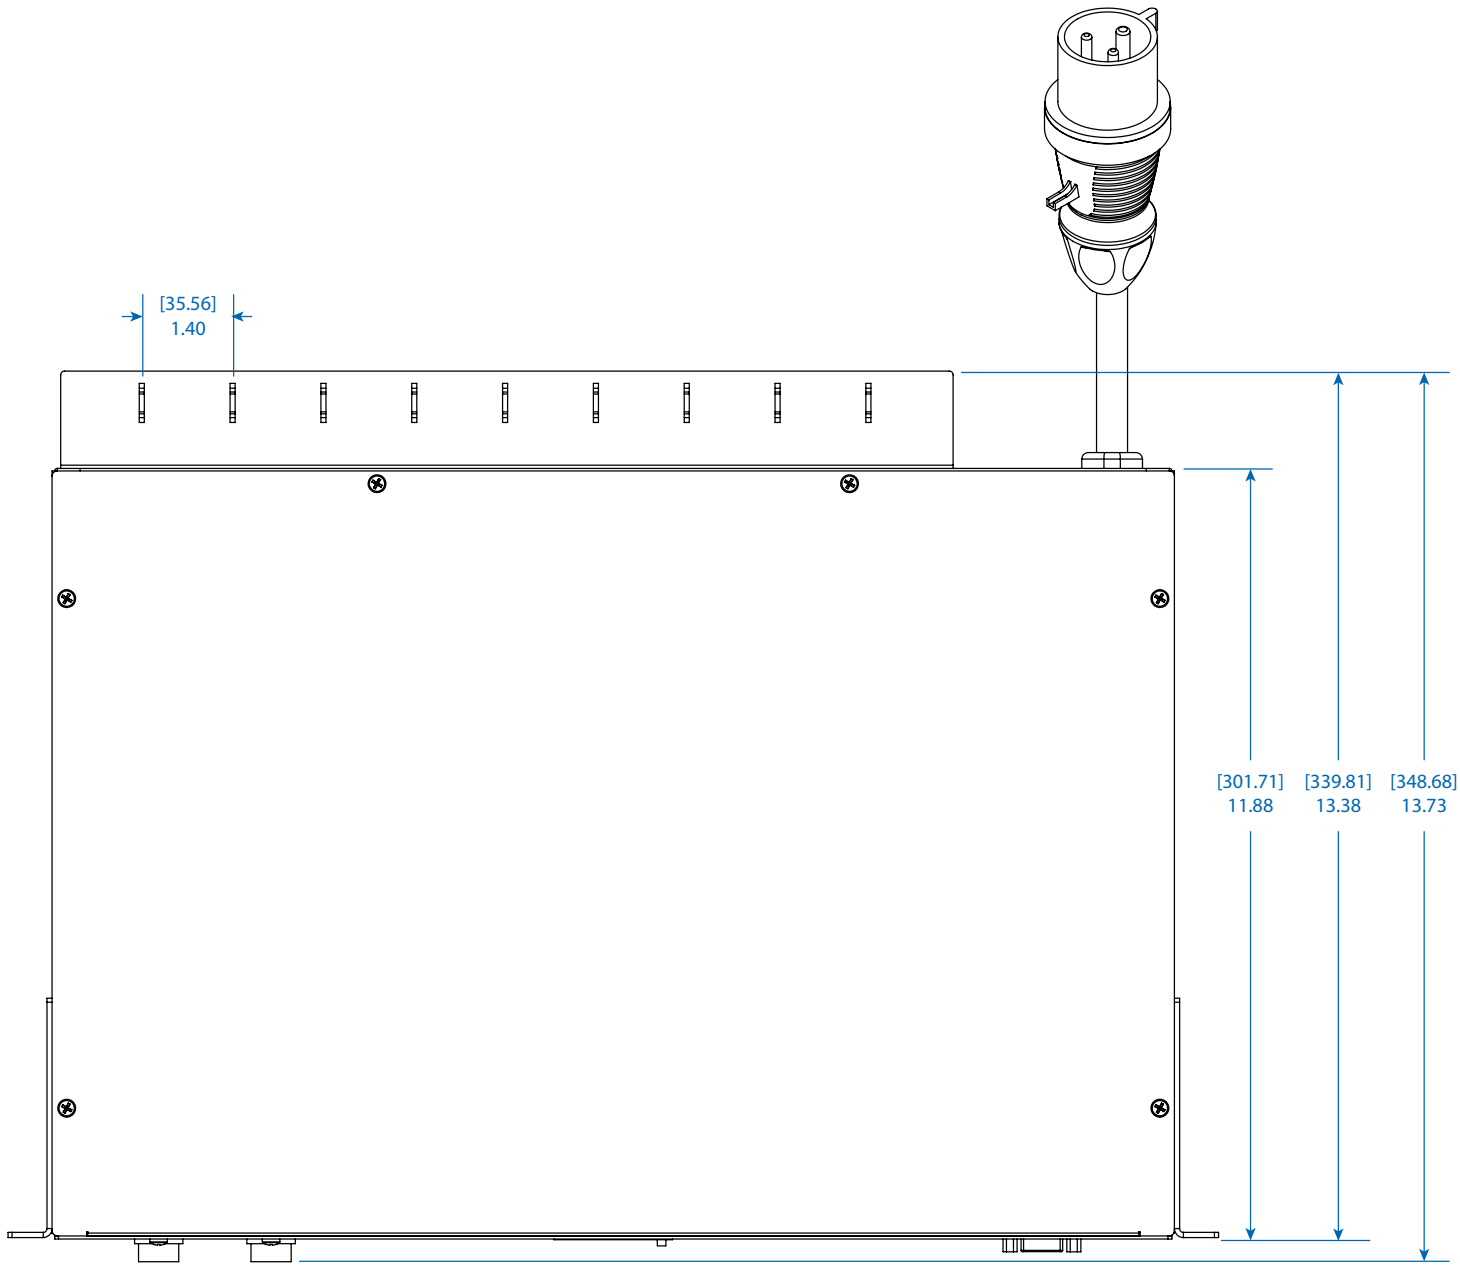

TOP VIEW

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDUMH32HVATNET



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com