


ANTI-DECUBITUS AIR MATTRESSES WITH PUMP - STAGE I AND II

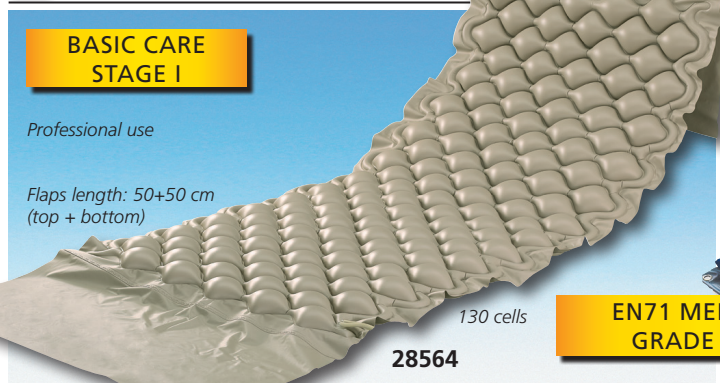

BASIC CARE STAGE I
Professional use
Flaps length: 50x50 cm (top + bottom)
130 cells
EN71 MEDICAL GRADE PVC
28564

MODERATE CARE STAGE I, II
Professional use
Cells (20+1 spare) are fixed by means of pressure stud and can easily be replaced in case of breakage
28567

ALTERNATING BUBBLE MATTRESS
Designed for the treatment and prevention of pressure sore stage I in short-term and domiciliary therapies. The PVC mattress is composed of 130 7 cm-high bubble cells, particularly comfortable. Fixable to bed by extra flaps on both top and bottom side. Cold-resistant -30 degrees.
PUMP SYSTEM
Special silent pump for an excellent pressure regulation by a knob on the front panel. It can be hung to any kind of hospital bed frame by means of two adjustable hooks. For use with bubble or alternating cell mattresses. **28565**

GIMA code		MATTRESSES AND PUMP
28564	Bubble mattress	
28565	Pump for 28564	
28566	Kit bubble mattress+pump (28564+28565)	
28567	Interchangeable cell mattress	
28568	Pump for 28567	
28569	Kit cell mattress+pump (28567+28568)	
28570	Spare cell for 28567	

Manual and box in 10 languages: GB, FR, IT, ES, DE, PT, PL, HU, GR, Arabic



TECHNICAL SPECIFICATIONS - PUMP		
	28565	28568
Size:	25x12x10 cm	
Operating voltage:	110-220 V, 50-60 Hz	
Working pressure:	40-100 mmHg	40-110 mmHg
Air output:	6-7 liter/min	6-7 liter/min
Cycle time:	6 min	12 min
Case:	TUV-CE IEC/EN60601-1; 60601-1-2	

TECHNICAL SPECIFICATIONS - MATTRESS		
	28564	28567
Total size:	200x90x7 cm	200x86x9.5 cm
Cell height:	7 cm (2.7")	9.5 cm (4")
Material:	PVC	Nylon+PVC
Thickness:	0.32 mm	0.32 mm
Load:	135 kg	140 kg

THERAPEUTIC ANTI-DECUBITUS MATTRESSES - STAGE III AND IV



MODERATE TO INTENSIVE CARE STAGE I, II, III
Ventilated low-air-loss cells wicks moisture away
Professional use
Nylon PU cover with button biocompatibility, vapor permeable & water resistant with CA117. Flame Retardant Level.
28575

INTENSIVE CARE STAGE I, II, III, IV
Cotton lining with zipper
Professional use
CPR straps quickly deflate the mattress for emergencies
Low pressure alarm
Air pressure dial adjustment
28580-2

• **28575 KIT 5010E ALTERNATING PRESSURE MATTRESS + PUMP**
Valuable overlay system designed for prevention and treatment of patients at moderate to intensive risk of pressure ulcers. Pressure is periodically redistributed by inflating and deflating cells in order to mimic natural sleep movement patterns and avoid long term pressurization of tissue. Manual in: GB, FR, IT, ES, PT, DE, PL, RO, SE, GR.
• **28576 CELL for 28575 - spare**

• **28580 KIT 8010 ALTERNATING PRESSURE MATTRESS + PUMP**
• **28582 KIT 8080 ALTERNATING PRESSURE MATTRESS + PUMP**
Advanced systems of alternating pressure mattresses. The multi-mode pump offers:
- **alternating mode:** the pressure is periodically redistributed by inflating and deflating cells in order to mimic natural sleep movement patterns and avoid long term pressurization of tissue.
- **constant static mode:** the pressure is about 2/3 lowered when compared to the same pressure level from alternating mode by means of immersion and envelopment. Visual alarms notify the caregiver of unusual situation, reducing the risk of human error. Suitable for the prevention and treatment of all stages of pressure ulcers. Manual in: GB, FR, IT, ES, PT, DE, PL, RO, SE, GR.
• **28581 CELL for 28580 - spare** • **28583 CELL for 28582 - spare**

TECHNICAL SPECIFICATIONS - PUMPS (28575, 28580, 28582)		
Size:	30x13.5x11 cm	Cycle time: 12 min
Operating voltage:	220-240 V, 50 Hz	Working pressure: 55-120 mmHg
Case material:	Flame retardant ABS	Air output: 7-8 liter/min
TUV-CE IEC/EN60601-1; 60601-1-2		
PUMP 28580, 28582 only		
Quick connector with transfer cap to transform mattress into a sealed static surface to facilitate patient transportation.		

TECHNICAL SPECIFICATIONS - MATTRESS			
	28575	28580	28582
Total size:	198x86x12.8 cm	200x86x21 cm	
Alternating	1 in 2 (group A and B)		
Cell height:	12.8 cm (5")	20 cm (8")	
Cover material:	Nylon PU with button	Nylon+PU with cotton lining	
Thickness:	0.4 mm	0.4 mm	0,25 mm
Number of cells:	17+1 spare	20+1 spare	
Cells material:	nylon PVC	nylon PVC	nylon TPU
Load:	150 kg	160 kg	200 kg

