



Pallet fork			
	LG307	◆	
SSL model	LG308	◆	
	LG312	◆	
rated payload	kg	1600	
fork length	mm	1218	
length	mm	1373	
width	mm	1200	
height	mm	1067	

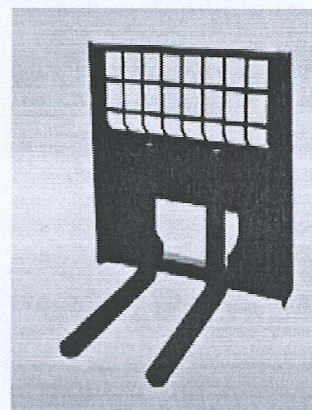



3. Auger			
	LG307	◆	
SSL model	LG308	◆	
	LG312	◆	
hole dimension	mm	500	
working flow	L/min	50~115	
working pressure	MPa	16	
maximum torque	N·m	7000	
weight	kg	260	
length	mm	1160	
width	mm	1050	
height	mm	490	

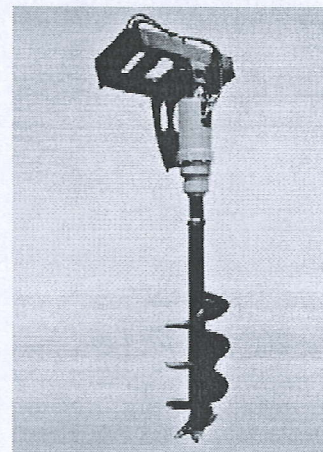


4. 4-1 bucket			
length	mm	940	
width	mm	1899	
height	mm	820	
distance	mm	900	
weight	kg	489	
bucket capacity	m ³	0.50	
working flow	L/min	20-30	
working pressure	Mpa	21	





Close sweeper			
length (mm)		1450	
width (mm)		2117	
height (mm)		926	
height without supporting spring (mm)		680	
weight with Widget (kg)		480	
bucket capacity (m ³)		0,55	
working width (mm)		1830	
dimension of brush (mm)		Φ660	
max working pressure (MPa)		21	
主机流量 flow (L/min)		60-80	

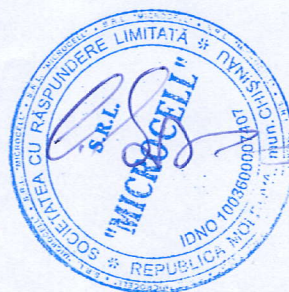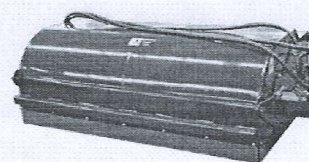

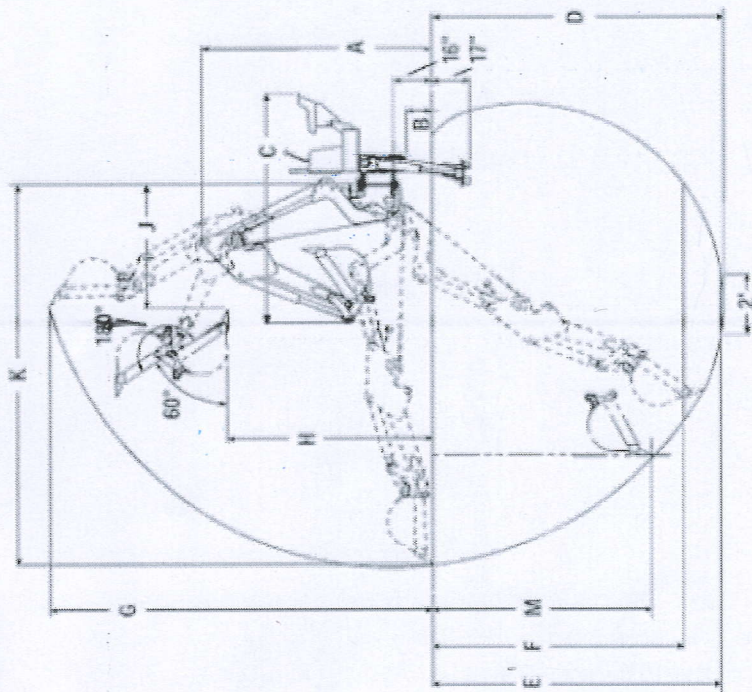

The Backhoe has the best bucket digging force for a four-bar linkage backhoe and the highest capacity buckets in its class. The longest reach from the swing post offers the ability to place material farther from the excavation and allows for fewer movers. Increase versatility by adding an optimal 66" or 75" loading height duty bucket with teeth.

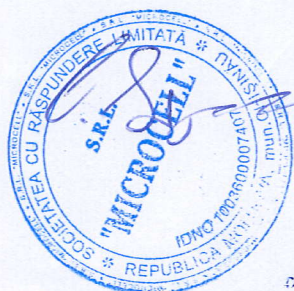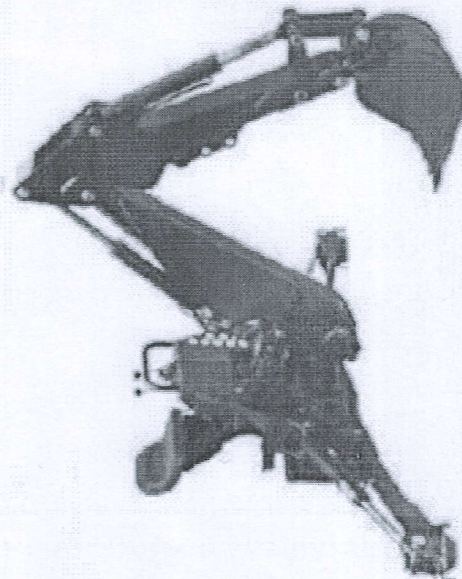

Model	
CDM307	
CDM308、CDM312	◆
Transport Height (mm) — A	2090
Support pin min. width (mm)	1486
Support pin operation width (mm)	2248
Overall Weight (kg)	610
Digging Depth Maximum (mm) — D	2489
Overall Operating Height - Fully Raised (mm) — G	2978
Loading Height (mm) — H	1911
Loading Reach (mm) — J	1334
Swing Radius (mm) — K	3188
Bucket Rotation	180°
Boom Swing Rotation	120°
Standard Bucket (m³)	0.04
System Pressure (Mpa)	14-21
System Flow (lpm)	14-22

