






**DETAYLAR**

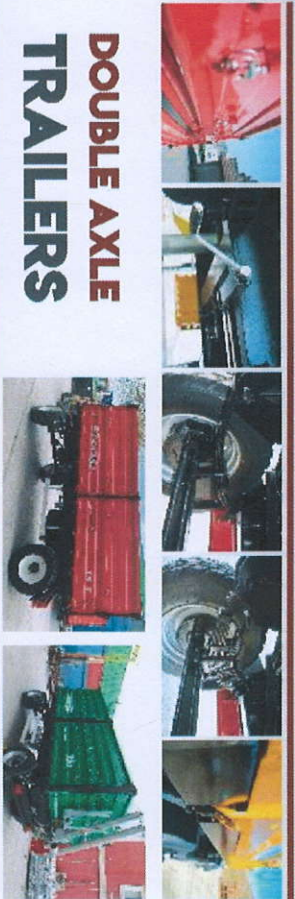

**DOUBLE AXLE TRAILERS**

All traffic regulations regarding braking, electric signaling and reflectors are suitable to use it on public roads. Trailer have competence for connect second trailer with hydraulic, pneumatic, electric connection components. All our products produced According to Machinery Directive 167/2013/EC

Double axle Trailers loading capacities are between 4 tons and 18 tons. And serve many options to users for make their job easier. Best quality and that across the range. Double axle trailer have 2,5 mm sideboards 4 mm thickness & reinforced floor. Two axle suspension is excellent for agricultural and municipal transport. Safe and comfortable use of the trailer is ensured by rear wheel's tenders, wheel chocks and spare wheel placed in 2 baskets under the trailer. Standard rear grain chute allows to fit grain flange or screw conveyor for easy unloading of grain. Additional equipment allow the trailer to fit your needs, and provide the opportunity to choose the optimal version of the trailer at the best price.

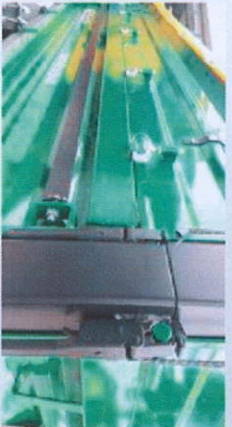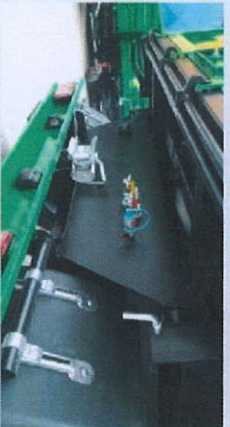

	4 TON	5 TON	6 TON	8 TON	10 TON	12 TON	15 TON	18 TON
Loading Capacity	4.000 kg	5.000 kg	6.000 kg	8.000 kg	10.000 kg	12.000 kg	15.000 kg	18.000 kg
Volume	8,0 m³	11,9 m³	12,8 m³	14,3 m³	15,3 m³	17,2 m³	15,1 m³	21 m³
Total Length	8,20C	5,850	6,200	6,45C	6,700	6,950	7,200	7,700
Total Width	2,15C	2,760	2,250	2,25C	2,250	2,250	2,45C	2,50C
Platform Length	4,00C	3,920	4,000	4,25C	4,500	4,750	5,000	5,500
Platform Width	2,00C	2,020	2,000	2,10C	2,100	2,220	2,300	2,400
Sideboards Height	500	600	600	600	300	700	700	800
Platform Height	500	1000	1000	1000	1000	1100	1000	800
Wheelbase	11.500-12,3	11.500-19,3	2.650-10,3	12,000-12,3	4000C-7,5	4000C-11,5	5000C-11	3800C-22,5

