

IBEX 108MHC-EiGER

390/395/400/405/410

IBEX HIGH EFFICIENCY MONOCRYSTALLINE SOLAR MODULES WITH HALF CELL TECHNOLOGY

0+5

Positive power tolerance (0+5W) guaranteed



High performance under low light.
Works at cloudy, rainy days



The monolithic perc cell structure technology (low resistance characteristics) is adopted (the maximum conversion efficiency of modules is up to 20.97%)



EXTREME WEATHER RATING. High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa)



Reduced resistance between cells Less micro cracks, higher output power



SUPER STRONG FRAME. The overflow tank is waterproof with double layers. Aluminum frame enhances the mechanical load strength by 10%

- IEC61215(2016), IEC61730(2016)
- ISO9001:2015: Quality Management System
- ISO45001:2018 Occupational health and safety management systems



IBEX 108MHC-EiGER 390-410

MONOCRYSTALLINE SOLAR MODULE

ELECTRICAL DATA AT STC

Module Type	390W		395W		400W		405W		410W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated power P _{mp} [Wp]	390	294	395	298	400	302	405	306	410	310
P _{mp} range to	0/+5W		0/+5W		0/+5W		0/+5W		0/+5W	
Rated current I _{mp} [A]	12.60A	10.19A	12.76A	10.23A	12.74A	10.27A	12.81A	10.31A	12.88A	10.35A
Rated voltage V _{mp} [V]	30.95V	28.85V	31.18V	29.13V	31.40V	29.41V	31.62V	29.68V	31.83V	29.95V
Short-circuit current I _{sc} [A]	13.49A	10.81A	13.56A	10.85A	13.63A	10.89A	13.70A	10.93A	13.77A	10.97A
Open-circuit voltage U _{oc} [V]	36.99V	34.97V	37.24V	35.25V	37.49V	35.54V	37.74V	35.82V	37.98V	36.10V
Efficiency at STC up to	19.97%		20.23%		20.46%		20.74%		21%	
Application Class	Class A		Class A		Class A		Class A		Class A	

LIMITING VALUES

Max. system voltage [V]	1500V DC (IEC)
Max. return current [I]	25A
Operating Temperature	- 40 to +85°C
Max. tested pressure load [Pa] ²	5400
Max. tested tensile load [Pa] ²	2400

TEMPERATURE COEFFICIENT

I _{sc}	V _{oc}	P _{max}
0.045% /°C	-0.28% /°C	-0.36% /°C



SPECIFICATIONS

Number of cells	108 (12 x 9) 182x91 mm
Dimensions	1724x1134x30 mm
Weight	21.5 kg
Front-side glass	3.2 mm tempered Low Iron Glass
Frame	Stable, anodised aluminium frame, black
Junction box	Split Junction Box (IP68)
Cable	4 mm ² , +300mm,-400mm Cust.Length
Diodes	3 Diodes
Plug-in connection	MC4 Compatible
Hail test (max. hailstrom)	Ø45mm 23 m/s 83 km/h

PACKING CONFIGURATION

Container	40 HQ	Pieces Per Pallet	36
Pallets Per container	26	Pieces per Container	936

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance depending on equipment: rated power +/- 3%, other values +/- 10%. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals. 1 The specific warranty conditions are given under www.swissenergy-solar.ch | 2 Horizontal mounted | 3 Tolerance L/W = +/- 3 mm. H +/- 2mm, the dimensions given in the order confirmation will be decisive | 4 Location and dimensions of holes on request

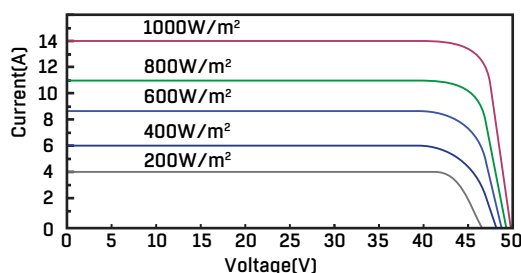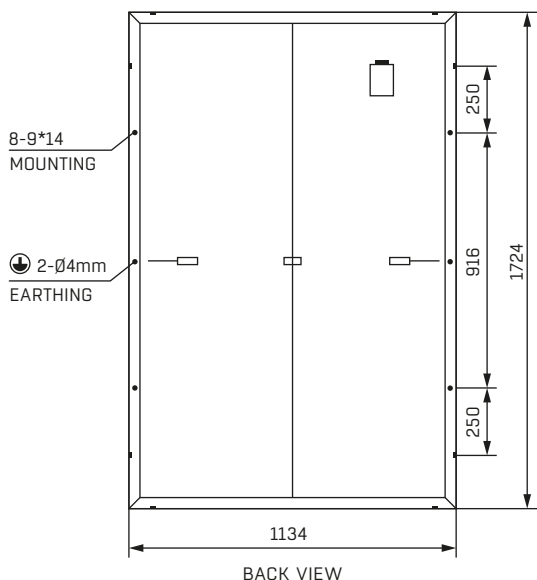

WARRANTY

20 YEARS

PRODUCT WARRANTY

30 YEARS

POWER WARRANTY