

PRODUCT SHEET: ECG200L



Description of product:

The device is a 12-lead, fully diagnostic electrocardiograph which displays, acquires, prints and stores ECG tracings, for adults and children, together with its measurements..

ECG200L is characterized by a useful 7" colour touchscreen display, from which all operations can be easily performed. A smart user interface guides the user through the different steps necessary to acquire the electrocardiogram. Various messages on the screen visually inform the user of the ongoing operations and warn him in case of errors (for example in case of lead fail).

The device is equipped with USB to export the ECG stored in the device memory.

The device can be supplied with the optional 12-lead Glasgow resting ECG interpretation algorithm, with specific criteria by age, sex and race. If this option is enabled, the algorithm provides full ECG interpretation in short or extended form, including infant, pediatric and acute ST elevation myocardial infarction detection.

For further information on the resting ECG interpretation algorithm, see the Guidance for the physician on the application on adults and children (see accessories list).

The device is battery or mains operated.

The printing formats supported include: standard or Cabrera 3, 3+1, 3+3, 6 or 12 channels in automatic mode and 3, 6 or 12 printout channels in continuous mode, as well as printout of the rhythm strip.

It is possible to export the exams on a key or USB to a PC software application named ECGEasyApp.

| GENERAL INFORMATION | |
|---------------------|--|
| Product Name | ECG200L |
| General Name | ECG200L |
| Product Code | 80608070 |
| Manufacturer | Cardioline S.p.A. |
| | Headquarters Via Linz, 151 38121 Trento Italia |
| Intended use | ECG200L is a multi-channel, interpretative resting electrocardiograph. The ECG signal is acquired with a 10-wires patient cable and is displayed in real time on a LCD screen integrated in the device. The electrocardiograph can analyse and store the ECG traces, send them to an external peripheral via USB, print the 12 lead ECG in automatic or manual mode by means of its built-in thermal printer. ECG200L is intended for assessment and diagnosis of cardiac functions. In any case the results of analysis performed by the electrocardiograph must be validated by a Physician. |

| | ECG200L is intended for use in hospitals, in medical clinics and doctor's offices of any size. |
|---------------|--|
| | The device is indicated for use to acquire, analyse, display and print electrocardiograms. |
| | ■ The device is intended to provide the physician with an automatic interpretation of the ECG to be reviewed by a physician. |
| | The device is indicated for use in a clinical setting, by a physician or by trained personnel who are acting on the orders of a licensed physician. It is not intended as a sole means of diagnosis. |
| | The interpretations of ECG offered by the device are only significant when used in conjunction with a physician over-read as well as consideration of all other relevant patient data. |
| | The device is indicated for use on adult and pediatric populations. The device is not intended to be used as a vital signs physiological monitor. |
| Year marketed | 2018 |

| TECHNICAL SPECIFICATIONS | |
|-----------------------------------|---|
| ECG Acquisition | |
| ECG channels | 12-lead (I, II, III, aVR-L-F, V1-6) |
| Patient Cable | Standard 15D connector, 10 wires patient cable |
| CMRR | > 100dB |
| Input impedance | 100ΜΩ |
| A to D converter | 16 bit, 32000 samples/second/channel |
| Sampling rate of the input stage | 32000 samples/second/channel |
| Sampling rate for signal analysis | 500 samples/second/channel |
| A/D conversion | 16 bit |
| Output Data Resolution | 5 μV/LSB |
| Dynamic Range | +/- 325 mV |
| Bandwidth | Performances equivalent to 0,05-150 Hz |
| Pacemaker detection | Hardware detection coupled with convolution digital filtering |
| Defibrillation Protection | AAMI/IEC standards |
| Front-end performance | ANSI/AAMI IEC 60601-2-25:2011 |
| Acquisition Mode | Automatic (12 leads), Manual (3/6/12 leads), STAT (12 leads), Rhythm (1 Lead for 3 minutes or 3 Leads for 1 minute) |
| Lead Configuration | Standard, Cabrera |
| Processing | |
| Pace detection | Hardware detection in compliance with the requirements 60601-2-25 |

| Lead fail detection | Independent on all leads. "Torso" function that allows you to view the disconnected electrodes in red and those correctly connected in green. |
|--------------------------|--|
| Heart Rate Meter | 30 - 300 bpm |
| Filters | Linear phase digital diagnostic high-pass filter (according to 60601-2-25 2nd ed.) 50/60 Hz AC interference adaptive digital filter Digital low pass filters at 25/40 Hz, for display and printing only |
| ECG Measurements | All leads, average, corrected HR Average RR PR Interval QRS duration QT interval and QTc interval, with Hodges, Bazzet and Fridericia's formula max R[V5]or[V6] and S[V1] Sokolow-Lyon Index P, R, T axis. |
| ECG Interpretation | Glasgow Analysis Program for Adults, Pediatric, STEMI |
| ECG Interpr. Data input | Sex, age |
| Storage | 50 ECG |
| Available languages | Brazilian, Czech, Croatian, Dutch, French, English, Italian, Polish, Portuguese, Romanian, Russian (with Russian keyboard), Serbian, Spanish, German, Turkish, Hungarian |
| Autotest | The device performs an auto-test of its internal electronic functions at every start up. |
| Processing Options | |
| Interpretation | Glasgow Analysis Program for Adults, Pediatric, STEMI (optional) |
| Supported export formats | |
| SCP | Standard |
| PDF | Through a dedicated application for files management on Personal Computer |
| Connectivity | |
| USB | Standard |
| Display | |
| Display Type | 7" TFT Backlit Color LCD with Capacitive Touch Panel |
| Display resolution | 800x480 |
| Display data | 3/6/12 leads real-time |
| Display formats | 12x1, 6x2, 6x1, 3x1 |
| Keyboard | |
| Keyboard Type | Touchscreen plus functional dedicated keys |
| Dedicated Keys | AUTO, MANUAL, STOP, LINK |
| Printer | |
| Technology | 216 mm Thermal printhead |
| Resolution | 8 dots/mm |
| Paper type | Thermal paper: roll 210x3000 mm – z-fold A4 295x210mm – letter 280x216mm |

| Sensitivity/Gain | 5, 10, 20 mm/mV |
|--|---|
| Auto print speed | 5, 10, 25, 50 mm/s |
| Auto print | 3, 3+1, 6, 12 channels; Standard or Cabrera |
| Manual print speed | 5, 10, 25, 50 mm/s |
| Manual Print | 3/6/12 channels; Standard o Cabrera |
| Rhythm Print | 1 minute 3 leads; 3 minutes 1 lead HR Trend HR statistics |
| Printing formats | 12x1, 6x2, 6+6, 3x4, 3x4+1, 3x4+3 |
| Calibration signal | Yes, 1 mV |
| Lead marker | Yes, before each lead trace |
| USB External Peripherals | |
| External data storage | USB memory stick (for data export) |
| Electrical Characteristics | |
| Power source | Internal power supply and internal rechargeable battery |
| Input Voltage | 100-240 Vac |
| Input Current | 1.5-0.75 A |
| Input frequency | 50/60 Hz |
| Rated Output | 60 W, 18 V, 3.34 A |
| Protection Class | |
| Battery Type | NIMH |
| Battery Duration | more than 500 ECGs – more than 6h |
| Battery Charging Time | 4 hours to 85% full capacity |
| Physical Characteristics | |
| Dimensions | 413x295x80 mm |
| Weight | 4,17 Kg |
| Shipping container | 580X470X280 mm – 7Kg |
| Operating Environmental Specifications | |
| Temperature | +10°C - +40°C |
| Humidity | 50% - 90% |
| Pressure | 700hPa - 1060hPa |
| Storage Environmental Specifications | |
| Temperature | 5°C - +40°C |
| Humidity | 20% - 90% |
| Pressure | 700hPa - 1060hPa |

| REGULATORY AND SAFETY | | |
|---|--|--|
| Classification according MDD 93/42/CEE | | |
| Class | Class IIa | |
| Rationale | rule 10 annex IX 93/42/EEC Directive and its amendments | |
| Notified body | TUV (1936) | |
| Classification according to FDA regulation | | |
| Classification: | In progress | |
| Product Code: | In progress | |
| Review Panel: | In progress | |
| Regulation Number: | In progress | |
| Classification according to IEC 6 | 50601-1 - Electrical Safety | |
| Protection against electric shock: | Internal power - class I | |
| Applied parts: | type CF – defibrillation-proof | |
| Protection against harmful ingress of water or particular matter: | IPX0 | |
| Method(s) of sterilization: | NA (not intended to be sterilized) | |
| Suitability for use in an oxygen rich environment: | No | |
| Mode of operation: | continuous operation | |
| Classification according to IEC 6 | 60601-1-2 - Electro Magnetic Compatibility | |
| Group | 1 | |
| Class | В | |
| Performances | | |
| Standard | EN 60601-2-25:2011 | |
| Other classifications | | |
| GMDN | 110407 - Electrocardiographs, Multichannel, Interpretive | |
| CND | Z12050302 - ELETTROCARDIOGRAFI PER DIAGNOSI AVANZATA | |
| RDM (Registration number in Italy) | 1760532 | |
| Applicable Standards | | |
| EN ISO 15223-1 | Medical devices - Symbols to be used with medical device labels, labelling and information to be supplied - Part 1: General requirements | |
| EN 1041 | Information supplied by the manufacturer of medical devices | |
| EN ISO 13485 | Medical devices - Quality management systems - Requirements for regulatory purposes (ISO 13485:2003) | |


| EN ISO 14971 | Medical devices - Application of risk management to medical devices (ISO 14971:2007, Corrected version 2007-10-01) |
|---------------|--|
| EN 60601-1 | Medical electrical equipment - Part 1: General requirements for basic safety and essential performance |
| EN 60601-1-2 | Medical electrical equipment - Part 1-2: General requirements for basic safety and essential performance - Collateral standard: Electromagnetic compatibility - Requirements and tests |
| EN 62304 | Medical device software - Software life-cycle processes |
| EN 60601-1-6 | Medical electrical equipment - Part 1-6: General requirements for basic safety and essential performance - Collateral standard: Usability |
| EN 62366 | Medical devices - Application of usability engineering to medical devices |
| EN 60601-2-25 | Medical electrical equipment - Part 2-25: Particular requirements for the safety of electrocardiographs |

| PRODUCT CODES AND ACCESSORIES | |
|-------------------------------|--|
| Accessories | |
| 869060001 | Set of 4 Peripheral ECG electrodes clamp Ag/AgCl |
| 63030106 | Set of 4 peripheral ECG electric clamp Ag/AgCl |
| 63030107 | Set of 4 peripheral ECG electric clamp pediatric Ag/AgCl |
| 828030001 | Set of 6 chest ECG electric suction type Ag/AgCl |
| 63050025 63050142 | ECG patient cable IEC, 10 lead, plug 4 mm |
| 63050068 63050143 | ECG patient cable AHA, 10 lead, plug 4 mm |
| 63050108 63050130 | ECG patient cable IEC, 10 lead, snap |
| 63050109 63050141 | ECG patient cable AHA, 10 lead, snap |
| 63050032 | ECG patient cable IEC-10 CLIP 4 mt |
| M-00-S | Disposable electrodes ECG, snap, 50 pcs |
| 66030040C | Disposable electrodes ECG, tab, 100 pcs; pack of 10 |
| N-10-A | Disposable electrodes ECF neonatal, 25 pcs |
| SU-00-A | Disposable electrodes ECG banana, 60 pcs |
| 63090236 | Set of 10 snap adapters for 4 mm plug |
| 66020008 | Adapters for tab and button electrodes for 4 mm plug, 10 pcs |
| 66010052S | Z-Fold paper A4 210x295mm, 180 sheeets, 10 pcs |
| 66010053S | Z-Fold paper Letter 216x280mm, 180 sheeets, 10 pcs |
| 63090713 | ECG200+/S/L trolley II Edition hospital grade |



ECG200L

The full format 12 lead ECG for your medical practice

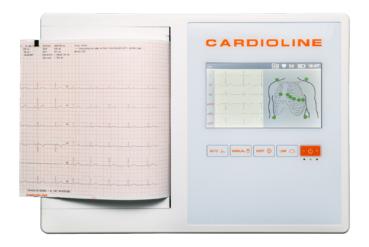


- The ECG 200L has been designed to provide simple and fast 12 lead resting ECG acquisition for the private practice.
- Particular attention has been dedicated to device usability using a brilliant 7 inches color touch screen display, as well as dedicated keys for fast operation.

- User is guided through ECG acquisition step by step, from electrode placement, to quality checking, acquisition, printing and storage.
- Automatic, manual, Stat or rhythm ECGs can alternatively be acquired at the simple touch of a key.
- The new Rhythm ECG function allows for rhythm analysis of 3 minutes of ECG, including HR trending and Variability.
- ECG files can be stored on the device or exported, through USB connection to a PC or a memory stick.
- Glasgow algorithm for interpretation is available for pediatric and adult ECGs.
- A specific ECG Management application for PC's, "ECG EasyApp," is designed to allow for easy but complete handling of patient ECGs.

rev0 12/12/2019 www.cardioline.com

Technical Specifications

| ECG channels | 12-lead (I, II, III, aVR-L-F, V1-6) |
|----------------------------------|---|
| Patient cable | Standard 15D, 10-wires |
| CMRR | >100dB |
| Input impedance | 100ΜΩ |
| Sampling rate of the input stage | 32000 samples/second/channel |
| ECG resolution | 5μV/LSB; 500 s/s |
| Dynamic range | +/- 325 mV |
| Bandwidth | Performance equivalent to 0,05-150 Hz |
| Pacemaker detection | Hardware detection coupled with convolution digital filtering |
| Filters | Linear phase digital diagnostic high-pass filter (acc. to 60601-2-25 2nd ed.) |
| | 50/60 Hz AC interference adaptive digital filter |
| | Digital low pass filters at 25/40 Hz, for display and printing only |
| Defibrillation protection | AAMI/IEC standards |
| Front-end performance | ANSI/AAMI IEC 60601-2-25:2011 |
| Acquisition mode | Automatic (12-leads), Manual (3/6-leads), Stat (12-leads), Rhythm (1/3-leads) |
| Configuration | Standard or Cabrera |
| Lead fail detection | Independent on all leads |
| ECG measurements | All leads, average, QT corrected, Sokolow-Lyon Index |
| ECG interpretation | Glasgow Analysis Program for Adult, Pediatric, STEMI |
| Export format | SCP-PDF |
| PC-ECG "Easy App" | Dedicated ECG Management application for PC |

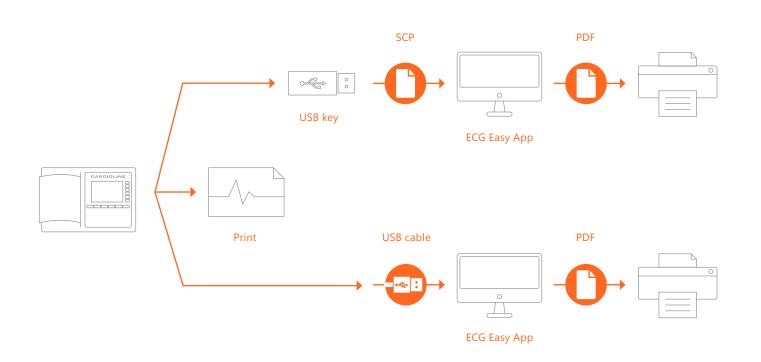

revo 12/12/2019 www.cardioline.con

Conformity Declaration complying with 93/42/EEC and 2007/47/EC Directives

The Manufacturer **CARDIOLINE S.p.A.**, headquarters in Via Linz 151, 38121 Trento - Italy, declares under its exclusive responsibility that the medical device:

Trade Mark: Cardioline Commercial denomination: ECG200L

Reference No. (REF): 80608070 / 8060979X

X=between 0 and 9 corresponding to the sales configuration

Type: electrocardiogrph (GMDN code: 16231)

Risk class:

to which this declaration refers,

- > complies with the essential requirements and the prescriptions of the Directive 93/42/EEC and 2007/47/EC
- has been designed, manufactured and tested according to the Quality Management System satisfying the requirements of Annex II of the Directive 93/42/EEC and 2007/47/EC. The Notified Body responsible of the application of the procedures set out in Annex II of the Directives is TÜV Rheinland Italia S.r.I. Via Mattei, 3 20010 Pogliano Milanese (MI), EC Notification Number 1936
- > has been certified by TÜV Rheinland Italia S.r.I., Certificate n. HD 60146561

The following operating restrictions apply to the product in order to insure conformity to the above mentioned Directive: "the product must be used as specified in accompanying documentation supplied by the manufacturer".

Dichiarazione di Conformità alla Direttive 93/42/EEC e 2007/47/EC

Il fabbricante **CARDIOLINE S.p.A.**, con sede legale in Via Linz 151 38121 Trento - Italia, dichiara sotto la propria esclusiva responsabilità che il dispositivo medico:

Marchio commerciale: Cardioline

Denominazione commerciale: ECG200L

Numero di riferimento (REF): 80608070 / 8060979X

X=fra 0 e 9 corrispondenti alle configurazioni di vendita

Tipo: **electrocardiogrph** (GMDN code: 16231)

Classe di rischio:

cui si riferisce la presente dichiarazione,

- è conforme ai requisiti essenziali ed alle disposizioni della Direttiva Dispositivi medici 93/42/CEE, recepita in Italia con il Decreto Legislativo N. 46 del 24.02.1997 e successive modificazioni
- è progettato e fabbricato in accordo al Sistema di gestione per la Qualità che soddisfa i requisiti di cui all'Allegato II della Direttiva 93/42/CEE e 2007/47/CE. L'Organismo Notificato responsabile dell'applicazione delle procedure descritte nell'Allegato II è is TÜV Rheinland Italia S.r.l. Via Mattei, 3 20010 Pogliano Milanese (MI), EC Notification Number 1936
- > è stato certificato da TÜV Rheinland Italia S.r.l., Certificat0 n. HD 60146561

Allo scopo di assicurare la conformità alla Direttiva 93/42/CEE, il prodotto è soggetto alle seguenti restrizioni operative: "il prodotto deve essere utilizzato secondo quanto prescritto nella documentazione accompagnatoria fornita dal fabbricante".

Trento, 03/03/2021

Ing. Fabio Rangoni (Presidente)

Ref. DoC ECG200L rev04

Cardioline S.p.A.

Iscrizione al Registro delle Imprese di Trento P.IVA e C.F. 03153711209 REA N. 209224 Capitale sociale € 3.024.388,00 i.v. Via Linz, 151 – 38121 Trento (TN) Italy T. +39 0461 96821 PEC cardioline@legalmail.it www.cardioline.it

CERTIFICATE

The Certification Body TÜV Rheinland Italia S.r.I.

certifies, in accordance with the TÜV Rheinland Group procedures, that the Company

Cardioline S.p.a.

Via Linz, 151

IT - 38121 Trento (TN)

has established and applies a quality management system for the following scope:

Design, manufacturing, trading, installation and servicing of systems and electrical medical devices and software for cardiology.

Through an Audit, Report No. 7968894070LM18, proof has been furnished that the quality management system fulfils the requirements of the standard

UNI CEI EN ISO 13485:2016

Please refer to the Quality Manual for the details about the exclusions with respect to the requirements of the standard.

Certificate Registration No. 39 05 0631503.

This Certificate is valid from 2021-04-25 to 2024-04-24.

The reference date for all the next audits is (day-month): 12-06.

Milan, 2021-04-25. First Certification: 2012-06-13

The certification responsible: Elena Re

TÜV Rheinland Italia S.r.I., Via E. Mattei, 3 - I - 20005 Pogliano Milanese (MI)

This certificate does not represent proof that the statutory requirements of the Directives 93/42/EEC, 90/385/EEC or 98/79/EC have been fulfilled.



SGQ N° 083 A



Management System EN ISO 13485:2016

www.tuv.com ID 9105082907





Certificato di conformità CE

EC Certificate of Conformity



Sistema completo di garanzia di qualità secondo direttiva 93/42/CEE allegato Il escluso punto 4 EC Directive 93/42/EEC Annex II, excluded clause 4 Full Quality Assurance System Medical Devices

Certificato nº:

HD 60146561

Registration No:

Fabbricante: Manufacturer:

Cardioline S.p.a.

Sede legale:

Via Linz, 151

Registered Headquarter

38121 Trento (TN) - Italia

Sede operativa:

Via Linz, 151

Operational Headquarter:

38121 Trento (TN) - Italia

Scope:

Dispositivi di monitoraggio di parametri fisiologici vitali /

Monitoring devices of vital physiological parameters

Software | Software

(Vedere allegato tecnico al presente Certificato per tipologie, modelli e codici)

(See the attachment for typologies, models and codes designation)

L'organismo notificato dichiara che il Sistema di qualità stabilito ed applicato dalla società sopra specificata soddisfa i requisiti dell'allegato II, articolo 3 della suddetta direttiva. Questa approvazione è soggetta a sorveglianza periodica, così come definita nell'allegato II, articolo 5 della suddetta direttiva e può essere utilizzata congluntamente alla dichiarazione di conformità redatta dal fabbricante. I The Notified Body hereby authorizes the quality management system established and applied by the company mentioned above. The requirements of Annex II, Article 3 of the directive have been met. This approval is subject to periodic surveillance, defined by Annex II, Article 5, of the aforementioned EC Directive, and can be used by the company with the manufacturer's declaration of conformity.

L'organismo notificato/ Notified Body

Data di emissione/Issue date:

15/04/2020

Data di ultima modificalLast revision date:

15/04/2020

Data di scadenzal Expiry date:

26/05/2024

Pagina/Page: 1 di/of 5

Paolo Caglio d

TÜV Rheinland Italia S.r.l. - Via Mattei, 3 - 20010 - Pogliano Milanese (MI)

Autorizzata dal Ministero della Salute e dal Ministero dello Sviluppo Economico Accredited by Ministry of Health and by Ministry of Economic Development

Organismo notificato con il numero 1936 presso la Commissione Europea

Notified under No. 1936 to the EC Commission

La marcatura CE può essere apposta esclusivamente se vengono soddisfatti I requisiti di tutte le direttive CE applicabili
The CE marking may be used if all relevant and effective EC Directives are complied with



Allegato tecnico al Certificato nº HD 60146561



L'organismo notificato Notified Body

TÜVRheinlar

Fabbricante/Manufacturer: Cardioline S.p.a.

Scopo/Scope: Dispositivi di monitoraggio di parametri fisiologici vitali / Monitoring

devices of vital physiological parameters

Tipologia/ Typology: Holter abpm / Abpm Holter

Modello/ Model:

Walk200b, bp one +

Tipologia/ Typology: Holter ECG / ECG Holter

Modello/ Model

Clickholter; Walk400h, click holter+

Tipologia/ Typology: Unità di acquisizione ECG / ECG Acquisition Units

Modello/ Model

HD+ : CLICKECG-HD

Tipologia/ Typology: Elettrocardiografi / Electrocardiograph

Modello/ Model:

ECGxxx (z) (+)

Legenda/ Key:

> xxx: dimensione stampante I printer size

> (z): interfaccia / interface

> (+): connettività internet / internet connection

Data di ultima modifica:

15/04/2020

Last revision date:

TÜV Rheinland Italia S.r.I. - Via Mattei, 3 - 20010 - Pogliano Milanese (MI)

Pagina/Page 2 di/of 5

Mod QMT_BSP_022 001 Rev 01

Allegato tecnico al Certificato nº HD 60146561 Attachment to the certificate:

TÜVRheinland

L'organismo notificate Notified Body

Tipologia/ Typology: **Sistemi elettrocardiografi /** Electrocardiographic systems

Modello/ Model

touchECG System

Codice/Code

KTCH\$XXYZ-@

Legenda/ Key:

- > \$= sistema operativo / Operating system (Windows or Android)
- > XX=tipo di computer / kind of computer,
- Y= tipologla di carrello / kind of cart,
- > Z= altri accessori / other accessories,
- > @=Elettrodi, cavi paziente, caratterizzazioni estetiche / Electrodes, patient cable and esthetical customizations

Tipologia/ Typology: Sistema per l'analisi di sforzo cardiavascolari/ Cardiovascular stress test system

Modello/ Model

Cubestress System

Codice/Code:

KSSXYYZWJ-@

Legenda/ Key

- > X=tipologia di sistema / system type,
- > YY=tipo di computer I kind of computer,
- > Z= tipologia di carrello / kind of cart,
- > W= tipologia di stampante / kind of printer,
- > J= accessori / other accessories.
- > @=Caratterizzazioni estetiche / esthetical customizations

Data di ultima modifica:

15/04/2020

Last revision date:

TÜV Rheinland Italia S.r.l. - Via Mattei, 3 - 20010 - Pogliano Milanese (MI)

PaginalPage 3 dilof 5

Mod_QMT_BSP_022 001 Rev.01

Allegato tecnico al Certificato nº HD 60146561 Attachment to the certificate:

TÜVRheinland

L'organismo notificato

Notified Body

Scopo/Scope: Software / Software

Tipologia/ Typology: Software elettrocardiografico / Electrocardiographic software

Modello/ Model

touchECG rel. 3.xy Ed: z

Codice/Code:

81019579 - for Windows 81019582 - for Android

Tipologia/ Typology: Sistemi software di importazione, analisi, refertazione e

archiviazione esami Holter ECG / Software systems for importing,

analyzing, reporting and archiving Holter ECG exams

Modello/ Model.

Cubeholter WS Rel. 3.xy Ed: z

Codice/Code

85039510

Modello/ Model

Cubeholter Web Rel. 3.xy Ed: z

Codice/Code

85039520

Legenda/ Key

x= versioni minori / minor changes y= correzioni / bug fix release

Se xy=00, è idenfiticato con 0 / If xy = 00, it's identified as 0

z: contenuto della configurazione / content of the distribution media

Data di ultima modifica:

15/04/2020

Last revision date.

TÜV Rheinland Italia S.r.I. - Via Mattei, 3 - 20010 - Pogliano Milanese (MI)

Pagina/Page 4 dilof 5

Mod QMT BSP_022 001 Rev.01

Allegato tecnico al Certificato nº HD 60146561 Attachment to the certificate:



L'organismo notificato

Notified Body

Tipologia/ Typology: Software di archiviazione, misurazione e refertazione esami /

Software for exams archiving, measurement and review

Modello/ Model:

ECGWebApp Rel. 2.xy Ed: z

Codice/Code:

81019560

Tipologia/ Typology: Sistemi software di monitoraggio / Monitoring systems software

Modello/ Model

CUBE SUITE; Cubeabpm; Cubestress Lite; Cubestress Rel. 1.4 .x.y Ed: z

Modello/ Model

Cubestress Rel. 4.xy Ed: z

Codice/Code

85050100

Legenda/ Key

x= versioni minori / minor changes y= correzioni / bug fix release

Se xy=00, è idenfiticato con 0 /. If xy = 00, it's identified as 0

z: contenuto della configurazione / content of the distribution media

Data di ultima modifica:

15/04/2020

Last revision date:

TÜV Rheinland Italia S.r.I. - Via Mattei, 3 - 20010 - Pogliano Milanese (MI)

PaginalPage 5 dilof 5