
Product datasheet

DULUX L 18 W/840 2G11

OSRAM DULUX L LUMILUX | CFLni, with 4-pin 2G11 base for ECG/CCG operation

- Offices, public buildings Shops Supermarkets and department stores Hotels, restaurants Industry



-
- Very economical Outstanding luminous flux Outstanding luminous efficiency Long service life OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG Less than half as long as tubular fluorescent lamps Improved maintenance



Technical data


Electrical data

Nominal wattage	18.00 W
Rated wattage	18.00 W

Photometrical data

Nominal luminous flux	1200 lm
Light color (designation)	LUMILUX Cool White
Luminous flux at	1200 lm
Rated luminous flux	1200 lm
Rated color temperature	4000 K
Rated LLMF at 4,000 h	0.90
Rated LLMF at 6,000 h	0.88
Rated LLMF at 8,000 h	0.85
Rated LLMF at 12,000 h	0.84
Rated LLMF at 16,000 h	0.81
Rated LLMF at 20,000 h	0.80
Luminance	2.1 cd/cm ²
Color rendering index Ra	≥80
Color temperature	4000 K
Luminous flux	1200 lm
Color rendering index Ra	80...89

Dimensions & weight



Diameter	17.5 mm
Overall length	214.5 mm
Tube diameter	17.5 mm
Length	217.0 mm

Product datasheet

Length acc. to IEC standard	225 mm
Length with base excl. base pins/connection	217.00 mm
Outer bulb	T16
Product weight	55.00 g
Maximum diameter	17.0 mm

Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------

Lifespan

Rated lamp life time	20000 h
Service life	13000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Lifespan	20000 h ¹⁾
Nominal lamp life time	20000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	2G11
Mercury content	2.3 mg
Appropriate disposal acc. to WEEE	Yes
Product remark	For ECG and CCG operation

Capabilities

Dimmable	Yes
Suitable for indoor	Yes

Certificates & standards


Energy efficiency class	A
Energy consumption	20 kWh/1000h

Country specific categorizations

Product datasheet

ILCOS	FSD-18/840-E-2G11-43,9/217
Order reference	DULUX L 18W/840


Light Distribution

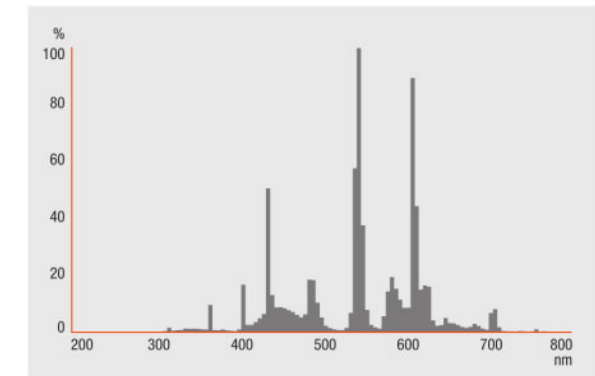


FL_840

Equipment / Accessories

- Suitable for standard control gears and starters
- Suitable for operation on electronic and conventional control gear

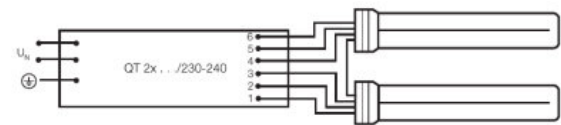

SERIES CONNECTION WITH QUICKTRONIC



SINGLE LAMP WITH QUICKTRONIC

Product datasheet

SERIES CONNECTION TO 230V ONLY WITH STARTER
ST151

SINGLE LAMP STARTER ST 111 OR ST 171

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300010724	DULUX L 18 W/840 2G11	Shipping carton box 10 Pieces Folding carton box	260 mm x 103 mm x 136 mm	3.64 dm ³	903.00 g

— The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ www.osram.com/system-guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

DULUX L 18 W/840 2G11

OSRAM DULUX L LUMILUX | CFLni, with 4-pin 2G11 base for ECG/CCG operation

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
DULUX L 18 W/840 2G11	QT-ECO 1x18-24/220-240 S	4050300638560	0.13 A	18.00 W	1200 lm	1
	QTi DALI 2x18 DIM	4050300870526	0.16 A	37.00 W	1200 lm	2
	QTi DALI 3x18 DIM	4008321069979	0.24 A	53.60 W	1200 lm	3
	QTi DALI 4x18 DIM	4008321070050	0.31 A	69.30 W	1200 lm	4
	QTP-M 1x26-42	4008321329134	0.09 A	18.00 W	1150 lm	1
	QTP-M 2x26-32	4008321329158	0.16 A	36.00 W	1150 lm	2
	QTP-OPTIMAL 1x18-40	4008321873743	0.09 A	19.00 W	1150 lm	1
	QTP-OPTIMAL 2x18-40	4008321873767	0.16 A	36.00 W	1150 lm	2

Product name	Product name ECG	EAN	EEI – Energy Label
DULUX L 18 W/840 2G11	QT-ECO 1x18-24/220-240 S	4050300638560	A2
	QTi DALI 2x18 DIM	4050300870526	
	QTi DALI 3x18 DIM	4008321069979	
	QTi DALI 4x18 DIM	4008321070050	
	QTP-M 1x26-42	4008321329134	
	QTP-M 2x26-32	4008321329158	
	QTP-OPTIMAL 1x18-40	4008321873743	
	QTP-OPTIMAL 2x18-40	4008321873767	

DULUX L BL 18 W/71

OSRAM BLUE UV-A | Ultraviolet lamps



Areas of application

- Insect traps
- Cosmetic nail curing
- Manufacture of printed circuit boards
- Tempering and curing of photosensitive material
- Fluorescent exciter for scientific and criminological investigations
- Manufacture of dental prosthetics
- Testing of banknotes and credit cards
- Terrarium illumination

Product family benefits

- Eco-friendly, chemical-free
- High quality and long service life
- Ideal for insect traps and other UVA applications
- Emits effective long-wave UVA
- Different form factors enable freedom of design
- RoHS-compliant
- Lead-free
- Low mercury content



Product datasheet

Technical data

Product information

Order reference	DULUX L BLUE 18
-----------------	-----------------

Electrical data

Lamp voltage	110 V
Lamp current	0.37 A
Nominal wattage	18.00 W

Photometrical data

Luminous intensity	7800 cd
Radiated power 315...400 nm (UVA)	-

Dimensions & weight

Diameter	18.0 mm
Length	217.0 mm

Lifespan

Lifespan	2000 h
----------	--------

Additional product data

Base (standard designation)	2G11
Product remark	4.2 W at 400...550 nm

Capabilities

Burning position	s180
------------------	------

Country specific categorizations

Order reference	DULUX L BLUE 18
-----------------	-----------------

Country specific information

Product code	METEL code	SEG-No.	STK number	UK Org
4008321198884	OSRDL1871	-	4934192	-
4008321198884	OSRDL1871	-	4934192	-

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321198884	DULUX L BL 18 W/71	Folding carton box 1	46 mm x 27 mm x 246 mm	0.31 dm ³	82.00 g
4008321198891	DULUX L BL 18 W/71	Shipping carton box 10	229 mm x 145 mm x 136 mm	4.52 dm ³	809.75 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.