

DS-K1T341CM Face Recognition Terminal



- Deep learning algorithm
- 4.3-inch capacitive touch screen, 2 MP wide-angle dual-lens
- 3,000 face capacity, 3,000 card capacity, and 150,000 event capacity
- Multiple authentication modes, including face, and card, etc.
- Face recognition duration < 0.2 s/User
- Supports mask wearing detection
- Connects to external access controller or Wiegand card reader via Wiegand protocol
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed
- Two-way audio with client software, door station, indoor station, and main station



Specification


| - Specification | | | |
|----------------------------|--|--|--|
| Display | | | |
| Screen size | 4.3 inch | | |
| Operation method | Capacitive touch screen | | |
| Туре | IPS | | |
| Video | | | |
| Lens | 2 | | |
| Resolution | 2 MP (video stream: 720P) | | |
| FOV | HFOV = 41.5°; VFOV = 75.5°; DFOV = 87° | | |
| Audio | | | |
| Audio quality | Noise suppression and echo cancellation | | |
| Network | | | |
| Wired network | Support | | |
| Interface | | | |
| Network interface | 1 RJ-45, 10/100 M self-adaptive | | |
| Lock control | 1 | | |
| Exit button | 1 | | |
| Door contact input | 1 | | |
| TAMPER | 1 | | |
| RS-485 | 1,RS-485 (Half duplex,HIKVISION) | | |
| Wiegand | 1, Wiegand (Hik 26bit, Hik 34bit) | | |
| USB | 1 | | |
| Authentication | | | |
| Card type | M1 card | | |
| General | | | |
| Built-in access controller | Support | | |
| Power supply | 12 VDC to 24 VDC, 2 A | | |
| Power consumption | ≤ 10 W | | |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) | | |
| Protective level | IP65 | | |
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, | | |
| | Portuguese (Brazil), Korean | | |
| Function | | | |
| Hik-Connect | Support | | |
| QR code recognition | Support | | |
| Face anti-spoofing | Support | | |
| | | | |


Available Model

DS-K1T341CM

Dimension



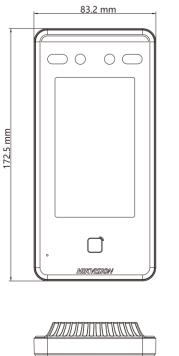





Accessory

Optional

| DS-KAB6-D1 | DS-KAB6-ZU1 Brackets for face terminals | DS-KAB671-P2 | DS-KAB34X-S1 |
|--------------|---|--------------|-------------------|
| Base Bracket | | Stand Stick | Protective Shield |
| 7 | | | |



Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision Corporate Channel



6 hikvisionhq