


CONTEC



LIGHT THE RHYTHM OF LIFE
WITH TECHNOLOGY

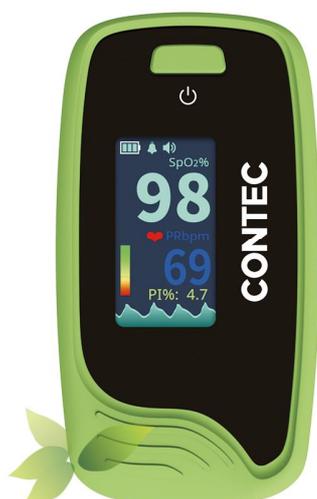

Pulse Oximeter

CMS50-Pro

Contec Medical Systems Co.,Ltd.

ADD:No.112 Qinhuang West Street, Economic & Technical Development Zone,
Qinhuangdao, Hebei Province, PEOPLE'S REPUBLIC OF CHINA

Tel: +86-335-8015430

Fax: +86-335-8015588

E-mail: cms@contecmed.com.cn

Website: <http://www.contecmed.com>

CONTEC reserves the right of product appearance, specifications and function modification and updating,
without prior notification. CMS2.782.568EXC/1.0 1.4.03.11.090

Pulse Oximeter

CMS50-Pro



Pulse rate



SpO₂



Easy to operate



Portable design



Accurate and efficient



Low power consumption



CMS50-Pro Pulse Oximeter adopts Photoelectric Oxyhemoglobin Inspection Technology integrated with Capacity Pulse Scanning & Recording Technology, which can be used to measure human oxygen saturation and pulse rate through finger. The device is suitable for use in family, hospital, oxygen bar, community healthcare and physical care in sports, etc. (It can be used before or after exercise, but not recommended to use during exercising).

Function

- Display of SpO₂ value.
- Display of pulse rate value and bar graph.
- Display of PI value (optional).
- Display of pulse waveform.
- Battery power indication (optional).
- Low-voltage indication: the low power indication symbol appears when the voltage is too low to work.
- Auto Power On.
- Auto standby.
- The display mode can be changed (optional).
- Adjustable screen brightness (optional).
- PR sound prompt (optional).
- Sound prompt (optional).
- Automatic direction-changing function (optional).

Performance

- Display: 0.96" color screen
- Screen resolution: 160 * 80
- SpO₂ measurement range: 0 % ~ 100 %
Accuracy: 70 % ~ 100 %, ± 2 %;
0 % ~ 69 %, unspecified
- PR measurement range: 30 bpm ~ 250 bpm (resolution: 1 bpm)
Accuracy: ± 2 bpm or ± 2 %, whichever is greater
- PI measurement range: 0 % ~ 20 %
Accuracy: 1% ~ 20 %, allowable absolute error: ± 1 %;
0 % ~ 0.9 %, allowable absolute error: ± 0.2 %
- Accuracy under low perfusion: low perfusion 0.4 %, SpO₂ accuracy: ± 4 %; PR accuracy: ± 2 bpm or ± 2 %, whichever is greater.
- Light interference: compared to the values measured in normal condition and ambient light condition, the deviation: ≤ ± 1 %.
- Power consumption: ≤ 30mA (without prompt sound); ≤ 80 mA (with prompt sound)
- Working voltage: DC 3.0 V
- Battery: two AAA alkaline batteries
- Working time for battery: continuously work for 20 hours at least
- Safety class: type BF applied part

Accessories

- One User Manual
- One lanyard (optional)

