




HIMOINSA

APOLO RANGE - MODEL

KT8000

KIT TOWER

Dimensions

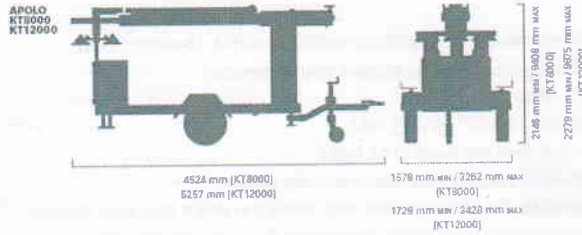


Maximum dimensions (in working mode)	(L x W x H)	4254 x 3262 x 9408
Minimum dimensions (in transport mode)	(L x W x H)	4524 x 1578 x 2146
Weight	Kg	970

DIMENSIONS CORRESPOND TO THE TOWERS MOUNTED WITH FLOODLIGHTS



Light range

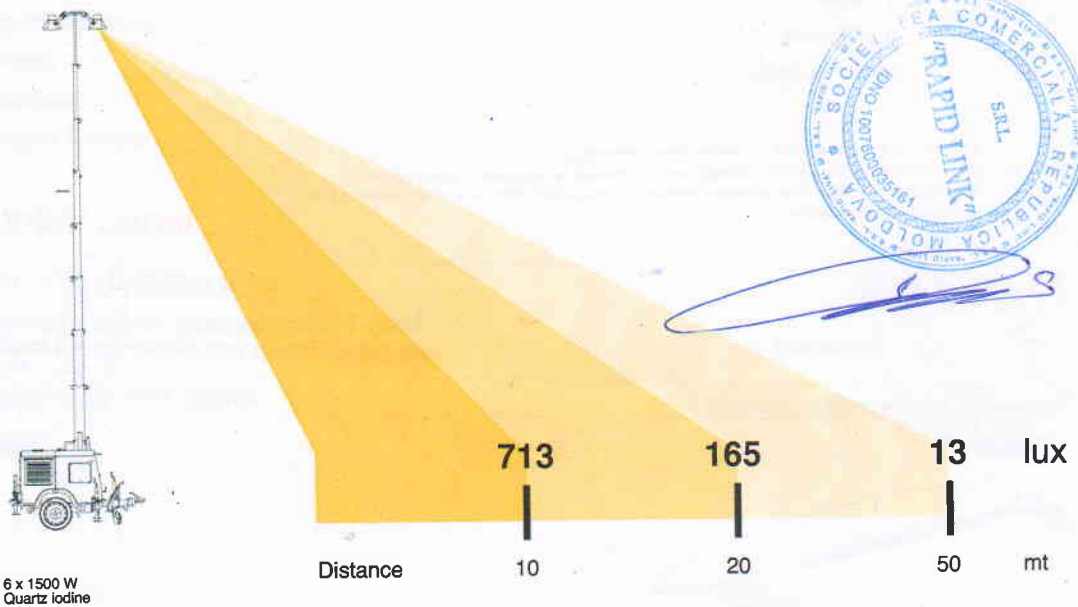

Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
 Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail: info@himoinsa.com | www.himoinsa.com





Features

Lighting tower

- A telescopic, extruded T6 aluminium mast with 3 sections, anodized with a 15-micron coat
 - The expansion system is protected by scrapers that make it fully waterproof
 - Hand wheel housed at the mast's base
 - 355° rotation of the floodlights, offering a 360° lighting field.
 - The safety screw allows the orientation of the mast to be fixed
 - The mast bracket houses and protects the hydraulic pump and the oil tank
 - The mast bracket anchors on one side, the electric motor that drives the entire hydraulic system
 - Anti-friction bronze bushings protect against any future clearances that may appear with use
 - Mobile kit with a rigid shaft
 - Ring-type mobile kit coupling
 - A foldable jockey wheel to allow it to be carried into working areas
 - Round mudguards
 - Four extensible legs with a levelling spindle; its slide and extension is protected by nylon
 - For lifting and transportation purposes, the bodywork of the tower has 4 well-marked loading rings
 - Rear cabinet with a key and foam rubber protection, designed to house the 6 spotlights (IP66 protection)
 - For T5/T6 gensets with voltage 440-220V in B10 bodywork with standard fuel tank and manual control
- Optional :
- Articulated nozzle
 - Signalling lights
 - Mobile kit for high speed travel

Electric System of the Lighting Tower

- Watertight control and manoeuvring panel fixed to the mast bracket (IP66 protection level)
- The watertight control panel includes two manoeuvre buttons, the manoeuvring panel and the connection hose between the generator set and the tower
- This control and handling cabinet, can be locked with a key or closed manually using its two locks
- The upper button controls the inclination (from 0° to 90°) and the raising of the mast
- The lower button controls the descent of the mast to the minimum vertical position and its retraction

Himoinsa has the right to modify any feature without prior notice.
Weights and dimensions based on standard products. Illustrations may include optional equipment.
Technical data described in this catalogue correspond to the available information at the moment of printing.
Industrial design under patent.

Local Distributor





Mast

Mast type		Hydraulic
Mast sections		3
Raising / lowering time		-
Rotation		360° manual
Double safety block		Standard
Lamps	n°	4 X 350 W
Lamps type		Quartz iodine
Total lumens	lm	
Remaining power	kW	-

Bodywork

Canopy		-
Retention tray		-
Auxiliary sockets		-
Auxiliary input supply socket		-
Lifting hook		Standard

02

Chassis

Chassis traction kit		Standard
Signalling lamps		Standard
Wheels		Jockey Wheel
Stabilisers		4
Bracket holders		-

Control panel

Control and protection panel		-
Thermal magnetic switches to protect the spotlights and auxiliary sockets		Standard
Manoeuvring push buttons		2 (1 rising, 1 descending)






HIMOINSA

APOLO RANGE - MODEL

KT8000

KIT TOWER

Dimensions

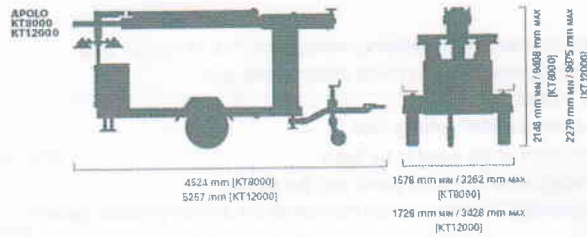


Maximum dimensions (in working mode)	(L x W x H)	4254 x 3262 x 9408
Minimum dimensions (in transport mode)	(L x W x H)	4524 x 1578 x 2146
Weight	Kg	970

DIMENSIONS CORRESPOND TO THE TOWERS MOUNTED WITH FLOODLIGHTS



03

Light range

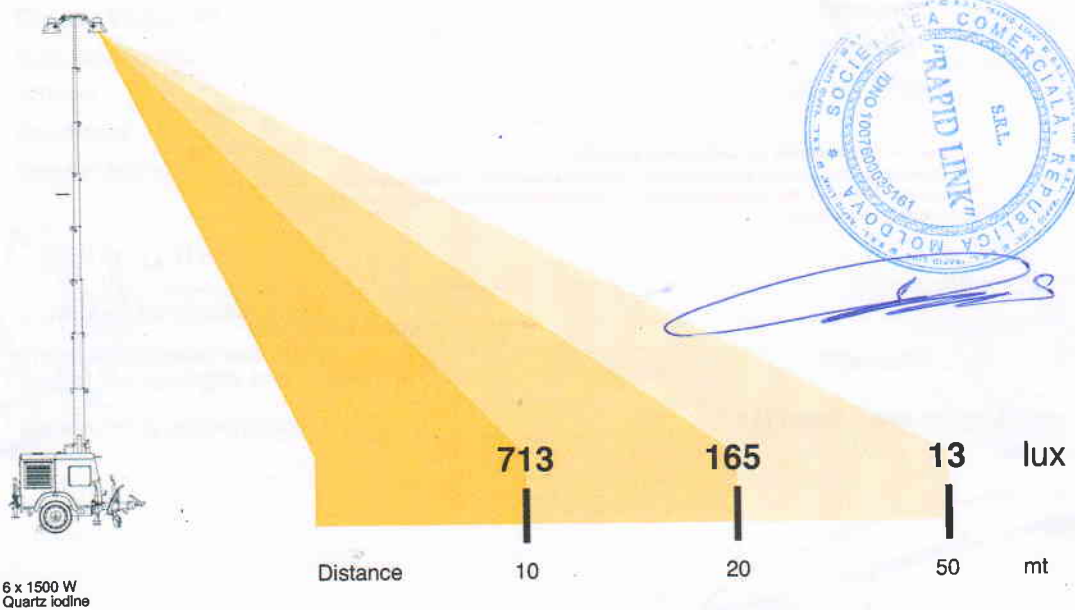

Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
 Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail: info@himoinsa.com | www.himoinsa.com

