

VIZULO

EAGLE Standard Eco
EG3E1100 750 L87 BB0360 CJA DI1

Project Chisinau International Airport
Customer CAPITAL SRL



CE RoHS 

Color

RAL 7035

Electrical

Input power	1100 W
Input voltage	220 - 240 V
Frequency	50 - 60 Hz
Power factor	0.98
Inrush current	5.12 A / 28400 μ s
Stand-by power	0.5 W

Optical


Optic name	L87
Optic type	TYPE-III
Luminous flux	152577 lm \pm 7%
Luminous efficacy	139 lm/W
Performance temperature Tq	+25 °C
Constant light output	No
Color rendering index	>70
Color temperature	5000 K
Color tolerance	5 SDCM
ULOR	0
LED quantity	360

Lifetime

Lumen depreciation	L90 after 100 000 h
Warranty	5 years
Ambient temperature range	-40 ... +50 °C


Protection	Protection class	Class I
	Surge protection L-N	10 kV
	Surge protection L/N-PE	10 kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	1
	Ingress protection	IP66
	Impact resistance	IK10
Housing	Body material	Die-cast aluminium
	Cover material	Flat tempered glass
	Optic material	PMMA
	Color	RAL 7035 (light grey)
	Dimensions	607 x 868 x 705 mm
	Mounting	Standard
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
	Accessibility of electronic components	With tools
Controls	Dimming	DALI
	Dimming range	6 - 100%
Approvals	CE	Yes
	RoHS	Yes
	Ball-proof	Yes

Light distribution

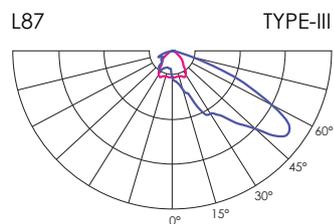

Dimensions

A x B x C (mm): 607 x 868 x 705

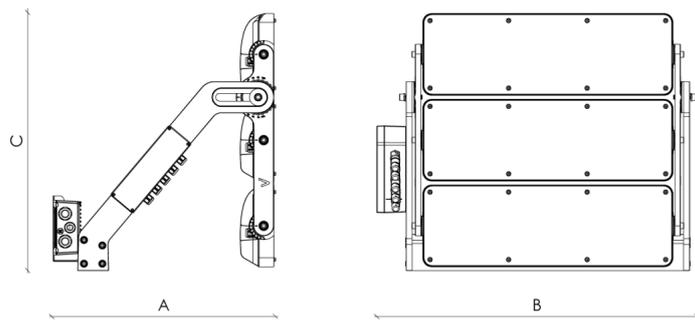

Product images

