

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95F

[Link to product's PDF drawing](#) 

TECHNICAL FEATURES

Type	N95F
Type	Melt Blown
Height	30"
Micron	10
Efficiency	95%
Hot sanitizing	No

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	80°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Connection	Flow l/h	Filtrating surface	Quantity box	€/each
N95F3010ST	30"	10	ST	3.100	0,15 m ²	15	Login

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95F

END CAPS LIST

End Caps	DOE (Standard)
CODE	ST



CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
N95F	30"	30	10 µm	10	DOE (Standard)	ST		


Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95F

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

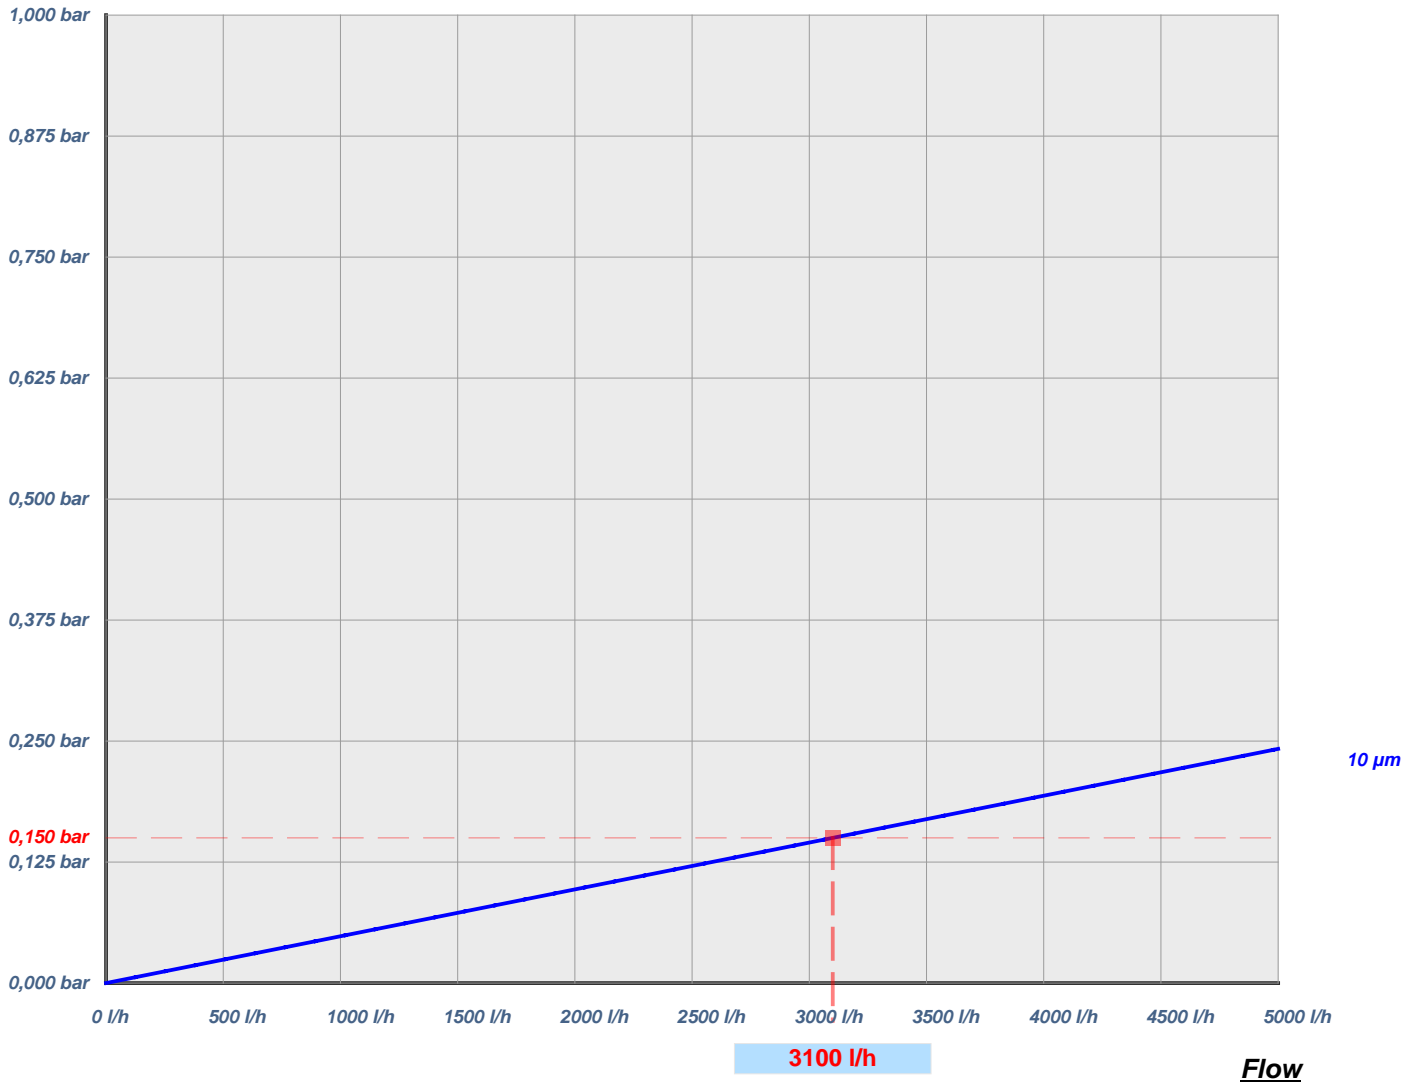

Graphic refers to 30" height cartridges. Make the correct proportion to obtain flow for taller cartridges.