


Schanz Screws

Schanz'sche Schrauben

Vis de Schanz


Indication: Fracture fixation. May also be used with REDA Circular external device and Tipofix Dynamic Axial fixators. Schanz are supplied with trocar point and three-sided end fits the Universal chuck.

Material: Certified **Stainless Steel** according to ASTM F.138 - ISO 5832/1.

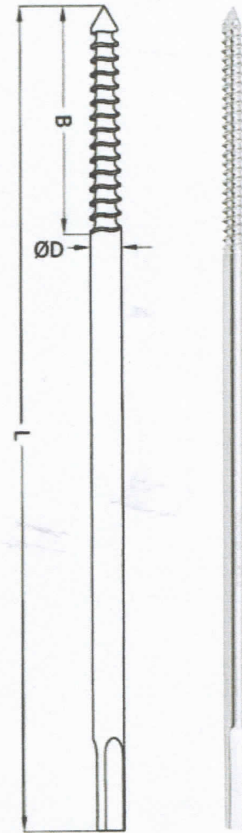

Ref. No Stainless Steel	Diam	Thread Length mm	Length mm
ROT-415150-30	3.0	30	150
ROT-415130-35	3.5	30	130
ROT-415150-35	3.5	35	150
ROT-415180-35	3.5	35	180
ROT-415130-40	4.0	30	130
ROT-415150-40	4.0	35	150
ROT-415180-40	4.0	40	180
ROT-415130-45	4.5	35	130
ROT-415150-45	4.5	45	150
ROT-415180-45	4.5	45	180
ROT-415130-50	5.0	35	130
ROT-415150-50	5.0	45	150
ROT-415180-50	5.0	45	180
ROT-415200-50	5.0	45	200
ROT-415220-50	5.0	45	220

not 26.23

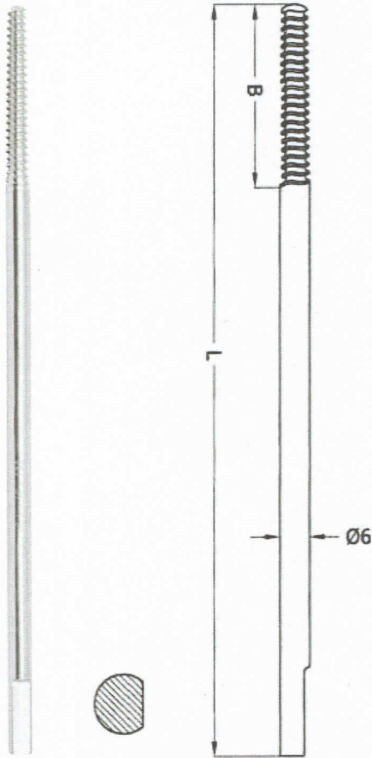

Schanz Screws with cortical thread

Schanz'sche Schrauben mit Kortikalisgewinde

Vis de Schanz à filetage cortical


Indication: Fracture fixation. May also be used specially with Tipofix Dynamic Axial fixators. These schanz screws are supplied with three-sided end fits the Universal chuck.

Material: Certified **Stainless Steel** according to ASTM F.138 - ISO 5832/1

Ref. No	Diam	Thread Length mm	Length mm
Stainless Steel			
ROT-416130-60	6.0	30	130
ROT-416150-60	6.0	45	150
ROT-416180-60	6.0	45	180
ROT-416200-60	6.0	45	200
ROT-416220-60	6.0	55	220

*poz. 26.24
poz. 26.25*

Section of Schanz intramedullary screws system with cancellous thread

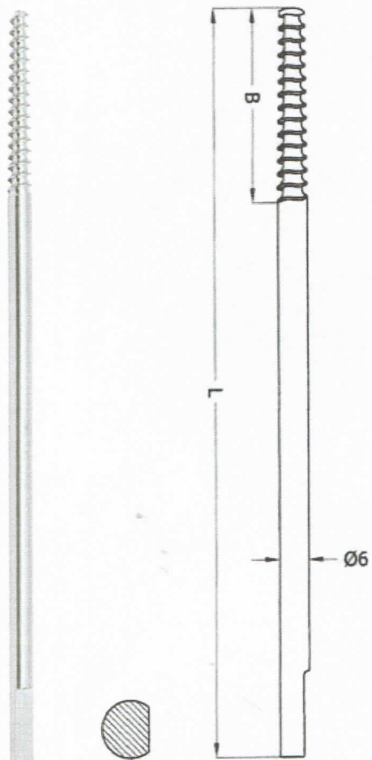

Schanz Screws with cancellous thread

Schanz'sche Schrauben mit Spongiosagewinde

Vis de Schanz à filetage spongieux

Indication: Fracture fixation. May also be used specially with Tipofix Dynamic Axial fixators. These schanz screws are supplied with three-sided end fits the Universal chuck.

Material: Certified Stainless Steel according to ASTM F.138 - ISO 5832/1

Ref. No	Diam	Thread Length mm	Length mm
Stainless Steel			
ROT-416130-60 C	6.0	30	130
ROT-416150-60 C	6.0	45	150
ROT-416180-60 C	6.0	45	180
ROT-416200-60 C	6.0	45	200
ROT-416220-60 C	6.0	55	220
ROT-416250-60 C	6.0	70	250