

CITYBAC®

1100L DL



SULO®

Citybac® 1100L Dome Lid



PRODUCT DETAILS



- 1 Dome Lid
- 2 Handle / recessed grip
- 3 Lid handles lateral 2x
- 4 Finger guard
- 5 Marking areas
- 6 Lid opening pegs 2x
- 7 Lid hinge 2x
- 8 Push-buttons to close the domed lid

- A Body reinforced with beads
- B DIN comb lifting system, double stage
- C Stacking ribs
- D SULO sticker / Marking areas
- E Ergonomic handles lateral 4x
- F Chip nest as standard
- G Lifting trunnion
- H Functional castors 2x
- I Double stop break 2x
- J Castors 2x



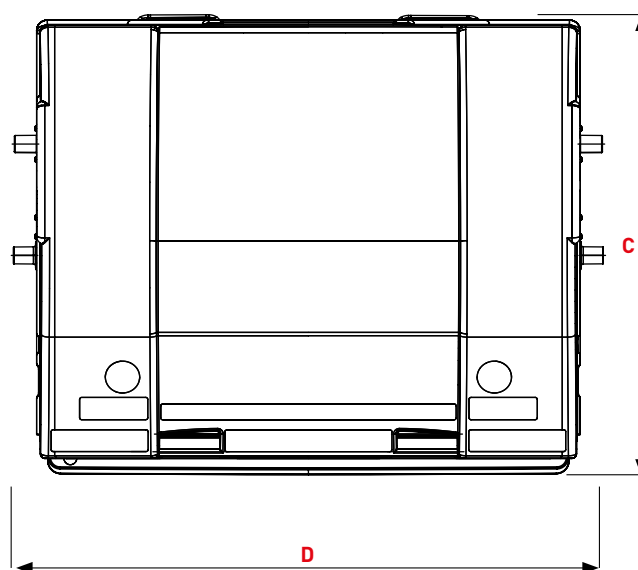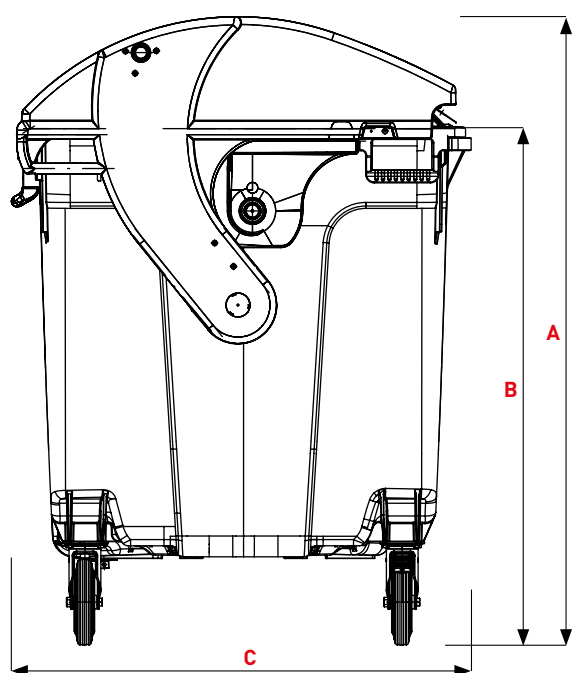

DOMES LID

Dimensions (mm)

A Height total ~	1460
B Upper comb edge ~	1205
C Bin depth ~	1060
D Width total ~	1370

Weights

Nominal volume (L)	1100
Empty weight (kg) ~	54
Max. filling weight(kg) ~	440
Max. total weight (kg) ~	510

DOMES LID WITH LID-IN-LID

Dimensions (mm)

A Height total ~	1460
B Upper comb edge ~	1205
C Bin depth ~	1060
D Width total ~	1370

Weights

Nominal volume (L)	1100
Empty weight (kg) ~	54
Max. filling weight(kg) ~	440
Max. total weight (kg) ~	510

Citybac® 1100L Dome Lid

PRODUCT DETAILS

COLOURING

Bin bodies made from 100 % recycled material with a minimum of 60 % post-consumer recycled material.



GREY
RAL 7021
AT

ECO FRIENDLY 


Perfectly set in scene with coloured **lids** for fraction identification



GREY
RAL 7021
AT



GREEN
RAL 6011
VJ



BROWN
RAL 8025
MR



BLUE
RAL 5023
BN



YELLOW
RAL 1018
JA



ORANGE
RAL 2008
OF



RED
RAL 3000
RN

ALTERNATIVE COLOURS FOR THE BIN BODY



GREEN
RAL 6011
VJ

ECO FRIENDLY 




BROWN
RAL 8025
MR

ECO FRIENDLY 




BLUE
RAL 5023
BN

ECO FRIENDLY 




YELLOW
RAL 1018
JA

ECO FRIENDLY 


Colours may vary due to production. The colour values given according to RAL are guide colours.

+ OPTIONS

LID-IN-LID



front lid available
in the colours



Lid-in-Lid

LID SLOT SYSTEMS

Glass



2x Round slot with
rubber rosette
Ø 150 mm

Paper



Opening slot
530 x 95 mm



Paper Inlet Hood
BLUE

LIFTING SYSTEMS



Fork lift device



Lifting trunnions



Lateral handles 2x



Rear handles
2x

HANDLES

TRANSPORT



Towing system

LID OPENING



Lid opening device,
foot execution

NOISE REDUCTIONS SYSTEMS



Lid Opening Noise
Reduction



Lid closing damper

CHASSIS



Plastic rim,
Rubber wheel
Ø 200 mm



Plastic rim,
Rubber wheel
Ø 200 mm,
non-marking



Steel rim,
ball bearing,
Rubber wheel
Ø 200 mm



Double stop (DS)



Central locking
device (ZF)



Steering lock

LOCKING SYSTEMS



Triangular Locks



Padlock Fixtures



Cylinder lock with
automatic function



Cylinder lock without
automatic function

Citybac® 4-Wheel

TECHNICAL INFORMATION

1.100 LITRE DL

MATERIAL OPTIONS

Extra UV protection



COLOURS

Standard colours



Other colours



LID SYSTEMS

Flat lid

Flat lid with Lid-in-Lid (LiL)

Dome lid



Dome lid with Lid-in-Lid (LiL)



LIFTING SYSTEMS

EN 840 / DIN Comb



Lifting trunnions



Lifting handles 2x



Rear handles



Fork lift device



WATER DRAIN

Water drain



Without water drain



TRANSPORT

Towing system with or without bar



LID SLOT SYSTEMS

Glass

2 x Round slot with rubber rosette Ø 150 mm



Paper

Opening slot: 530 x 95 mm



Paper Inlet Hood Blue



LID OPENING

Lid opening device, foot execution



NOISE REDUCTIONS SYSTEMS

Lid opening noise reduction



Lid closing damper



CHILD SAFETY

Comfort



Basic



Light



CHASSIS

Plastic rim, Rubber wheel Ø 200 mm	■
Plastic rim, Rubber wheel Ø 200 mm, non-marking	■
Steel rim, ball bearing	■
Castor	■
Double stop (DS)	■
Central locking device (ZF)	■
Steering lock	■

LOCKING SYSTEMS

Padlock device 1x	
Padlock device 2x	■
Triangular Lock	
with open position	■
without open position	■
Cylinder lock without automatic function	
same key locking	■
group key locking	■
different key locking	■
Cylinder lock with automatic function	
same key locking	■
group key locking	■
different key locking	■

CHIP INSTALLATION

RFID chip, installation without barcode sticker	■
RFID chip, installation with barcode sticker	■

RFID CHIP

Transponder 134kHz HDX + HID Inlay casted	■
Transponder 134kHz FDX casted	■
Transponder 134kHz FDX riveted	■
Transponder 134kHz HDX + glass	■
Transponder 125kHz FDX casted	■
Transponder 125kHz FDX riveted	■
Transponder 13,56 MHz	■

LABELLING**Body**

SULO sticker	■
Customer sticker	■
Hot foil stamping	■
Running numbers (colourless / black / white)	■

Lid

SULO sticker	■
Screen printing	■
Hot foil stamping	■
Running numbers (colourless / black / white)	■
Embossing insert	■

■ Standard
■ Option

sulo.com