

# COMMUNICATION



106R-000362

issued by : Ministry of Transport  
L.Svobody 1222/12  
110 15 Praha 1  
Czech Republic

concerning: <sup>1/</sup>

APPROVAL GRANTED  
**APPROVAL EXTENDED**  
APPROVAL REFUSED  
APPROVAL WITHDRAWN  
PRODUCTION DEFINITELY DISCONTINUED

of a type of pneumatic tyre for agricultural vehicles pursuant to Regulation No. 106

Approval No.: 106R-000362

Extension No. : I.

1. Manufacturer's name or trade mark (s) of the tyre: **PETLAS**
2. Tyre type designation by the manufacturer: **TA-60**
3. Manufacturer's name and address:  
**PETLAS TYRE INDUSTRY  
AND TRADE COMPANY  
Kindam Mah.  
Ankara Kayseri Cad. No: 2/1  
40200 Kirsehir  
TURKEY**
4. If applicable, name and address of manufacturer's representative: **N/A**
5. Summarized description:
  - 5.1. Size of tyre: **see tyre dimensions list**
  - 5.2. Category of use: **Tractor - drive wheel - standard tread**
  - 5.3. Structure: **diagonal (bias-ply)/~~bias belted~~/radial <sup>1/</sup>**
  - 5.4. Speed category symbol: **see tyre dimensions list**
  - 5.5. Load-capacity index:
    - 5.5.1. for traction (implement only): **see tyre dimensions list**
    - 5.5.2. for trailer (implement only): **-**



5.6. Whether the tyre is to be fitted with or without an inner tube ~~TUBE TYPE~~ / TUBELESS

5.7. The supplementary service description, if applicable: -

6. Technical Service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity:

IGTT a.s.  
Šternberská 446, Louky,  
763 02 ZLÍN  
CZECH REPUBLIC

7. Date of report issued by that service: -

8. Number of report issued by that service: -

9. Reason(s) of extension (if applicable): **Manufacturer's address changed, new sizes added**

10. Any remarks: -

11. Place: **Praha**

12. Date: **01.02.2018**

13. Signature:   
**Marek Brázda**

14. Annexed to this communication is a list of documents in the approval file deposited at the Administrative Services having delivered the approval and which can be obtained upon request

List of attached documents

- Request for approval

---

<sup>1/</sup> Strike out what does not apply.



Annex No.1

Tyre dimensions list from the same range

<b>LIST OF SIZES COVERED BY REPRESENTATIVE TYRE</b>	
<b>SIZE</b>	<b>LOAD /SPEED INDEX</b>
12.4/11-24 6PR	115 A6
12.4/11-24 12PR	128 A6
14.9/13-24 4PR TL	112 A6
14.9/13-24 4PR	112 A6
14.9/13-24 6PR	123 A6
14.9/13-24 10PR	134 A6
14.9/13-24 14PR	142 A6
18.4/15-26 14PR	149 A6
18.4/15-26 12PR	146 A6
18.4/15-26 12PR TL	146 A6
11.2-28 8PR	118 A6
12.4/11-28 6PR	117 A6
13.6/12-28 6PR	121 A6
13.6/12-28 8PR	125 A6
14.9/13-28 6PR	125 A6
16.9/14-28 8 PR	135 A6
16.9/14-28 10PR	139 A6
16.9/14-28 12PR	143 A6
14.9/13-30 10 PR	135 A6
16.9/14-30 6PR	130 A6
16.9/14-30 8PR	137 A6
16.9/14-30 14PR	144 A6
16.9/14-30 14PR	144 A6
18.4/15-30 6PR	134 A6
18.4/15-30 8PR	139 A6
18.4/15-30 10PR	145 A6
18.4/15-30 12PR	149 A6
16.9/14-34 8PR	139 A6
16.9/14-34 10PR	142 A6
16.9/14-34 14PR	148 A6
18.4/15-34 8PR	141 A6
18.4/15-34 10PR	146 A6
18.4/15-34 12PR	151 A6
18.4/15-34 14PR	156 A6
13.6/12-36 6PR	125 A6
14.00-38 8PR	131 A6
14.00-38 10PR	136 A6



14.00-38 10PR	136 A6
15.5-38 8PR	133 A6
15.5-38 10PR	138 A6
15.5-38 12PR	142 A6
15.5-38 14PR	145 A6
16.9/14-38 8PR	141 A6
16.9/14-38 12PR	146 A6
18.4-38 8PR	143 A6
15.5/80-24 12PR TL REINFORCED	157/145 A8
15.5/80-24 16PR TL REINFORCED	163/151 A8




## APPLICATION FOR APPROVAL REGARDING ECE R106

1. Manufacturer's name or trade mark(s) on the tyre type : **PETLAS**
2. Tread pattern designation by the manufacturer : **TA-60**
3. Manufacturer's name and address : **PETLAS TYRE INDUSTRY AND TRADE COMPANY.  
Kindam Mah. Ankara Kayseri Cad. No:2/1  
Kırşehir/Turkey**
4. Summarised description for worst case tyre
- 4.1. Size : **15.5/80-24 16PR TA-60 TL REINFORCED  
163/151 A8**
- 4.2. Category of use : **Tractor - drive wheel - standard tread**
- 4.3. Structure : **Diagonal (Bias - Ply)**
- 4.4. Speed Category symbol : **A8**
- 4.5. The load – capacity index : **163/151**
- 4.6. Tube or Tubeless type : **TUBELESS**
- 4.7. Rims on which the tyre can be mounted : **W12 W13 W14L**
- 4.8. Measuring rims and test rims : **W12**
- 4.9. The factor X : **0,80**
- 4.10. Cold inflation pressure(psi) : **50**
- 4.11. Inflation Pressure(psi) : **50**
- 4.12. Water Burst Test Pressure (kpa) : **862**

**Attachment**

1. Drawings of tread patterns

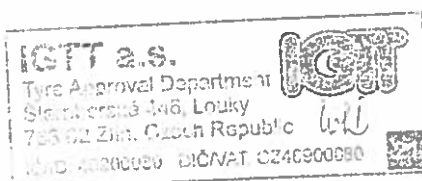

Product Performance Evaluation Manager

## APPLICATION FOR APPROVAL REGARDING ECE R106

## 5. WORST CASE REPRESENTATIVE TYRES:

## 5.1. WATER BURST TEST:

<b>WATER BURST TEST REPRESENTATIVE TYRE</b>		
<b>SIZE</b>	<b>LOAD / SPEED INDEX</b>	<b>REASON TO BE WORST CASE</b>
15.5/80-24 16PR TL REINFORCED	163/151 A8	MAXIMUM INFLATION PRESSURE LOWEST LOAD INDEX

*For Technical Drawings of Representative Tyres, Please See Attachment.*

## 6. LIST OF SIZES COVERED BY REPRESENTATIVE TYRES:

<b>LIST OF SIZES COVERED BY REPRESENTATIVE TYRE</b>	
<b>SIZE</b>	<b>LOAD /SPEED INDEX</b>
12.4/11-24 6PR	115 A6
12.4/11-24 12PR	128 A6
14.9/13-24 4PR TL	112 A6
14.9/13-24 4PR	112 A6
14.9/13-24 6PR	123 A6
14.9/13-24 10PR	134 A6
14.9/13-24 14PR	142 A6
18.4/15-26 14PR	149 A6
18.4/15-26 12PR	146 A6
18.4/15-26 12PR TL	146 A6
11.2-28 8PR	118 A6
12.4/11-28 6PR	117 A6
13.6/12-28 6PR	121 A6
13.6/12-28 8PR	125 A6
14.9/13-28 6PR	125 A6
16.9/14-28 8 PR	135 A6
16.9/14-28 10PR	139 A6
16.9/14-28 12PR	143 A6
14.9/13-30 10 PR	135 A6
16.9/14-30 6PR	130 A6
16.9/14-30 8PR	137 A6
16.9/14-30 14PR	144 A6
16.9/14-30 14PR	144 A6
18.4/15-30 6PR	134 A6
18.4/15-30 8PR	139 A6
18.4/15-30 10PR	145 A6
18.4/15-30 12PR	149 A6
16.9/14-34 8PR	139 A6
16.9/14-34 10PR	142 A6
16.9/14-34 14PR	148 A6
18.4/15-34 8PR	141 A6

## APPLICATION FOR APPROVAL REGARDING ECE R106

18.4/15-34 10PR	146 A6
18.4/15-34 12PR	151 A6
18.4/15-34 14PR	156 A6
13.6/12-36 6PR	125 A6
14.00-38 8PR	131 A6
14.00-38 10PR	136 A6
14.00-38 10PR	136 A6
15.5-38 8PR	133 A6
15.5-38 10PR	138 A6
15.5-38 12PR	142 A6
15.5-38 14PR	145 A6
16.9/14-38 8PR	141 A6
16.9/14-38 12PR	146 A6
18.4-38 8PR	143 A6
15.5/80-24 12PR TL REINFORCED	157/145 A8
15.5/80-24 16PR TL REINFORCED	163/151 A8