



Merit Laureate[®]

Hydrophilic Guide Wire




Merit Laureate®


Hydrophilic Guide Wire

EXPERIENCE THE LATEST IN HYDROPHILIC TECHNOLOGY

The Merit Laureate hydrophilic guide wire provides an optimum level of lubricity to cross the most difficult lesions and facilitates successful clinical outcomes in the most challenging procedures.

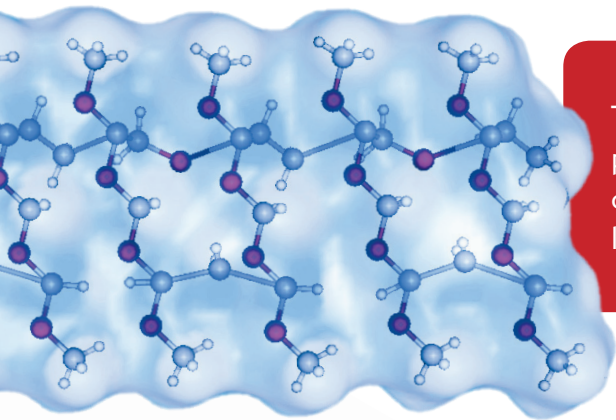


The resilient hydrated gel coating provides a constant fluid layer on the wire surface for optimum lubricity and long lasting durability.

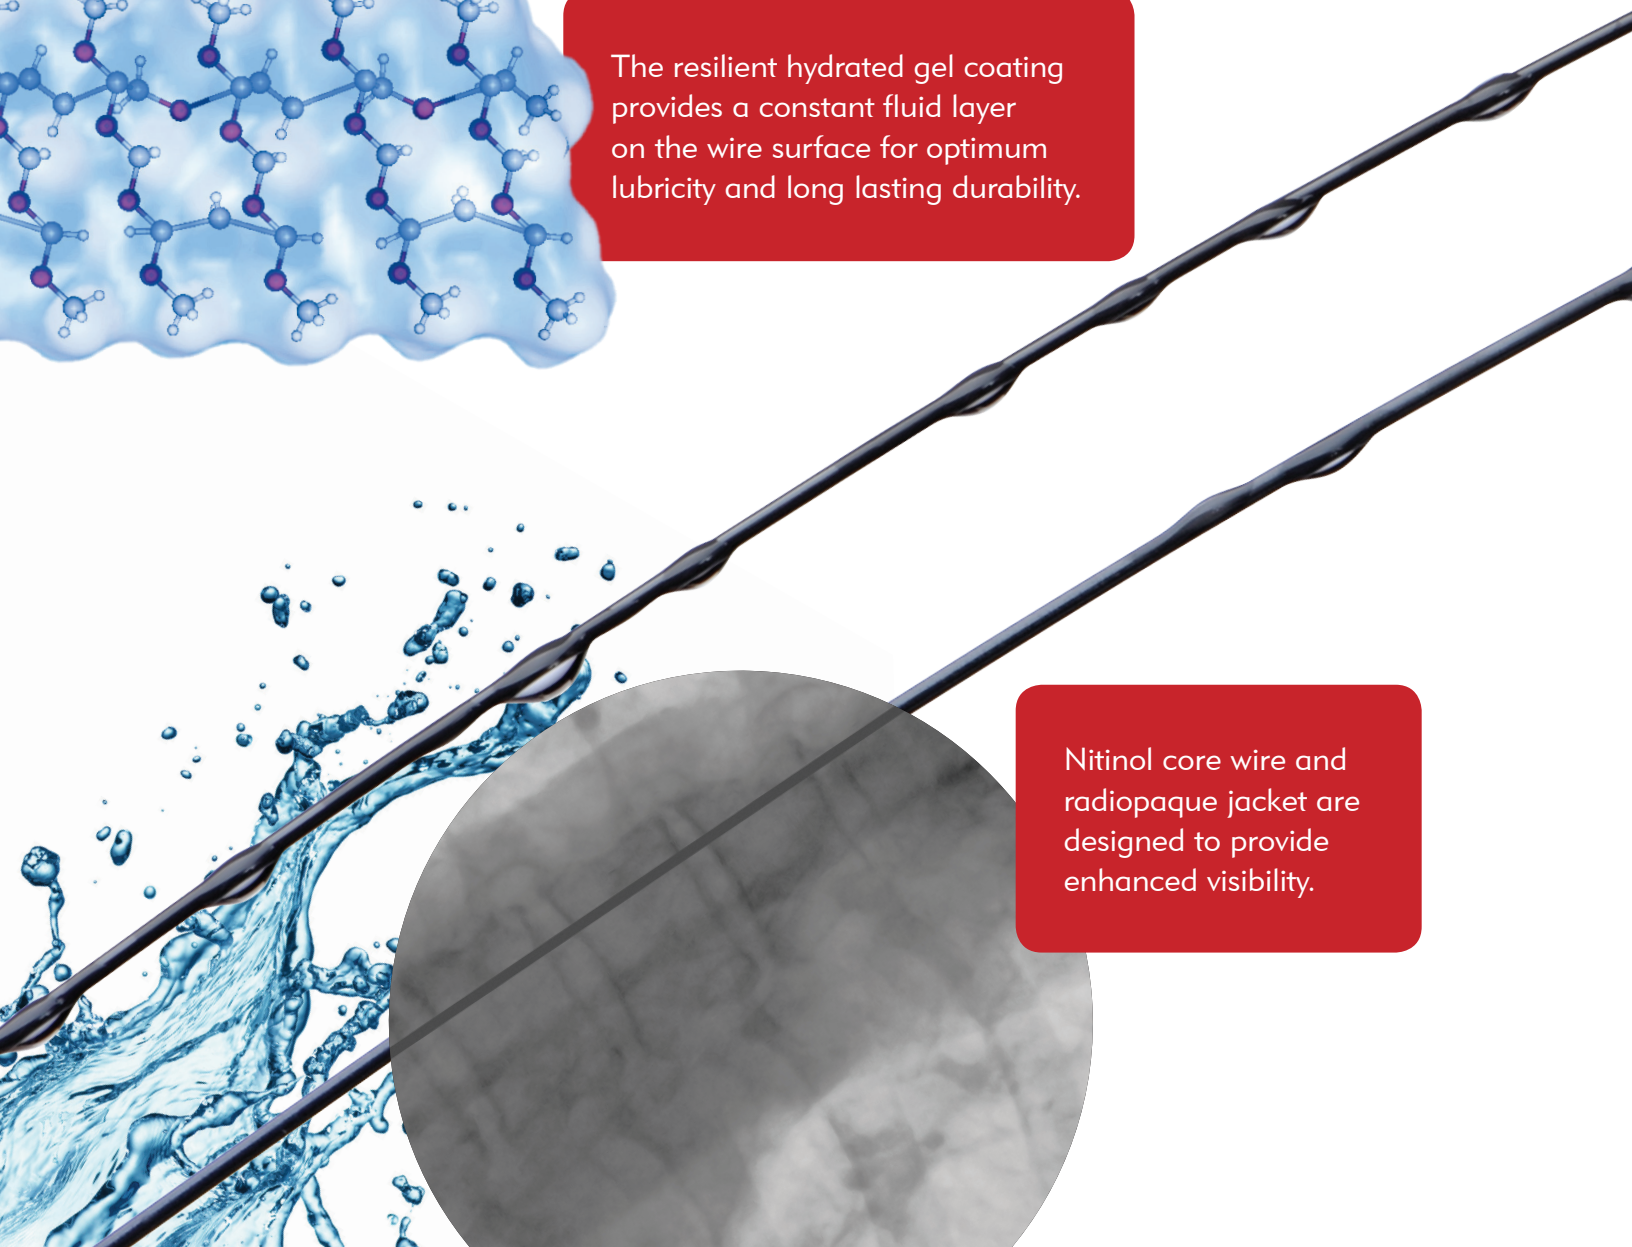


Nitinol core wire and radiopaque jacket are designed to provide enhanced visibility.

Designed to provide true 1:1 torque response to facilitate navigation and rapid vessel selection.

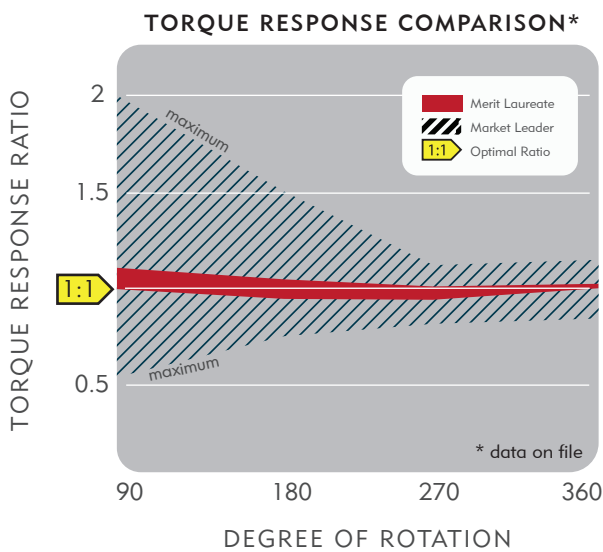


MARKET LEADER

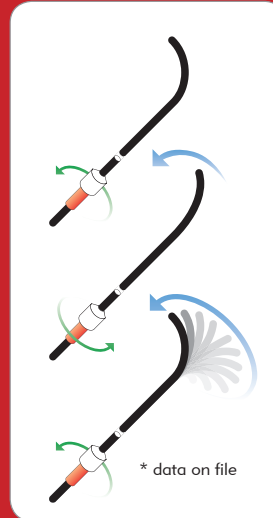

The market leader shows a slow torque response followed by rapid exaggerated movement.


MERIT LAUREATE

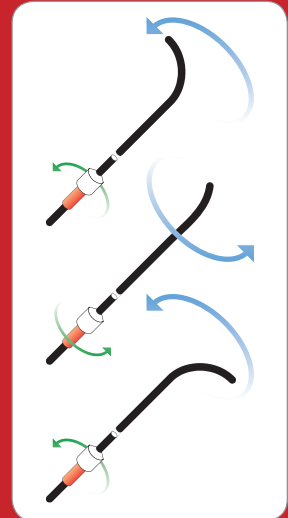

The Merit Laureate shows definitive turn for turn responsiveness (1:1 torque).

Comparative torque testing showed the Merit Laureate guide wire consistently met the 1:1 torque target.

*Bench test results may not necessarily be indicative of clinical performance.

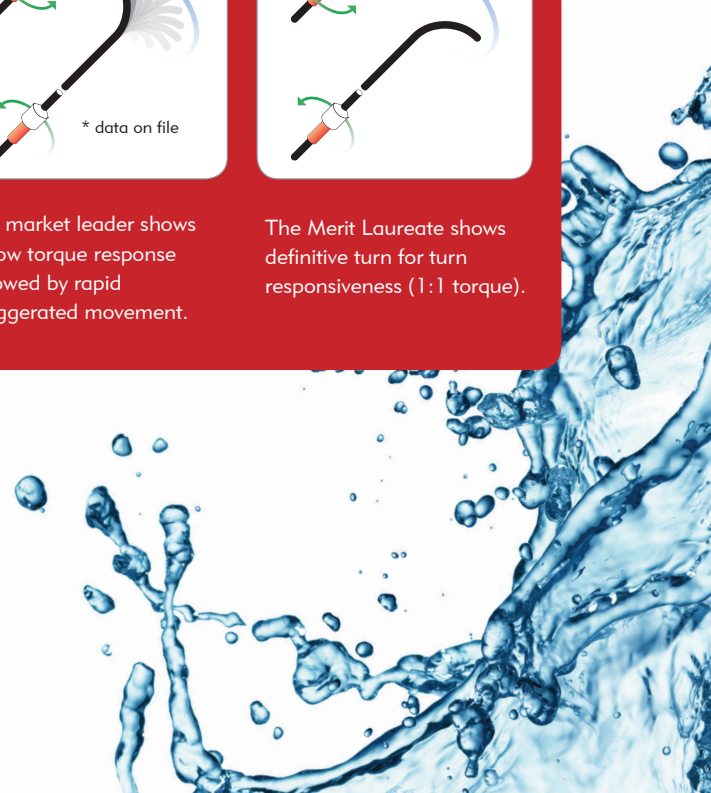

| Catalogue Number | Configuration | Tip Shape | Diameter | Length | Description |
|---------------------------------|---------------|-----------|-------------------|--------|-------------|
| 0.035" STANDARD ANGLED | | | | | |
| LWSTDA3580 | Standard | Angled | 0.035" (0.89 mm) | 80 cm | |
| LWSTDA35150 | Standard | Angled | 0.035" (0.89 mm) | 150 cm | |
| LWSTDA35180 | Standard | Angled | 0.035" (0.89 mm) | 180 cm | |
| LWSTDA35220 | Standard | Angled | 0.035" (0.89 mm) | 220 cm | |
| LWSTDA35260EX | Standard | Angled | 0.035" (0.89 mm) | 260 cm | Exchange |
| 0.035" STANDARD STRAIGHT | | | | | |
| LWSTDS3580 | Standard | Straight | 0.035" (0.89 mm) | 80 cm | |
| LWSTDS35150 | Standard | Straight | 0.035" (0.89 mm) | 150 cm | |
| LWSTDS35180 | Standard | Straight | 0.035" (0.89 mm) | 180 cm | |
| LWSTDS35220 | Standard | Straight | 0.035" (0.89 mm) | 220 cm | |
| LWSTDS35260EX | Standard | Straight | 0.035" (0.89 mm) | 260 cm | Exchange |
| 0.035" STIFF ANGLED | | | | | |
| LWSTFA3580 | Stiff | Angled | 0.035" (0.89 mm) | 80 cm | |
| LWSTFA35150 | Stiff | Angled | 0.035" (0.89 mm) | 150 cm | |
| LWSTFA35180 | Stiff | Angled | 0.035" (0.89 mm) | 180 cm | |
| LWSTFA35220 | Stiff | Angled | 0.035" (0.89 mm) | 220 cm | |
| LWSTFA35260EX | Stiff | Angled | 0.035" (0.89 mm) | 260 cm | Exchange |
| 0.035" STIFF STRAIGHT | | | | | |
| LWSTFS3580 | Stiff | Straight | 0.035" (0.89 mm) | 80 cm | |
| LWSTFS35150 | Stiff | Straight | 0.035" (0.89 mm) | 150 cm | |
| LWSTFS35180 | Stiff | Straight | 0.035" (0.89 mm) | 180 cm | |
| LWSTFS35220 | Stiff | Straight | 0.035" (0.89 mm) | 220 cm | |
| LWSTFS35260EX | Stiff | Straight | 0.035" (0.89 mm) | 260 cm | Exchange |
| 0.038" STANDARD ANGLED | | | | | |
| LWSTDA3880 | Standard | Angled | 0.038" (0.97 mm) | 80 cm | |
| LWSTDA38120 | Standard | Angled | 0.038" (0.97 mm) | 120 cm | |
| LWSTDA38150 | Standard | Angled | 0.038" (0.97 mm) | 150 cm | |
| LWSTDA38180 | Standard | Angled | 0.038" (0.97 mm) | 180 cm | |
| LWSTDA38260EX | Standard | Angled | 0.038" (0.97 mm) | 260 cm | Exchange |
| 0.038" STANDARD STRAIGHT | | | | | |
| LWSTDS38150 | Standard | Straight | 0.038" (0.97 mm) | 150 cm | |
| LWSTDS38180 | Standard | Straight | 0.038" (0.97 mm) | 180 cm | |
| LWSTDS38260EX | Standard | Straight | 0.038" (0.97 mm) | 260 cm | Exchange |
| 0.038" STIFF ANGLED | | | | | |
| LWSTFA3880 | Stiff | Angled | 0.038" (0.97 mm) | 80 cm | |
| LWSTFA38150 | Stiff | Angled | 0.038" (0.97 mm) | 150 cm | |
| LWSTFA38180 | Stiff | Angled | 0.038" (0.97 mm) | 180 cm | |
| 0.038" STIFF STRAIGHT | | | | | |
| LWSTFS38150 | Stiff | Straight | 0.038" (0.97 mm) | 150 cm | |
| LWSTFS38180 | Stiff | Straight | 0.038" (0.97 mm) | 180 cm | |
| 0.025" STANDARD ANGLED | | | | | |
| LWSTDA25150 | Standard | Angled | 0.025" (0.64 mm) | 150 cm | |
| LWSTDA25180 | Standard | Angled | 0.025" (0.64 mm) | 180 cm | |
| LWSTDA25260EX | Standard | Angled | 0.025" (0.64 mm) | 260 cm | Exchange |
| 0.025" STANDARD STRAIGHT | | | | | |
| LWSTDS25150 | Standard | Straight | 0.025" (0.64 mm) | 150 cm | |
| LWSTDS25180 | Standard | Straight | 0.025" (0.64 mm) | 180 cm | |
| LWSTDS25260EX | Standard | Straight | 0.025" (0.64 mm) | 260 cm | Exchange |
| 0.018" STANDARD ANGLED | | | | | |
| LWSTDA1880 | Standard | Angled | 0.018" (0.46 mm) | 80 cm | |
| LWSTDA18150 | Standard | Angled | 0.018" (0.46 mm) | 150 cm | |
| LWSTDA18180 | Standard | Angled | 0.018" (0.46 mm) | 180 cm | |
| LWSTDA18260EX | Standard | Angled | 0.018" (0.46 mm) | 260 cm | Exchange |
| 0.018" STANDARD STRAIGHT | | | | | |
| LWSTDS18150 | Standard | Straight | 0.018" (0.46 mm) | 150 cm | |
| LWSTDS18180 | Standard | Straight | 0.018" (0.46 mm) | 180 cm | |
| LWSTDS18260EX | Standard | Straight | 0.018" (0.46 mm) | 260 cm | Exchange |



Understand. Innovate. Deliver.™

Merit Medical France
136 Ave. Joseph Kessel,
78960 Voisins Le Bretonneux, France
+33 (0)1 30 57 24 24

Merit Medical Systems, Inc.
1600 West Merit Parkway
South Jordan, Utah 84095
+1 801-208-4300
+1 800-35-MERIT

**Merit Medical Europe, Middle East,
& Africa (EMEA)**
Amerikalaan 42, 6199 AE Maastricht-Airport
The Netherlands
+31 43 358 82 22

Merit Medical Ireland Ltd.
Parkmore Business Park West
Galway, Ireland
+353 (0) 91 703 733

Austria
0800 295 374

Belgium
0800 72 906 (Dutch)
0800 73 172 (Français)

Denmark
80 88 00 24

Finland
0800 770 586

France
0800 91 60 30

Germany
0800 182 0871

Ireland (Republic)
1800 553 163

Italy
800 897 005

Luxembourg
8002 25 22

Netherlands
0800 022 81 84

Norway
800 11629

Portugal
308 801 034

Russia
+7 495 221 89 02

Spain
+34 911238406

Sweden
020 792 445

Switzerland
(Deutsch)

+41 225180252
(Français)

+41 225948000
(Italiano)

+41 225180035
UK
0800 973 115