

1 UPS 25-60 180







!  
 , PES/PP.  
 1-  
 :  
 :  
 : 2 .. 110 °C  
 : 60 °C  
 : 983.2 / ³  
 TF : 110  
 : VDE,AAA,EAC  
 :  
 : EN-JL1030  
 : ASTM 30 B  
 : , PES/PP  
 .T : - 80 0C: 40 °C  
 : 10  
 : G 1 1/2  
 : PN 10  
 : 180  
 :  
 : 1: 50  
 : 2: 55  
 : 60  
 : 50 Hz  
 : 1 x 230  
 1: 0.21 A

C :  
: : 2.6  
: : 2.8  
: : 0.004<sup>3</sup>  
: : RS  
: : 84137030

2: 0.25 A  
3: 0.28 A  
- : 2.5  
(IEC 34-5): IP44  
(IEC 85): F

Email:  
:

UPS 25-60 180	
EAN	
TF	3 60 110 VDE,AAA,EAC
	EN-JL1030 ASTM 30 B , PES/PP
80 OC:	40 °C
	10 G 1 1/2 PN 10 180
	2.. 110 °C 60 °C 983.2 / ³
1:	50
2:	55
	60 50 Hz 1 x 230 1: 0.21 A 2: 0.25 A 3: 0.28 A 2.5 (IEC 34-5): IP44 (IEC 85): F
	9H 2.6 2.8 0.004 ³ RS 84137030

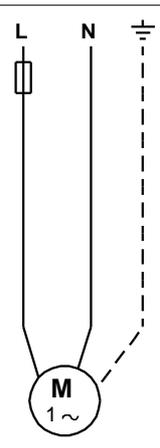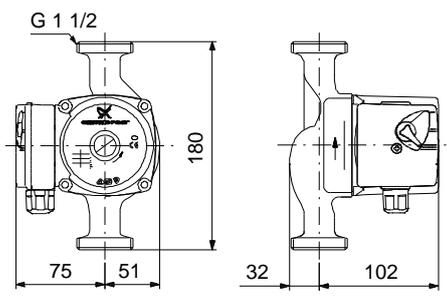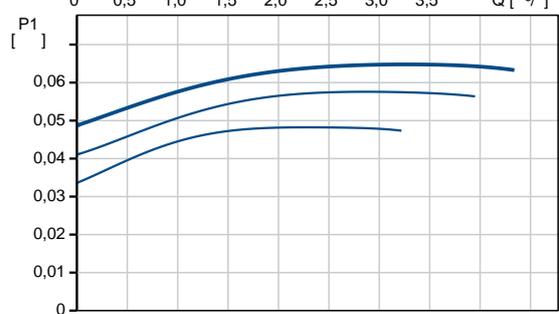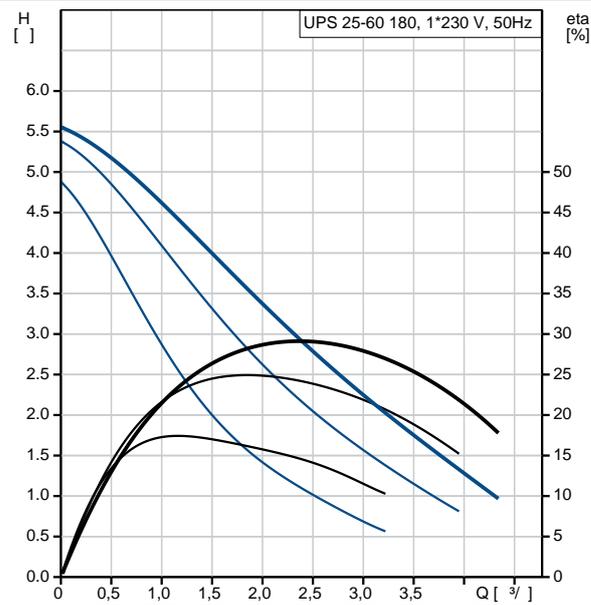



: Piroterm Service  
Saltiski Dmitri  
+37376079494  
Email: dmitri.saltiski@piroterm.md  
:  
:  
:  
04.08.2020

**UPS 25-60 180 50**