


Neuron™ MAX 088

Soft Tip, 6F Long Sheath for Neurovascular Support


Distal flexibility – measuring tip softness

- 3× softer than Cook Shuttle®
- 9× softer than Terumo Destination®

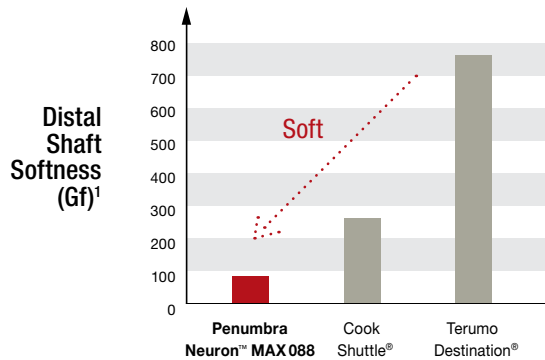

Optimal proximal support

- 75% more support than Cook Shuttle

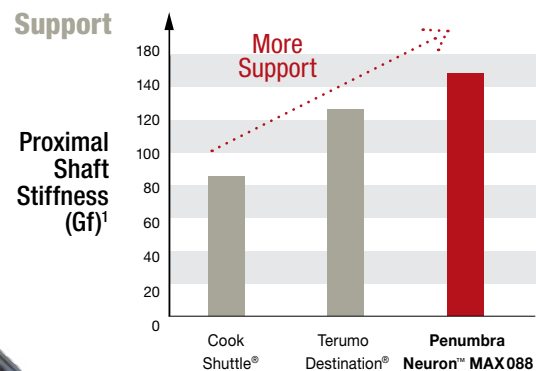

Largest lumen in class to deliver the widest range of devices

Penumbra Neuron™ MAX	Cook Shuttle®	Terumo Destination® ²
.088"	.087"	.085"

Soft, beveled tip

PX SLIM™

Compatible adjunctive device therapy

Penumbra Neuron™ MAX 088

- Prowler Select Plus
- XT-27
- Marksman
- Hyperform, Hyperglide, TransForm, Ascent, and Sceptre balloons

Penumbra

www.penumbrainc.com


1. At 50 mm gauge length via 5 mm compression at 10 mm/min rate 2. Based on measurements

Neuron™ MAX 088 Soft Tip, 6F Long Sheath

- Full length stainless steel braid reinforced proximal support zone transitioning to 4 cm distal flexible zone with large .088" inner lumen
- Distal shaft has hydrophilic coating for optimal trackability
- Available in 80 cm and 90 cm lengths with Straight and Multipurpose (MP) tip shape

6F Select™ Catheter

1. Enables primary access and atraumatic placement into desired vessel without an over-the-wire exchange
2. Useful for diagnostic angiogram – .040" lumen
3. Stainless steel braided proximal shaft for support and torque response with a soft polymer distal shaft to enable atraumatic vessel selection

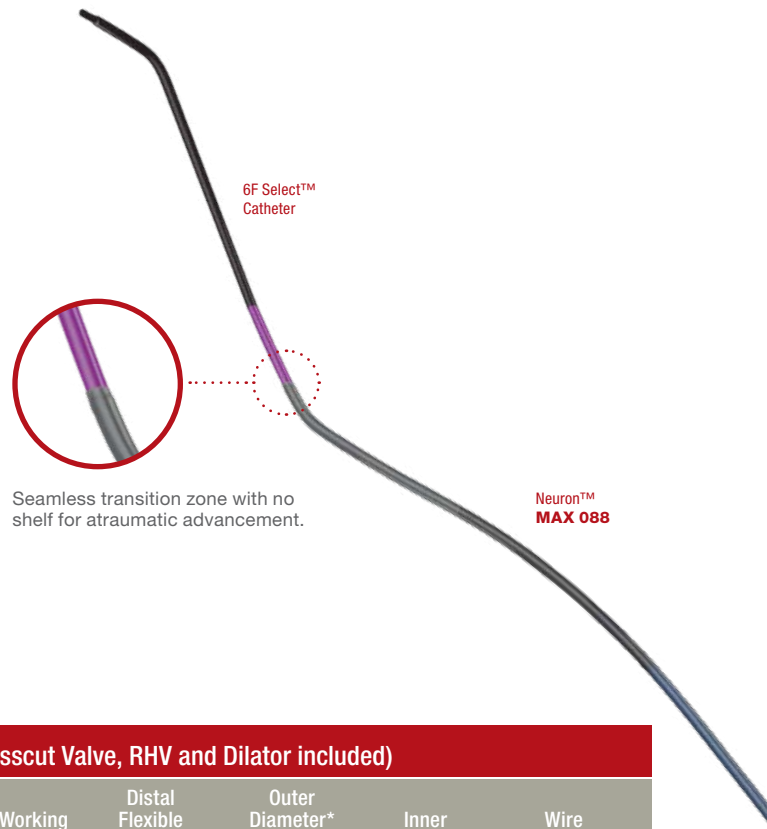

Ordering Information

Neuron™ MAX 6F 088 Lumen Long Sheath (Crosscut Valve, RHV and Dilator included)

Catalog Number	Description	Tip Shape	Working Length	Distal Flexible Zone	Outer Diameter* Proximal / Distal	Inner Diameter	Wire Compatibility
PNML6F088804	6F 088 Neuron MAX Long Sheath, 80/4 Straight		80 cm	4 cm	8F / 8F	.088"	.035/.038"
PNML6F088804M	6F 088 Neuron MAX Long Sheath, 80/4 MP		80 cm	4 cm	8F / 8F	.088"	.035/.038"
PNML6F088904	6F 088 Neuron MAX Long Sheath, 90/4 Straight		90 cm	4 cm	8F / 8F	.088"	.035/.038"
PNML6F088904M	6F 088 Neuron MAX Long Sheath, 90/4 MP		90 cm	4 cm	8F / 8F	.088"	.035/.038"

6F Select™ Catheter

Catalog Number	Description	Tip Shape	Working Length	Distal Flexible Zone	Outer Diameter* Proximal / Distal	Inner Diameter	Wire Compatibility
PNS6F105BER	6F Select Catheter, 105 BER		105 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F105H1	6F Select Catheter, 105 H1		105 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125BER	6F Select Catheter, 125 BER		125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125SIM - NEW!	6F Select Catheter, 125 SIM		125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125H1	6F Select Catheter, 125 H1		125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"
PNS6F125SIMV	6F Select Catheter, 125 SIM-V		125 cm	9 cm	5.6F / 6F / 5F	.040"	.035/.038"

* A mid outer diameter is only listed if applicable to device.



www.penumbrainc.com

Penumbra, Inc. USA
One Penumbra Place
Alameda, CA 94502
USA
1.888.272.4606
T 1.510.748.3200
F 1.510.748.3232
order@penumbrainc.com
info@penumbrainc.com

Penumbra Europe GmbH
Am Borsigturm 44
13507 Berlin
Germany
T +49 30 2005 676-0
F +49 30 2005 676-10
order@penumbrainc.de
info@penumbrainc.de

Penumbra Neuro Australia Pty Ltd
Level 10, 1 Margaret Street
Sydney NSW 2000
Australia
T +61-1300 817 025
F +61-1300 817 026
order.anz@penumbrainc.com