

Technical sheet

Product Name	Lead 12V 8.5Ah battery (151x65x97.5) Yuasa
Reference	NPW45-12L
Manufacturer	Yuasa
Model	Original
Technology	Plomb
Voltage	12.00 V
Capacitance	8.50 A/h
Length	151 mm
Width	65 mm
Height	98 mm
Weight	2.592 kg



Technical sheet

Product Name	Lead 12V 7.2Ah battery (151 x 65 x 100)
Reference	GP1272F2
Manufacturer	Csb
Model	Original
Technology	Plomb
Voltage	12.00 V
Capacitance	7.20 A/h
Length	151 mm
Width	65 mm
Height	100 mm
Weight	2.396 kg



Technical sheet

Product Name	Battery 12V 7Ah (151 x 65 x 94) EXALIUM (EXAG7 - 12)
Reference	EXAG7-12
Manufacturer of the device	EXALIUM
Model	Exalium
Technology	Plomb
Voltage	12.00 V
Capacitance	7.00 A/h
Length	151 mm
Width	65 mm
Height	94 mm
Weight	2.473 kg



Technical sheet

Product Name	Battery 12V 9Ah (151 x 65 x 94) EXALIUM (EXA1236W)
Reference	EXA1236W
Manufacturer of the device	EXALIUM
Model	Exalium
Technology	Plomb
Voltage	12.00 V
Length	151 mm
Width	65 mm
Height	94 mm
Weight	2.572 kg
Suitable for	UPS123607F2



Technical sheet

Product Name	Battery 24V 2.5Ah for Babylog VN5000 DRAEGER
Reference	BABYLOG-O
Manufacturer	DRAGER
Model	Original
Technology	Ni-mh
Voltage	24.00 V
Capacitance	2.50 A/h
Weight	1.405 kg
Suitable for	DRAEGER BABYLOG VN5000 / EVITA INFINITY V500 / EVITA V600 V300




Technical sheet

Product Name	Battery 14.4V 5.2Ah for monitor Infinity Delta XL DRAEGER
Reference	DELTAXL-52
Manufacturer of the device	DRAGER
Model	Exalium
Accumulators	Samsung
Technology	Li-ion
Voltage	14.40 V
Capacitance	5.20 A/h
Weight	0.398 kg
Suitable for	MS18340 / MS30502



Technical sheet

Product Name	3.5V battery 2200 mAh for MEDCHARGE 4000 KAWE
Reference	MEDCHARGE4000
Manufacturer	KAWE
Model	Compatible
Technology	Ni-mh
Voltage	2.50 V
Capacitance	3.00 A/h

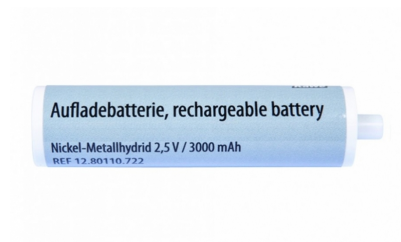

Technical sheet

Product Name	Battery 12V 1.2Ah for ECG travel 12 SPACELABS
Reference	EXA1.2-12T
Manufacturer of the device	SPACELABS MEDICAL
Model	Exalium
Technology	Plomb
Voltage	12.00 V
Capacitance	1.20 A/h
Weight	0.358 kg



Technical sheet


Product Name	Battery 12V 2,3Ah to defibrillateur Defigard 4000 Schiller (4-07-001 - 6Z1)
Reference	EXA2.3-12
Manufacturer of the device	SCHILLER
Model	Exalium
Technology	Plomb
Voltage	12.00 V
Capacitance	2.30 A/h
Weight	0.946 kg
Suitable for	SCHILLER ----> Voir ODAM/BRUKER DEFIBRILLATEUR DG4000





Features :

- ❑ Create UV-C Light with Peak Wavelength of 253.7nm / Additional 185nm for Ozone
- ❑ Use Low Pressure Mercury Vapor to Create Germicidal UV-C Light
- ❑ Wide Range of Industrial & Medical Disinfection Application
- ❑ Available in Tubular Shape & H-Shape [PL Models]
- ❑ Lifetime of 8,000 -10,000 hrs. with 1 Year Warranty



No Flicker



UVC



8000-10000h



S:110W/230V



For Indoor



360°

Model No.	Dimension DxL(mm)	Cap	Rated Power	Spectrum	UV Intensity uw/cm ²	PCS/CTN	CTN MEAS. (cm)
XGYT5-UVC-4W	Φ16x135.9	G5	4W	UVC	11	500	47.5x17.5x39
XGYT5-UVC-6W	Φ16x212.1	G5	6W	UVC	17	500	47.5x24.5x39
XGYT5-UVC-8W	Φ16x288.3	G5	8W	UVC	22	200	47.5x32.5x17
XGYT5-HO-UVC-15W	Φ16x288.3	G5	15W	UVC	50	200	47.5x32.5x17
XGYT5-UVC-14W	Φ16x549	G5	14W	UVC	45	100	60x19.5x20
XGYT5-UVC-21W	Φ16x849	G5	21W	UVC	68	100	90x19.5x20
XGYT5-UVC-28W	Φ16x1149	G5	21W	UVC	92	100	120x19.5x20
XGYT8-UVC-10W	Φ26x331	G13	10W	UVC	30	100	37x29.5x30
XGYT8-UVC-15W	Φ26x437.4	G13	15W	UVC	50	100	47x29.5x30
XGYT8-UVC-18W	Φ26x589.8	G13	18W	UVC	62	25	64x15.5x15.5
XGYT8-UVC-30W	Φ26x894.6	G13	30W	UVC	100	25	94x15.5x15.5
XGYT8-UVC-36W	Φ26x1199.4	G13	36W	UVC	135	25	125x15.5x15.5