

COMPLETE RESPIRATORY DIAGNOSTICS SYSTEM

Full pulmonary function testing lab including recording of all pulmonary volumes and diffusing capacity

YOUR ADVANTAGES

- ⌚ **DIAGNOSE FASTER** - Within a minute obtain results for airway resistance, dynamic/static lung volumes and flow/volume curve
- ⌚ **MAINTENANCE FREE** - Clean and high-precision via ULTRASOUND Technology
- ⌚ **LOGLIFE GAS ANALYZERS** - No replacements or periodic changes needed
- ⌚ **BROAD SPECTRUM OF OPTION** - Multiple programs, making the PowerCube Body+ your comprehensive analysis device
- ⌚ **COST & SPACE** - optimized
- ⌚ **ATS/ERS GUIDELINES** - Fully conforms to Gold Standards
- ⌚ **LFX: USER-FRIENDLY INTUITIVE SOFTWARE** - Latest programming technologies safeguard natural day to day workflow

TECHNICAL DATA

Flow-Measurement

Principle	Ultrasound Transit Time
Range	0 - 18 l/s
Accuracy	Exhalation 0 to 16 L / s: 1.5 % or 0.05 L/s (whichever is greater) Inhalation 0 to 16 L/s: 2.0 % or 0.05 L/s (whichever is greater)
Resistance	<0.05 kPa/(l/s) at 14 l/s

Volume-Measurement

Principle	Digital Integration
Range	Not limited
Accuracy	± 2% or 50 ml/s (whichever is greater)

Mouth Pressure

Principle	Piezo resistive pressure sensor
Range	± 20 kPa
Accuracy	± 1% at 3 kPa

Cabin Pressure

Principle	Piezo resistive pressure sensor
Range	± 3 kPa
Accuracy	± 1%

CO Analyzer

Principle	Non-dispersive Infrared Analyzer
Range	0 - 0.5%
Accuracy	± 1%

He Analyzer

Principle	Ultrasound
Range	0 - 20 % He
Accuracy	± 1%

Weight

Weight of cabin 150 kg

Dimension

W/o door Handle 86 cm x 185 cm x 71 cm



GANSHORN Medizin Electronic GmbH

Industriestraße 6 - 8 · 97618 Niederlauer · Germany
+49 (0) 9771 6222 0 · sales@ganshorn.de

Standards

Quality Management	ISO 13485
FDA	510(k) market clearance
MDD 93/42/ECC	CE Marked
Electrical safety	EN 60601-1 (Third Edition)

Electrical Requirements

Power Consumption	Max. 120 VA
Voltage	24 V
Frequency	50/60 Hz

FEATURES

🔗 COMPLETE PACKAGE


Includes ergonomic trolley, PC, monitor, printer and isolating transformer.

🔗 WHEEL-CHAIR & XL-CABIN AVAILABLE

Increased comfort for exceptional patients.

🔗 MAXIMUM COOPERATION

Panorama view and LED-Lights for maximum patient comfort.

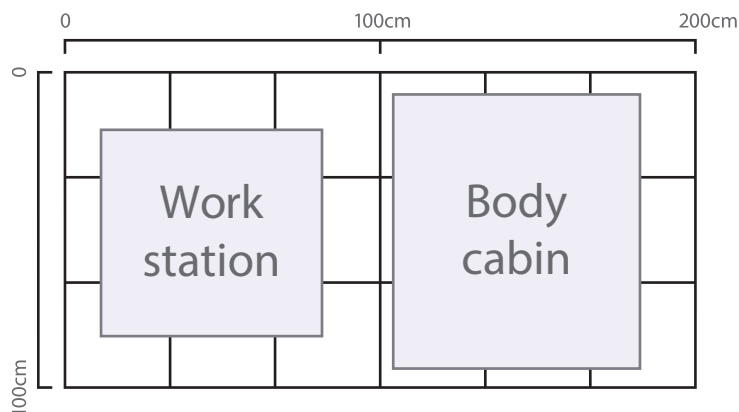

ADMINISTRATIVE PROGRAMS

- SQL Database
- Report Generator
- Multiuser license
- GDT data transfer
- HL7 Interface
- Worklist
- DICOM

STANDARD	OPTION
✓	
✓	
	✓
	✓
	✓
	✓
	✓

MEASUREMENT PROGRAMS & FEATURES

- Bodyplethysmography (TGV)
- Airway resistance (Eff, Tot, 0.5, mid, peak)
- Slow Spirometry
- Forced Spirometry/Flow-Volume
- Single Breath Diffusion
- FRC - Nitrogen Washout
- Offline input of Parameters (FeNO or BloodGas)
- Provocation
- Rhinomanometry
- ROCC
- MIP/MEP (Muscle Strength)
- MVV
- ROS/FOT
- SNIP
- Real-Time Breath

STANDARD	OPTION
✓	
✓	
✓	
✓	
✓	
✓	✓
	✓
	✓
	✓
	✓
	✓
	✓
	✓



wheelchair cabin

dimensions: 130 x 185 x 95 cm
ramp: 140 x 88 cm