


FATHOM-16 Guidewire vs. Terumo Glidewire GT

NEW: Angled Tips Shapes and Radial Lengths!

The market leading FATHOM-16 guidewire just got better.

Torsional Response


In bench testing, FATHOM - 16 Guidewire measured **five times more torque responsive** than either Terumo G.T. Guidewire or the Progreat Ω System Wire.²

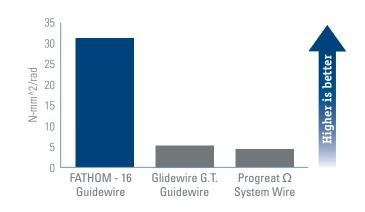



Rail Support

FATHOM - 16 Guidewire offers a minimum of 67% more rail support for improved pushability than Terumo Glidewire G.T. Guidewire or the Progreat Ω System Wire in bench testing.³

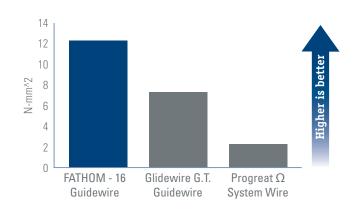

¹ Bench testing data on file at Boston Scientific Corporation. Bench test results not necessarily predictive of clinical performance.

² Test Description: Distal tip of guidewire is constrained in a load cell. The guidewire is rotated at proximal end and the corresponding torque to rotate the distal end is measured. N=15. Std Dev: 2.87, 0.57, 0.29


³ Test Description: 3 point bend test. Force required to bend specimen to an appropriate deflection in the distal segment (proximal to the soft distal tip). N=15. Std Dev: 0.574, 0.574, 0.287

Multiple Sizes for a Variety of Clinical Practice Situations

New Tip Shapes and Lengths FATHOM™ -16 Steerable Guidewires							
UPN	Order Number	Total Length (cm)	Nitinol Tip Length (cm)	Distal Floppy Tip Length (cm)	Proximal/ Distal O.D. (inches)*	Tip Shape	
M001509120	50-912	180	25	10	0.016	Angled	
M001509200	50-920	200	25	10	0.016	Straight	
M001509210	50-921	200	25	10	0.016	Angled	
M001509300	50-930	215	25	10	0.016	Straight	
M001509310	50-931	215	25	10	0.016	Angled	

FATHOM™ -16 Steerable Guidewires							
UPN		Order Number	Total Length (cm)	Nitinol Tip Length (cm)	Distal Floppy Tip Length (cm)	Proximal/ Distal O.D. (inches)*	Tip Shape
M001509	000	50-900	140	25	10	0.016	Straight
M001509	010	50-901	140	35	20	0.016	Straight
M001509	100	50-910	180	25	10	0.016	Straight
M001509	110	50-911	180	35	20	0.016	Straight

FATHOM -14 Steerable Guidewires							
UPN	Order Number	Total Length (cm)	Nitinol Tip Length (cm)	Distal Floppy Tip Length (cm)	Proximal/ Distal O.D. (inhes)*	Tip Shape	
M001508100	50-810	200	35	10	0.014	Straight	
M001508110	50-811	200	35	10	0.014	Angled	
M001508140	50-814	300	35	10	0.014	Straight	
M001508150	50-815	300	35	10	0.014	Angled	

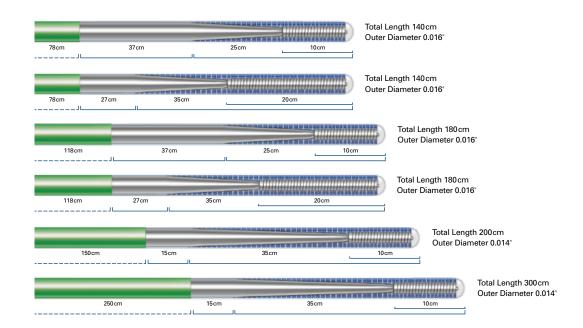

* 0.014" = 0.36 mm & 0.016" = 0.41 mm

FATHOM STEERABLE GUIDEWIRES

FATHOM is a registered or unregistered trademark of Boston Scientific Corporation or its affiliates.

All cited trademarks are the property of their respective owners. CAUTION: The law restricts these devices to sale by or on the order of a physician. Indications, contraindications, warnings and instructions for use can be found in the product labelling supplied with each device. Information for the use only in countries with applicable health authority product registrations. Information contained herein is for distribution outside the U.S. only. Illustrationsfor information purposes – not indicative of actual size or clinical outcome. This material is not approved for use or distribution in France.



www.bostonscientific.eu

© 2017 Boston Scientific Corporation or its affiliates. All rights reserved. DINONC3560EA