


Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Vă rugăm să țineți cont de faptul că datele afișate în acest document PDF au fost generate din catalogul nostru online. Datele complete sunt disponibile în documentația pentru utilizator. În cazul descărcărilor, se aplică Termenii și condițiile generale de utilizare ale companiei noastre.



Test disconnect terminal block, with slide, nom. voltage: 500 V, nominal current: 41 A, connection method: Screw connection, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Avantajele dumneavoastră

- Touch-proof test sockets with 4 mm diameter are already permanently integrated
- The terminal blocks can be fitted with fixed and switchable bridges on both sides

Date comerciale

Număr articol	0311126
Unitate de ambalare	50 Bucată
Cantitate minimă pentru comandă	1 Bucată
Cod produs	BE1233
Pagina de catalog	Pagina 525 (C-1-2019)
GTIN	4017918001315
Greutate pe bucată (inclusiv ambalajul)	38,36 g
Greutate pe bucată (fără ambalaj)	37,02 g
Cod tarifar vamal	85369010
Țara de origine	TR

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Date tehnice

Notes

General

Note	When establishing a connection on the open housing side of a feed-through modular terminal block of the same series and size, the block must be provided with a cover if the expected insulation voltage is >320 V.
	The max. load current must not be exceeded by the total current of all connected conductors.

Product properties

Product type	Test disconnect terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²

Level 1 above 1 below 1

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	11 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section solid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN	0.5 mm ² ... 4 mm ²

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

ferrule with plastic sleeve	
Nominal current	41 A
Maximum load current	50 A (with 10 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	6 mm ²

Dimensions

Width	8.2 mm
Height NS 35/15	66.5 mm
Height NS 35/7,5	59 mm
Height	2.323 "
Height NS 32	64 mm
Length	99.5 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Short-time withstand current 10 mm ²	1.2 kA
Result	Test passed

Power-frequency withstand voltage

Result	Test passed
--------	-------------

Mechanical properties

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Mechanical data

Open side panel	No
-----------------	----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 (+/- 2) rpm
Revolutions	135
Conductor cross section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg
	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s ²) ² /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI)
---------------------------------	---

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

	Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Screw thread	M3


Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Desene

Connection diagram

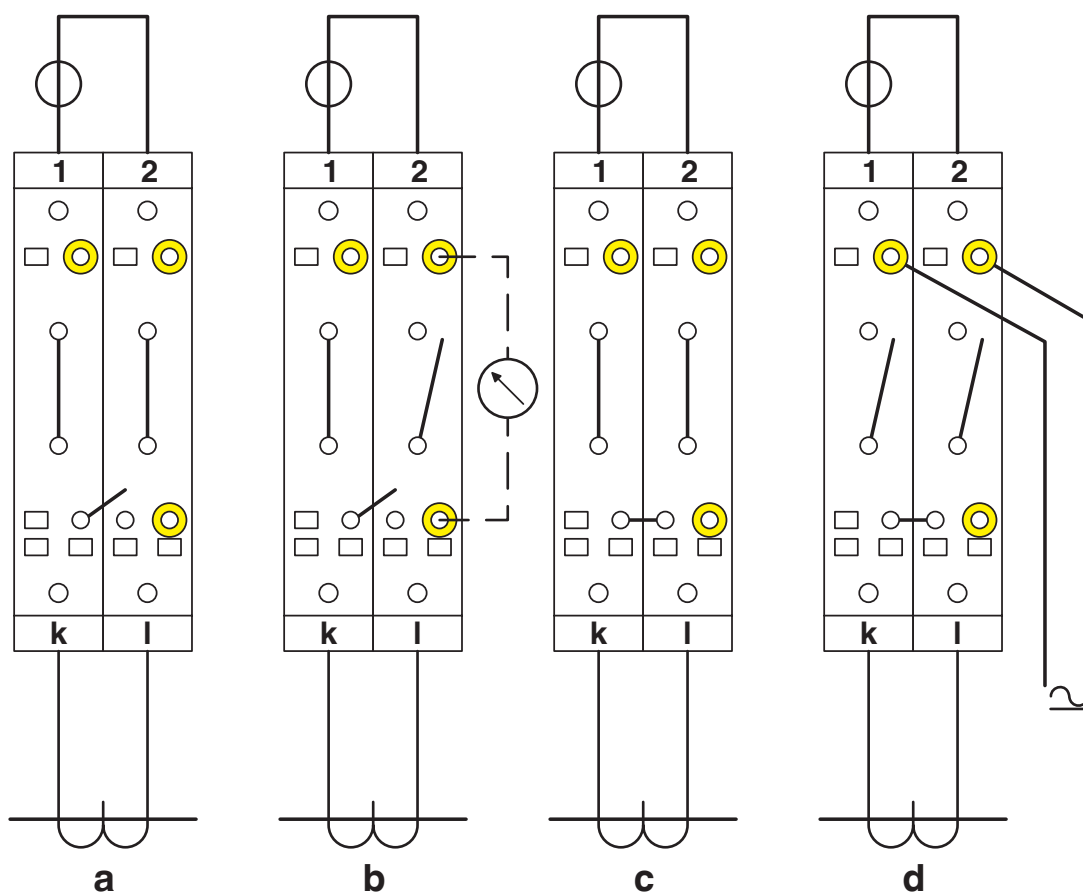

Simple current transformer test circuit

a = normal operation

b = measured value testing

c = transformer testing


d = relay testing

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Schematic diagram

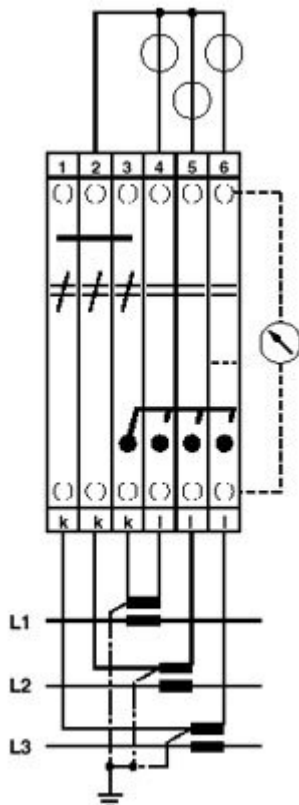

Three-phase linked transducer test set

Circuit diagram




Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Schematic diagram

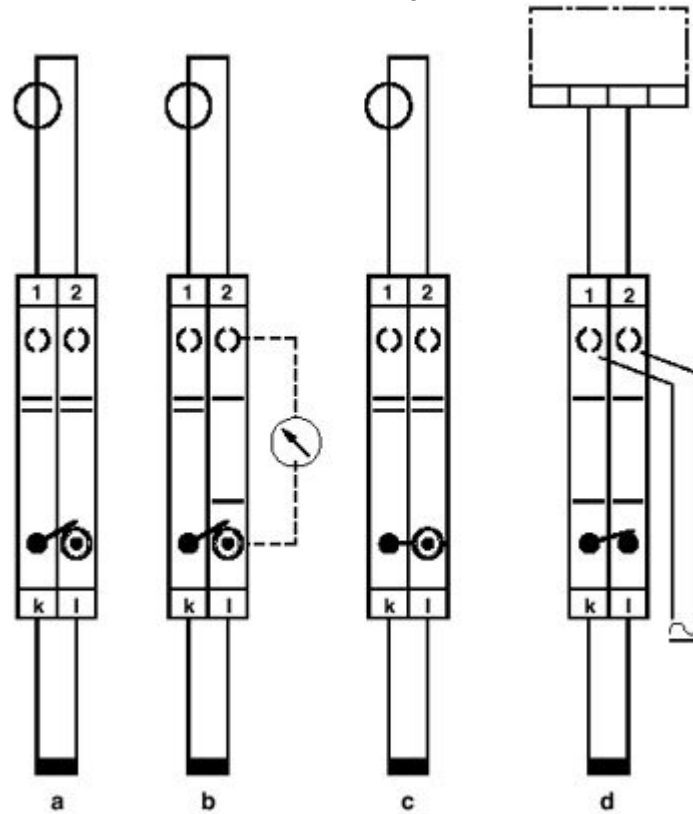

Simple current transformer test circuit


a = normal operation

b = measured value testing

c = transformer testing

d = relay testing

Schematic diagram

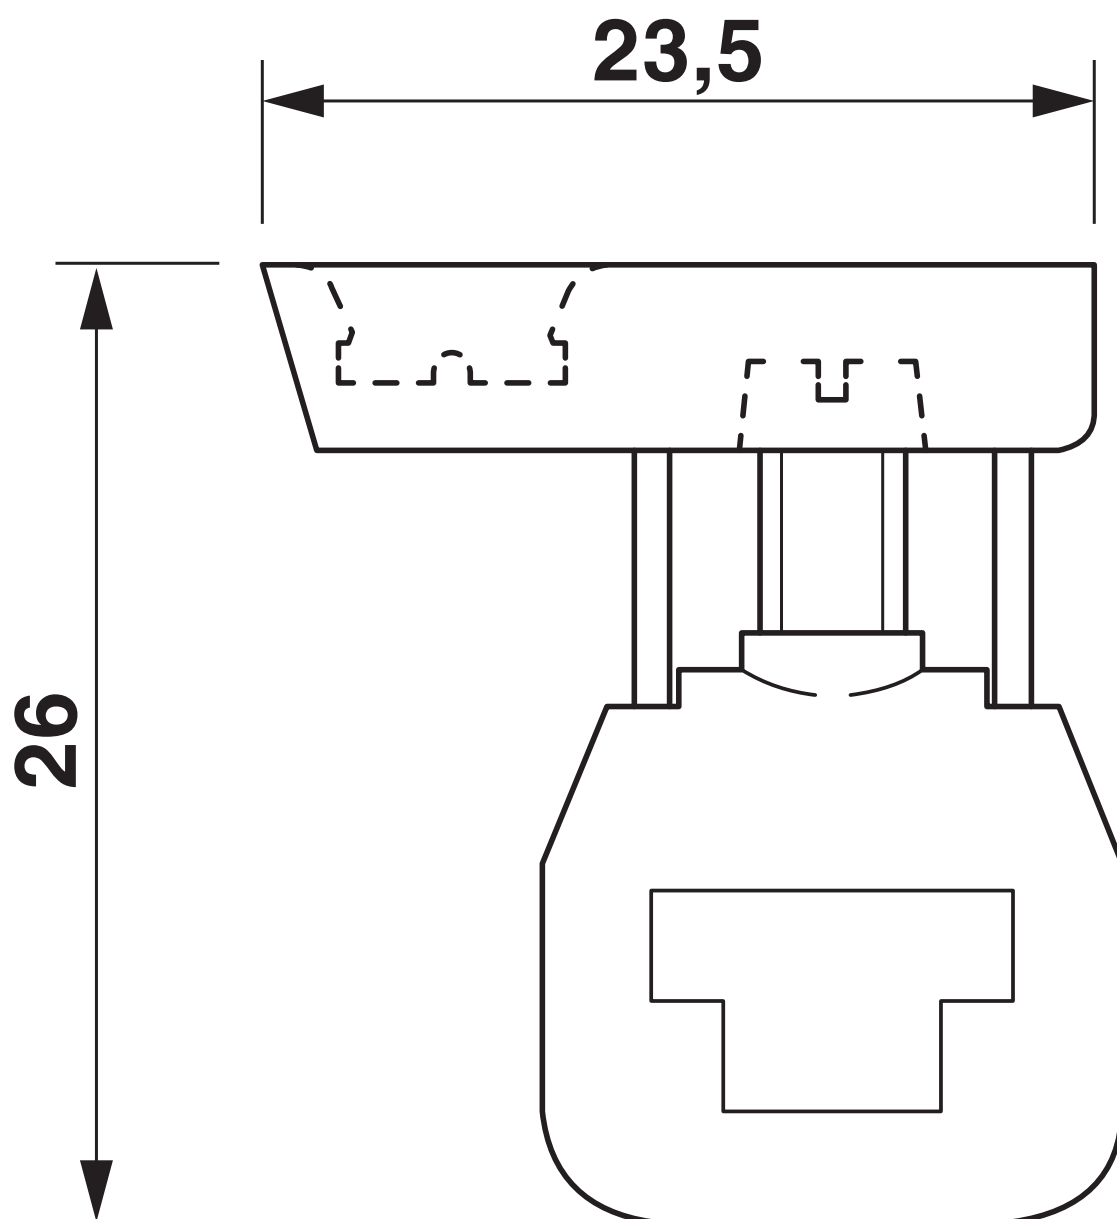


Three-phase transducer test set

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Circuit diagram

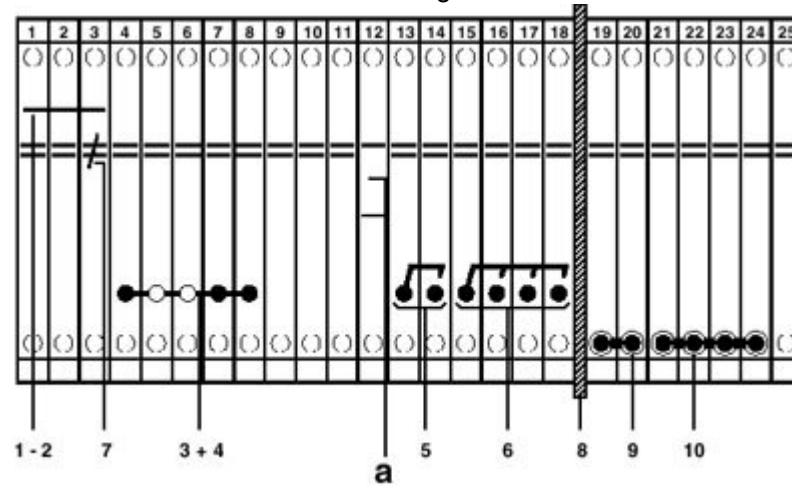

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Aprobări

 CSA ID de înregistrare: 13631				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
	300 V	45 A	26 - 8	-

 IECEE CB Scheme ID de înregistrare: NL-42274				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
	500 V		-	- 6

 EAC ID de înregistrare: RU C-DE.AI30.B.01102				
---	--	--	--	--

 cULus Recognized ID de înregistrare: E60425				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
Use group B				
	300 V	45 A	26 - 8	-
Use group C				
	300 V	45 A	26 - 8	-

 KEMA-KEUR ID de înregistrare: 71-102522				
	Tensiune nominală U_N	Curent nominal I_N	Secțiune transversală AWG	Secțiune transversală mm^2
	500 V		-	- 6

 EAC ID de înregistrare: RU C-DE.BL08.B.00534				
--	--	--	--	--

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Clasificări

ECLASS

ECLASS-9.0	27141126
ECLASS-10.0.1	27141126
ECLASS-11.0	27141126

ETIM

ETIM 8.0	EC000902
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Accesorii



Indicație: Funcționarea produsului poate fi restricționată în cazul utilizării împreună cu unul din accesorii prezentate mai jos.

Bridge bar isolator

Bridge bar isolator - IS-K 10 - 1303337

<https://www.phoenixcontact.com/ro/produse/1303337>



Bridge bar isolator, color: gray

Bridge

Bridge - ISSBI 10- 8 - 0301534

<https://www.phoenixcontact.com/ro/produse/0301534>



Bridge, pitch: 8 mm, color: silver



Max. current carrying capacity: 35 A

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Fixed bridge

Fixed bridge - FBI 2- 8 - 0200020

<https://www.phoenixcontact.com/ro/produse/0200020>



Fixed bridge, pitch: 8 mm, color: silver

Fixed bridge

Fixed bridge - FBI 4- 8 - 0200046

<https://www.phoenixcontact.com/ro/produse/0200046>



Fixed bridge, pitch: 8 mm, color: silver

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Fixed bridge

Fixed bridge - FBI 3- 8 - 0200059

<https://www.phoenixcontact.com/ro/produse/0200059>



Fixed bridge, pitch: 8 mm, color: silver

Fixed bridge

Fixed bridge - FB 10- URTK/SP - 0311663

<https://www.phoenixcontact.com/ro/produse/0311663>



Fixed bridge, pitch: 8.2 mm, color: silver

 Max. current carrying capacity: 50 A

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Fixed bridge

Fixed bridge - FBI 10- 8 - 0203263

<https://www.phoenixcontact.com/ro/produse/0203263>

Fixed bridge, pitch: 8 mm, color: silver



 Max. current carrying capacity: 50 A

Insertion bridge

Insertion bridge - EB 2- 8 - 0202154

<https://www.phoenixcontact.com/ro/produse/0202154>

Insertion bridge, pitch: 8 mm, color: gray



Test disconnect terminal block - URTK/SP


0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Insertion bridge

Insertion bridge - EB 3- 8 - 0202141

<https://www.phoenixcontact.com/ro/produse/0202141>




Insertion bridge, pitch: 8 mm, color: gray

Insertion bridge

Insertion bridge - EB 10- 8 - 0202138

<https://www.phoenixcontact.com/ro/produse/0202138>



Insertion bridge, pitch: 8 mm, color: gray

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Switching lock

Switching lock - S-URTK/SP - 0311155

<https://www.phoenixcontact.com/ro/produse/0311155>

Switching lock, length: 12 mm, width: 8.2 mm, color: white



Switching jumper

Switching jumper - SB 4-URTK/SP - 0360025

<https://www.phoenixcontact.com/ro/produse/0360025>

Switching jumper, pitch: 8.2 mm, color: silver



 Max. current carrying capacity: 35 A

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Switching jumper

Switching jumper - SB 2-URTK/SP - 0360012

<https://www.phoenixcontact.com/ro/produse/0360012>

Switching jumper, pitch: 8.2 mm, color: silver



 Max. current carrying capacity: 35 A

Insertion bridge

Insertion bridge - EB 4- 8 - 0202142

<https://www.phoenixcontact.com/ro/produse/0202142>

Insertion bridge, pitch: 8 mm, color: gray



 Max. current carrying capacity: 41 A

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Insertion bridge

Insertion bridge - EB 1/3/5/7-8 - 3072340

<https://www.phoenixcontact.com/ro/produse/3072340>

Insertion bridge, pitch: 16.4 mm, pin assignment: 1, 3, 5, 7, color: gray



 Max. current carrying capacity: 41 A

Insertion bridge

Insertion bridge - EB 1/3/5-8 - 3072341

<https://www.phoenixcontact.com/ro/produse/3072341>

Insertion bridge, pitch: 16.4 mm, pin assignment: 1,3,5, color: gray



 Max. current carrying capacity: 41 A

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Short-circuit connector

Short-circuit connector - KSSI 4-8 - 3000735

<https://www.phoenixcontact.com/ro/produse/3000735>



Short-circuit connector, pitch: 8 mm, color: black

Short-circuit connector

Short-circuit connector - KSSI 2-8 - 3000722

<https://www.phoenixcontact.com/ro/produse/3000722>



Short-circuit connector, pitch: 8 mm, color: black

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Partition plate

Partition plate - ATP-URTK/SP - 0311139

<https://www.phoenixcontact.com/ro/produse/0311139>

Partition plate, length: 99 mm, width: 2 mm, height: 64 mm, color: gray



Marker card

Marker card - SBS 8:UNBEDRUCKT - 1007235

<https://www.phoenixcontact.com/ro/produse/1007235>

Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm



Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Screwdriver

Screwdriver - SZS 1,0X4,0 VDE - 1205066

<https://www.phoenixcontact.com/ro/produse/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

Cover profile

Cover profile - AP-ME METER - 3034361

<https://www.phoenixcontact.com/ro/produse/3034361>



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m

Test disconnect terminal block - URTK/SP


0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Cover profile carrier

Cover profile carrier - APH-ME - 3034374

<https://www.phoenixcontact.com/ro/produse/3034374>



Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, can be sealed as an option

Cover profile carrier

Cover profile carrier - APT-ME - 3034358

<https://www.phoenixcontact.com/ro/produse/3034358>



Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Covering hood

Covering hood - AH-ME - 3240265

<https://www.phoenixcontact.com/ro/produse/3240265>



Cover, for the contact- and dust-protected encapsulation of the components

Separating plate

Separating plate - TS-UT 6-T/SP - 3072821

<https://www.phoenixcontact.com/ro/produse/3072821>



Separating plate, length: 105.2 mm, width: 1 mm, height: 67.5 mm, color: gray

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail perforated

DIN rail perforated - NS 32 PERF 2000MM-VPE 10 - 1201002

<https://www.phoenixcontact.com/ro/produse/1201002>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

DIN rail, unperforated

DIN rail, unperforated - NS 32 UNPERF 2000MM-VPE 10 - 1201015

<https://www.phoenixcontact.com/ro/produse/1201015>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/ro/produse/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/ro/produse/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/ro/produse/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/ro/produse/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/ro/produse/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/ro/produse/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/ro/produse/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/ro/produse/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/ro/produse/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



DIN rail perforated

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730

<https://www.phoenixcontact.com/ro/produse/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714

<https://www.phoenixcontact.com/ro/produse/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail perforated

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602

<https://www.phoenixcontact.com/ro/produse/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM-VPE 10 - 1204135

<https://www.phoenixcontact.com/ro/produse/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756

<https://www.phoenixcontact.com/ro/produse/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail perforated

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599

<https://www.phoenixcontact.com/ro/produse/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586

<https://www.phoenixcontact.com/ro/produse/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM-VPE 10 - 1201895

<https://www.phoenixcontact.com/ro/produse/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

End cap

End cap - NS 35/15 CAP - 1206573

<https://www.phoenixcontact.com/ro/produse/1206573>

DIN rail end piece, for DIN rail NS 35/15



Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

DIN rail, unperforated

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM-VPE 10 - 1201798

<https://www.phoenixcontact.com/ro/produse/1201798>




DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

Zack marker strip

Zack marker strip - ZB 8:UNBEDRUCKT - 1052002

<https://www.phoenixcontact.com/ro/produse/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Test disconnect terminal block - URTK/SP


0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Zack marker strip

Zack marker strip - ZB 8 CUS - 0825011

<https://www.phoenixcontact.com/ro/produse/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 - 0818072

<https://www.phoenixcontact.com/ro/produse/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 CUS - 0824597

<https://www.phoenixcontact.com/ro/produse/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 - 0828740

<https://www.phoenixcontact.com/ro/produse/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 CUS - 0829616

<https://www.phoenixcontact.com/ro/produse/0829616>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

Zack marker strip

Zack marker strip - ZB 8,LGS:FORTL.ZAHLEN - 1052015

<https://www.phoenixcontact.com/ro/produse/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

Zack marker strip

Zack marker strip - ZB 8,QR:FORTL.ZAHLEN - 1052028

<https://www.phoenixcontact.com/ro/produse/1052028>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Marker for terminal blocks

Marker for terminal blocks - ZB 8,LGS:L1-N,PE - 1052413

<https://www.phoenixcontact.com/ro/produse/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Test disconnect terminal block - URTK/SP

0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

End clamp

End clamp - CLIPFIX 35 - 3022218

<https://www.phoenixcontact.com/ro/produse/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/ro/produse/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

Test disconnect terminal block - URTK/SP

0311126


<https://www.phoenixcontact.com/ro/produse/0311126>

End clamp

End clamp - E/NS 35 N - 0800886

<https://www.phoenixcontact.com/ro/produse/0800886>

End clamp, width: 9.5 mm, color: gray




End clamp

End clamp - E/UK - 1201442

<https://www.phoenixcontact.com/ro/produse/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



Test disconnect terminal block - URTK/SP



0311126

<https://www.phoenixcontact.com/ro/produse/0311126>

End clamp

End clamp - E/UK 1 - 1201413

<https://www.phoenixcontact.com/ro/produse/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

Phoenix Contact 2022 © - Toate drepturile rezervate

<https://www.phoenixcontact.com>

PHOENIX CONTACT România

Splaiul Unirii 165 Timpuri Noi Square TNO1, Etaj 1

Bucuresti 030133

+40 21 350 88 12 - 3

sales.ro@phoenixcontact.com