



· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

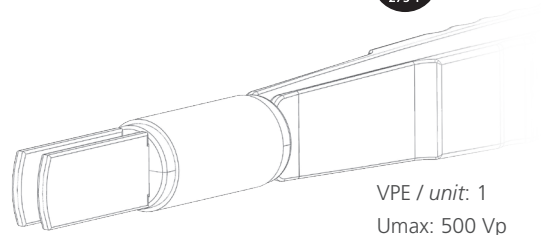

VPE / unit: 1
Umax: 500 Vp

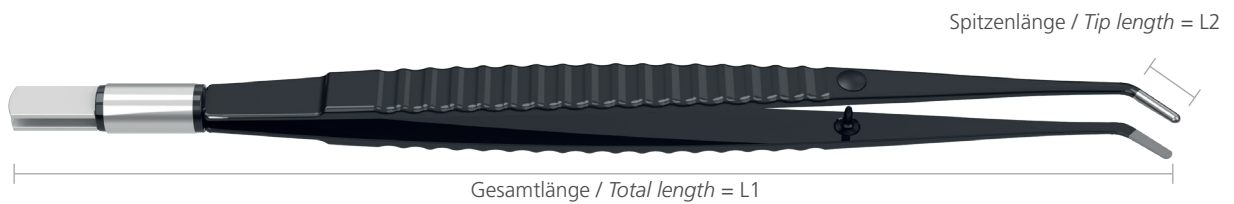


Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	-	-	95042	-	-
L1	-	-	145 mm	-	-
L2	-	-	8 mm	-	-
Artikel-Nr. item code	95036	95013	95014	-	-
L1	165 mm	165 mm	165 mm	-	-
L2	6 mm	8 mm	8 mm	-	-
Artikel-Nr. item code	95187	95089	95090	95088	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95103	95104	95001	95007	95058
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	8 mm	8 mm	8 mm	8 mm	8 mm
Artikel-Nr. item code	95128	95122	95024	95125	-
L1	225 mm	225 mm	225 mm	225 mm	-
L2	8 mm	8 mm	8 mm	8 mm	-


· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

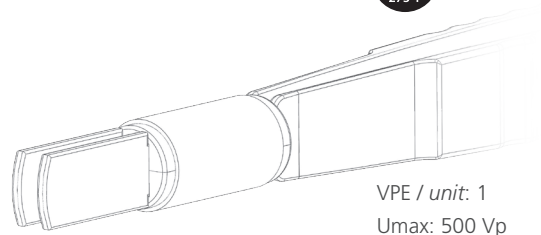

VPE / unit: 1
Umax: 500 Vp

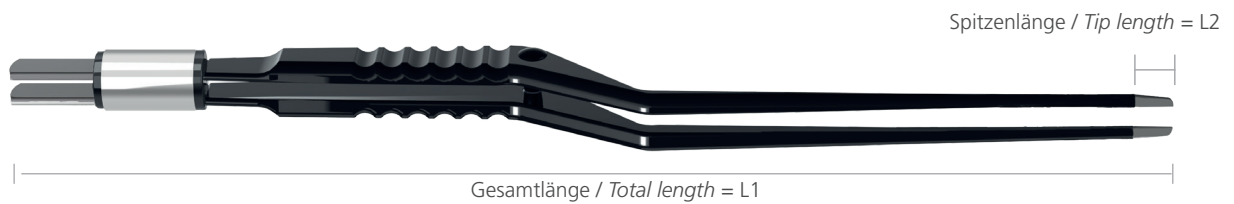

Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	95116	95017	95018	-	-
L1	165 mm	165 mm	165 mm	-	-
L2	6 mm	6 mm	6 mm	-	-
Artikel-Nr. item code	95194	95092	95091	95093	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	6 mm	6 mm	8 mm	-
Artikel-Nr. item code	95008	95109	95002	95034	95059
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	6 mm	6 mm	6 mm	8 mm	8 mm
Artikel-Nr. item code	95045	95031	95131	95132	-
L1	220 mm	220 mm	220 mm	220 mm	-
L2	6 mm	6 mm	6 mm	8 mm	-
Artikel-Nr. item code	-	95197	95196	95204	-
L1	-	240 mm	240 mm	240 mm	-
L2	-	6 mm	6 mm	6 mm	-