



R32
eco REFRIGERANT

5 ani
garantie
compresor


Specificatii tehnice ale aerului conditionat tip inverter split DC cu agent frigorific R32, noua eficienta pentru Europa

MODEL		TCL	R 32 - 12000 BTU
Tip			pompa de caldura
Tip control			telecomanda
Capacitatea de racire declarata	W		3500(1000~3870)
Capacitatea de incalzire declarata	W		3520(1000~3950)
SEER declarat *	W/W		6.5
Clasa energetica			A++
SCOP mediu declarat **	W/W		4
Clasa energetica			A+
Consumul anual de energie	Racire	kwh/a	188.4615385
	Incalzire	kwh/a	840
Indepartarea umiditatii	l/h		1.1
Putere sonora interior (H/ML/Mute)	dB(A)		50/43/35/32
Putere sonora exterior	dB(A)		60
Presiune sonora la interior	dB(A)		40/33/25/22
Presiune sonora exterior	dB(A)		50
Date electrice			
Alimentare			220-240V~/50Hz/1P
Domeniu tensiune		V	165~265
Curent	Racire	A	4.7(1.5 ~ 6.7)
	Incalzire	A	4.5(1.5 ~ 7.0)
Putere	Racire	W	1010(290 ~ 1320)
	Incalzire	W	990(290 ~ 1400)
Sistemul refrigerant			
Agent frigorific	Kg		R32/0.55Kg
Compresor	Tip		Rotativ
	Produsor		GMCC
Circulatia aerului la interior		m ³ /h	550/550
Tip ventilator interior			turbina axial-radial
Tip ventilator exterior			polipropilena

It's COOOOL !!!



Ambasador de brand
Neymar Jr.

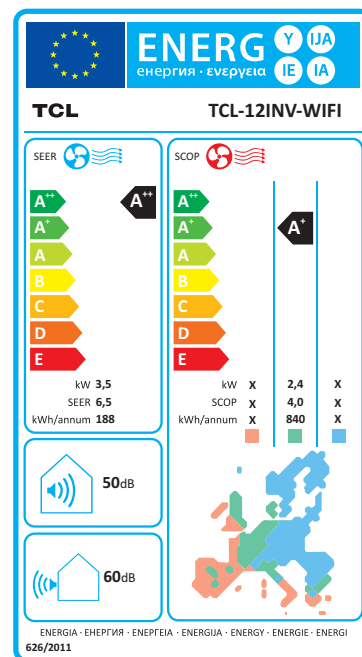

Conexiuni			
Cabluri de conectare	Nr. x Sectiune		4×1.0mm ²
Dispozitiv de expansiune			Capilar
Conducta de conectare	Gaz	Inch.	3/8"
	Lichid	Inch.	1/4"
Altele			
Domeniul de aplicare	m ²		14~22
Lungimea max. a conductei refriger.	m		25
Dif. de nivel max.	m		10
Domeniul temperaturii de lucru	°C		16-31
Domeniul temperaturii ambientale	Exterior	°C	Racire:0-53/Incalzire:-20-30
	Interior	°C	Racire:17-32/Incalzire:0-30
Dimensiuni nete	Interior	mm	780×250×205
(W x H x D)	Exterior	mm	715x240x492
Masa neta	Interior	kg	8.5
	Exterior	kg	22
Dimensiuni de ambalare	Interior	mm	850x320x275
(W x H x D) w/o cond.	Exterior	mm	818×325×520
w/i conducta	Exterior	mm	818×325×520
Masa bruta	Interior	kg	10.5
	Exterior	kg	25(fara kit)/26(cu kit)

* Rata eficientei energetice pe sezon

**Coeficient de performanta pe sezon