



EVX Series

EVX 12400 Datasheet

12V Top Terminal VRLA-AGM

Specifications

Voltage (Vdc)	12
Nominal Capacity (1.75 VPC @ 25°C)	40 Ah @20hr-rate
Ah Capacity (8-Hr 1.75 VPC @ 25°C)	31.52
Ah Capacity (20-Hr 1.75 VPC @ 25°C)	40.00
Ah Capacity (8-Hr 1.80 VPC @ 25°C)	30.56
Max Charge Current (A)	12.00
Max Discharge Current (A)	400
Short Circuit Current (A)	1082
Internal Resistance (mΩ)	Approx. 8.2
Terminal Type	I2 terminal to accept M6 bolt
Terminal Torque	51.7±10.3 Kg·cm / 44.9±9.0 Lbf·in / 5.1±1.0 N·m
Container Material	ABS (UL 94-HB)
Weight (kg. / lb., Approx.)	13.20 / 29.07
Length (L) (mm / in)	197.0±2.0 / 7.76±0.08
Width (W) (mm / in)	165.0±2.0 / 6.50±0.08
Height (H) (mm / in)	170.4±2.0 / 6.71±0.08
Design Life	400 cycles @ 100%DOD at 25°C 1800 cycles @ 30%DOD at 25°C
Operating Temperature	Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F-122°F) Charge/Storage: -15°C - 40°C (5°F - 104°F)
Float Charging Voltage	--
Eq. Charging Voltage	14.4 - 15.0 Vdc/battery 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).



Valve Regulated Lead Acid
(VRLA) Battery

Maintenance-Free, Absorbent
Glass Mat (AGM) Technology for
Efficient Gas Recombination of
up to 99%

Pure Lead Construction and
Proprietary Elements

Designed for E-mobility or deep
cycling applications

Built in Accordance with IEC
60254-1:2005 / IEC60254-
2:2008 and UL1989
Recognized (MH14533)





EVX Series

EVX 12400 Datasheet


12V Top Terminal VRLA-AGM

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
10.02V (1.67 VPC)	37.0	27.5	22.3	16.3	13.0	9.47	7.52	6.24	5.34	4.18	3.49	2.12
10.50V (1.75 VPC)	34.8	25.9	21.0	15.3	12.3	8.88	7.09	5.91	5.05	3.94	3.30	2.00
10.80V (1.80 VPC)	33.7	25.1	20.3	14.8	11.9	8.58	6.89	5.70	4.88	3.82	3.17	1.94

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
10.02V (1.67 VPC)	444	330	268	196	157	113	90.1	74.6	63.1	48.4	40.0	21.6
10.50V (1.75 VPC)	417	311	252	184	147	107	84.5	69.9	59.2	45.5	37.6	20.3
10.80V (1.80 VPC)	404	300	243	178	143	103	81.5	67.4	57.1	44.0	36.4	19.6

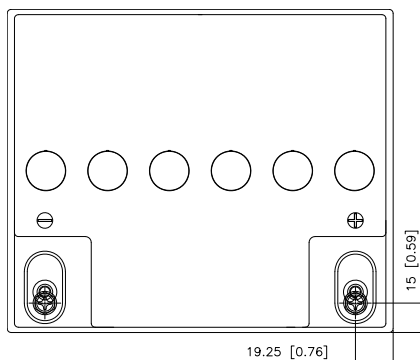

Detail A Drawing(4:1)

