

NEW DOBLÒ CARGO.



TECHNICAL SPECIFICATIONS AND MAIN EQUIPMENT



DOBLÒ CARGO

Technical specifications

	95 MPI	120 T-JET	120 T-JET NATURAL POWER
Engine			
No. of cylinders, layout	4 in line, transverse front	4 in line, transverse front	4 in line, transverse front
Displacement (cm ³)	1368	1368	1368
Emissions level	Euro 6 / Euro 6 with StartStop	Euro 6	Euro 6
Compression ratio	11:01	9.8:1	9.8:1
EC max. power: kW (HP) at rpm	70 (95) 6000	88 (120) 5000	88 (120) 5000
EC max. torque: Nm at rpm	127 (12.9) 4500	206 (21.0) 2000	206 (21.0) 2000
Timing system (control)	2 OHC (toothed belt) with hydraulic tappets 4 valves per cylinder		
Fuel	petrol (EN228)	petrol (EN228)	petrol (EN228) / methane
Supply	timed sequential, returnless system	Multipoint electronic injection (MPI), sequential, phased, turbo and intercooler, returnless system	electronic timed sequential Multipoint injection (MPI), specific injection for methane, turbo and intercooler, returnless system
Ignition	electronic, static, integrated with the injection	electronic, static, integrated with the injection	electronic, static, integrated with the injection
Transmission			
Drive	front	front	front
Clutch	dry, single plate with cup engagement spring and hydraulic operation	dry, single plate with cup engagement spring and hydraulic operation	dry, single plate with cup engagement spring and hydraulic operation
Gearbox: number of gears	5 + R	6 + R	6 + R
Steering			
Type	rack and pinion with hydraulic power steering	rack and pinion with hydraulic power steering	rack and pinion with hydraulic power steering
Turning circle (kerb to kerb)	11.2/12.5 (Maxi)	11.2/12.5 (Maxi and XL)	11.2/12.5 (Maxi)
Braking system - D (self-ventilated disc) - T (drum)			
Type	hydraulic system with 2 crossover independent circuits		
Front: ø (mm)	D 305	D 305	D 305
Rear: ø mm	T 254	T 254	T 254
Brake servo: ø	10"	10"	10"
Suspension			
Front	independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar		
Rear	Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to version)	independent bi-link, with coil springs, telescopic shock absorbers with dual calibration and anti-roll bar	independent bi-link, with coil springs, telescopic shock absorbers with dual calibration and anti-roll bar
Wheels			
Tyres	195/60 R 16	195/60 R 16	195/60 R 16
Electrical system (12 V)			
Battery capacity (Ah)	40/50/60/63/72	50/60	50/60
Alternator current (A)	70/90/105/120	105/120	50/60
Refuelling			
Fuel tank capacity (litres) / (kg)	60	60	22
			95 l/16.15 kg * 130 l/22.1 kg **
Performance and consumption			
- Cargo short wheelbase	E6	E6 with S&S	E6
Top speed (km/h)	161	161	172
Combined consumption (l/100 km)	7.3	7.0	7.2
CO ₂ emissions (g/km)	169	163	169
			E6 - Petrol ■ E6 - Methane ■
			172
			173
			134

* (kg/100 km)

* 4 cylinders

** 5 cylinders


■ values referring to Cargo short wheelbase with increased payload

4.9*

75 / 90 MULTIJET II	90 MULTIJET II COMFORT MATIC	100 / 105 MULTIJET II	135 MULTIJET II			
4 in line, transverse front 1248 Euro 5+ with DPF / Euro 5+ with DPF and StartStop 16.8:1 55/66 (75/90) 4000 200 (20.4) 1500	4 in line, transverse front 1598 Euro 5+ with DPF and StartStop 16.5:1 66 (90) 4000 200 (20.4) 1500	4 in line, transverse front 1598 Euro 5+ with DPF / Euro 5+ with DPF and StartStop 16.5:1 73/77 (100/105) 4000 290 (29.6) 1500	4 in line, transverse front 1956 Euro 5+ with DPF 16.5:1 99 (135) 3500 320 (32.6) 1500			
2 OHC (with chain) with hydraulic tappets 4 valves per cylinder diesel fuel for motor vehicles (EN 590)	2 OHC (toothed belt) with hydraulic tappets 4 valves per cylinder diesel fuel for motor vehicles (EN 590)	2 OHC (toothed belt) with hydraulic tappets 4 valves per cylinder diesel fuel for motor vehicles (EN 590)	2 OHC (toothed belt) with hydraulic tappets 4 valves per cylinder diesel fuel for motor vehicles (EN 590)			
MultiJet II "Common Rail" direct injection with electronic control, turbo and intercooler by compression	MultiJet II "Common Rail" direct injection with electronic control, turbo and intercooler by compression	MultiJet II Common Rail direct injection with electronic control, turbo and intercooler by compression	MultiJet II Common Rail direct injection with electronic control, turbo and intercooler by compression			
front dry, single plate with cup engagement spring and hydraulic operation 5 + R	front dry, single plate with electro-hydraulic activation 5 + R with electronically managed electro-hydraulic control system	front dry, single plate with cup engagement spring and hydraulic operation 6 + R	front dry, single plate with cup engagement spring and hydraulic operation 6 + R			
rack and pinion with hydraulic power steering 11.2/12.5 (Maxi)	rack and pinion with hydraulic power steering 11.7 / 13 (Maxi and XL)	rack and pinion with hydraulic power steering 11.2/12.5 (Maxi and XL)	rack and pinion with hydraulic power steering 11.2/12.5 (Maxi and XL)			
D 284 - D 305 (Maxi and increased payload) T 228 - T 254 (Maxi, increased payload and Combi) 10"	D 284 - D 305 (Maxi and increased payload) T 228 - T 254 (Maxi, increased payload and Combi) 10"	D 284 - D 305 (Maxi and increased payload) T 228 - T 254 (Maxi, increased payload and Combi) 10"	D 305 T 254 10"			
independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to version)	independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to version)	independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to version)	independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to version)			
185/65 R 15 - 195/65 R 15 (Combi) 195/60 R 16 (Maxi and increased capacity)	185/65 R 15 - 195/65 R 15 (Combi) 195/60 R 16 (Maxi and increased capacity)	185/65 R 15 - 195/65 R 15 (Combi) 195/60 R 16 (Maxi and increased capacity)	195/60 R 16			
50/60/63/70/72 70/90/120	72 100/120/150	60/70/72 100/120/150	60/70/72 100/120/150			
60	60	60	60			
E5+ with DPF E5+ with DPF and S&S 145 with 75 HP 158 with 90 HP 5.0 133	E5+ ECOJET 90 HP with DPF, S&S and ECOPack 158 4.4 126	E5+ with DPF and S&S 158 4.9 115	E5+ with DPF E5+ with DPF, S&S and ECOPack 164 5.4 143	E5+ ECOJET with DPF, S&S and ECOPack 164 5.2 136	E5+ with DPF 164 4.7 124	E5+ with DPF 179 5.9 154

DOBLÒ CARGO

Standard short wheelbase

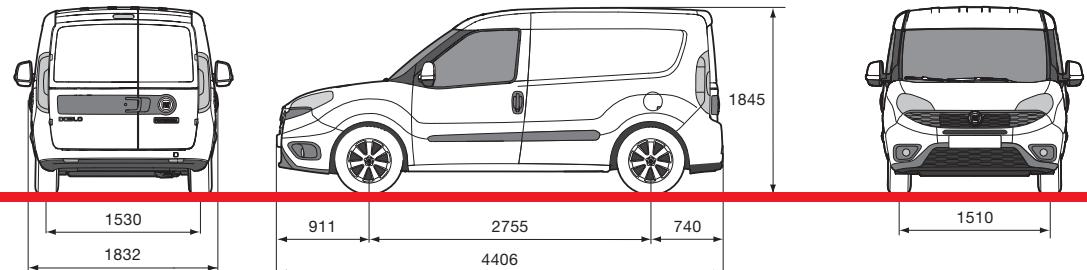

External dimensions (mm)

Wheelbase	2755
Length	4406
Width	1832
Front track	1510
Rear track	1530
Maximum height (unladen)	1845
Front projection	911
Rear projection	740

Rear door (mm)

Width	1231
Height	1250

Sliding side door (mm)

Width	700
Height	1175

Load compartment (mm)

Length	1820
Width	1714
Width between wheel arches	1230
Height	1305
Load threshold height (unladen)	545

Load compartment capacity (m³)

Volume	3.4 - 3.8*
--------	------------

Weights

Motorizzazioni	Standard van						Increased payload van					
	95 MPI	75 - 90 MultiJet II	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II	95 MPI	120 T-Jet	75 - 90 MultiJet II	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II	120 T-Jet Natural Power
Vehicle weight ^a (tare) (kg)	1280	1320	1350	1350	1403	1310	1365	1350	1420	1420	1430	1463
Payload including driver (kg)	750	750	750	750	750	900	1005	1005	1005	1005	1005	980
GVW (kg)	2030	2070	2100	2100	2153	2210	2370	2355	2425	2425	2435	2443
Max. towable weight (kg)	1000	1000	1300	1300	1500	1000	1000	1000	1300	1300	1500	1000

Fuel consumption - Emissions

Engine versions	Standard van						Increased payload van					
	95 MPI	75 - 90 MultiJet II			90 MultiJet II Comfort-Matic			100 - 105 MultiJet II			135 MultiJet II	
E6	E6 S&S	E5+ DPF	E5+ DPF S&S	E5+ 90 HP ECOJet DPF S&S Ecopack	E5+ DPF S&S	E5+ DPF	E5+ DPF	E5+ DPF S&S	E5+ DPF S&S Ecopack	E5+ DPF S&S	E5+ DPF	E5+ DPF
Fuel	petrol	petrol	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel
Urban consumption (l/100 km)	9.9	9.2	6.5	5.9	5.2	5.5	6.7	6.1	5.4	5.4	7.2	
Extra-urban consumption (l/100 km)	5.8	5.7	4.2	4.2	3.9	4.6	4.7	4.6	4.3	4.3	5.1	
Combined consumption (l/100 km)	7.3	7.0	5.0	4.8	4.4	4.9	5.4	5.2	4.7	4.7	5.9	
CO ₂ emissions (g/km)	169	163	133	126	115	130	143	136	124	124	154	


Fuel consumption - Emissions

Engine versions	Standard van						Increased payload van						
	95 MPI	120 T-Jet	75-90 MultiJet II			90 MultiJet II Comfort-Matic			100 - 105 MultiJet II			135 MultiJet II	120 T-Jet Natural Power
E6	E6 S&S	E6	E5+ DPF	E5+ DPF S&S	E5+ 90 HP ECOJet DPF S&S Ecopack	E5+ DPF S&S	E5+ DPF	E5+ DPF	E5+ DPF S&S	E5+ DPF S&S Ecopack	E5+ DPF	E6	
Fuel	petrol	petrol	petrol	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	petrol	methane
Urban consumption (l/100 km)	10.4	9.7	9.5	6.5	5.9	5.2	5.6	6.8	6.2	5.5	7.2	9.7	6.5 ^v
Extra-urban consumption (l/100 km)	5.8	5.9	5.9	4.2	4.2	3.9	4.7	4.7	4.6	4.3	5.1	6.1	4.0 ^v
Combined consumption (l/100 km)	7.5	7.3	7.2	5	4.8	4.4	5.0	5.5	5.2	4.5	5.9	7.4	4.9 ^v
CO ₂ emissions (g/km)	174	168	169	133	126	115	133	144	137	125	154	173	134

* With passenger seat folded down and swivel partition

^a Referred to basic versions without optional equipment

^v (kg/100 km)

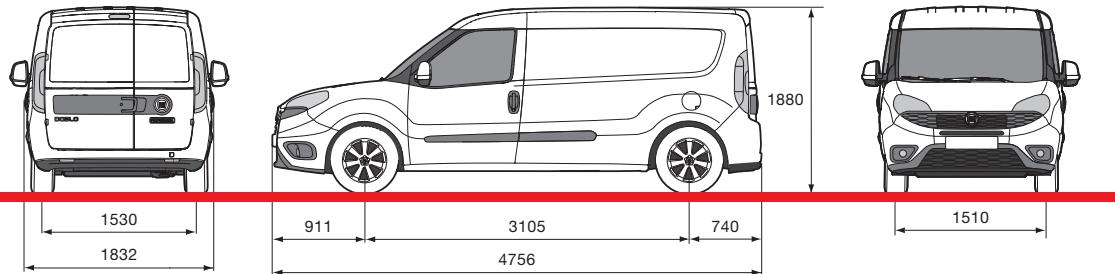

DOBLÒ CARGO Maxi

External dimensions (mm)

Wheelbase	3105
Length	4756
Width	1832
Front track	1510
Rear track	1530
Maximum height (unladen)	1880
Front projection	911
Rear projection	740

Rear door (mm)

Width	1231
Height	1250

Sliding side door (mm)

Width	700
Height	1175

Load compartment (mm)

Length	2170
Width	1714
Width between wheel arches	1230
Height	1305
Altezza soglia di carico (a vuoto)	545

Load compartment capacity (m³)

Volume	4.2 - 4.6*
--------	------------

Weights

	Van								Van payload 750 kg	
Engine versions	95 MPI	120 T-Jet	75 - 90 MultiJet II	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II	120 T-Jet Natural Power	75 - 90 MultiJet II	100 - 105 MultiJet II	
Vehicle weight* (tare) (kg)	1315	1405	1415	1460	1460	1460	1520/1570 □	1406	1420	
Payload including driver (kg)	900	1005	1005	1005	1005	1005	980/910 □	750	750	
GVW (kg)	2215	2410	2420	2465	2465	2465	2500/2480 □	2156	2170	
Max. towable weight (kg)	1000	1000	1000	1300	1300	1500	1000	1000	1300	

Fuel consumption - Emissions

Engine versions	95 MPI	120 T-Jet	75-90 MultiJet II			90 MultiJet II	100 - 105 MultiJet II	135 MultiJet II	120 T-Jet Natural Power	
	E6	E6 S&S	E6	E5+ DPF S&S	E5+ 90 HP ECOJet DPF S&S Ecopack	E5+ DPF S&S	E5+ DPF S&S	E5+ ECOJet DPF S&S Ecopack	E5+ DPF	E6
Fuel	petrol	petrol	petrol	diesel	diesel	diesel	diesel	diesel	diesel	petrol
Urban consumption (l/100 km)	10.4	9.7	9.5	6.5	6.0	5.3	5.6	6.8	6.2	5.5
Extra-urban consumption (l/100 km)	5.8	5.9	5.9	4.2	4.3	4.0	4.7	4.7	4.6	4.3
Combined consumption (l/100 km)	7.5	7.3	7.2	5.0	4.9	4.5	5.0	5.5	5.2	4.7
CO ₂ emissions (g/km)	174	168	169	133	129	118	133	144	137	125
									154	173
										134

* With passenger seat folded down and swivel partition


▲ Referred to basic versions without optional equipment

■ With opt 422 (additional methane cylinder)

▼ (kg/100 km)

DOBLÒ CARGO

High roof short wheelbase

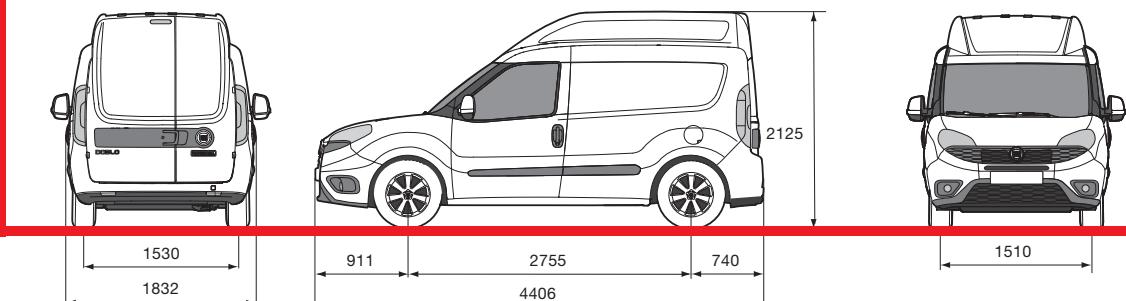

External dimensions (mm)

Wheelbase	2755
Length	4406
Width	1832
Front track	1510
Rear track	1530
Maximum height (unladen)	2125
Front projection	911
Rear projection	740

Rear door (mm)

Width	1231
Height	1455

Sliding side door (mm)

Width	700
Height	1175

Load compartment (mm)

Length	1820
Width	1714
Width between wheel arches	1230
Height	1550
Load threshold height (unladen)	545

Load compartment capacity (m³)

Volume	4.0 - 4.4*
--------	------------

Weights

	Standard van				Increased payload van				120 T-Jet Natural Power
	95 MPI	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II	95 MPI	120 T-Jet	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	
Engine versions	95 MPI	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II	95 MPI	120 T-Jet	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II
Vehicle weight * (tare) (kg)	1290	1393	1393	1420	1315	1405	1430	1430	1460
Payload including driver (kg)	750	750	750	750	900	1005	1005	1005	950
GVW (kg)	2040	2143	2143	2170	2215	2410	2435	2435	2444
Max. towable weight (kg)	1000	1300	1300	1500	1000	1000	1300	1300	1500

Fuel consumption - Emissions

Engine versions	95 MPI		90 MultiJet II Comfort-Matic		100 - 105 MultiJet II		135 MultiJet II	
	E6	E6 S&S	E5+ DPF S&S	E5+ DPF	E5+ DPF S&S	E5+ DPF S&S	E5+ ECOJet DPF S&S Ecopack	E5+ DPF
Fuel	petrol	petrol	diesel	diesel	diesel	diesel	diesel	diesel
Urban consumption (l/100 km)	10.2	9.4	5.6	7.1	6.3	5.8	7.3	
Extra-urban consumption (l/100 km)	5.9	5.9	5.2	5.1	5.1	4.7	5.2	
Combined consumption (l/100 km)	7.5	7.2	5.3	5.8	5.5	5.1	6	
CO ₂ emissions (g/km)	173	167	140	154	146	134	158	158


Fuel consumption - Emissions

Engine versions	95 MPI		120 T-Jet		90 MultiJet II Comfort-Matic		100 - 105 MultiJet II		135 MultiJet II		120 T-Jet Natural Power	
	E6	E6 S&S	E6	E6	E5+ DPF S&S	E6	E5+ DPF	E5+ DPF S&S	E5+ ECOJet DPF S&S Ecopack	E5+ DPF	E6	E6
Fuel	petrol	petrol	petrol	diesel	diesel	diesel	diesel	diesel	diesel	petrol	petrol	methane
Urban consumption (l/100 km)	10.2	9.4	9.5	5.6	7.1	6.3	5.8	7.3	7.3	9.7	6.5▼	
Extra-urban consumption (l/100 km)	5.9	5.9	6.4	5.2	5.1	5.1	4.7	5.2	6.5	4.2▼		
Combined consumption (l/100 km)	7.5	7.2	7.5	5.3	5.8	5.5	5.1	6.0	7.7	7.7	5.0▼	
CO ₂ emissions (g/km)	173	167	175	140	154	146	134	158	158	179	138	

* With passenger seat folded down and swivel partition

▲ Referred to basic versions without optional equipment

▼ (kg/100 km)

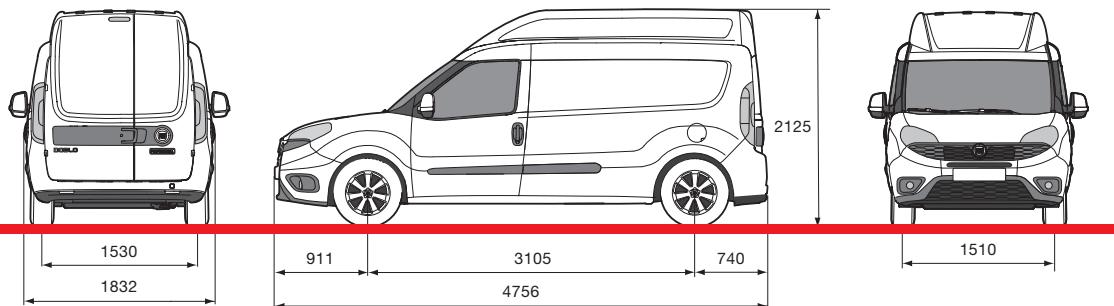

DOBLÒ CARGO XL

External dimensions (mm)

Wheelbase	3105
Length	4756
Width	1832
Front track	1510
Rear track	1530
Maximum height (unladen)	2125
Front projection	911
Rear projection	740

Rear door (mm)

Width	1231
Height	1455

Sliding side door (mm)

Width	700
Height	1175

Load compartment (mm)

Length	2170
Width	1714
Width between wheel arches	1230
Height	1550
Load threshold height (unladen)	545

Load compartment capacity (m³)

Volume	5.0 - 5.4*
--------	------------

Weights

Engine versions	120 T-Jet	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II
Vehicle weight ▲ (tare) (kg)	1475	1490	1490	1500
Payload including driver (kg)	1005	1005	1005	1005
GVW (kg)	2480	2495	2495	2505
Max. towable weight (kg)	1000	1300	1300	1500


Fuel consumption - Emissions

Engine versions	120 T-Jet	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II			135 MultiJet II
	E6	E5+ DPF S&S	E5+ DPF	E5+ DPF S&S	E5+ ECOJet DPF S&S ECOpak	
Fuel	petrol	diesel	diesel	diesel	diesel	diesel
Urban consumption (l/100 km)	9,7	5,7	7,1	6,4	5,7	7,4
Extra-urban consumption (l/100 km)	6,5	5,4	5,4	5,3	4,9	5,5
Combined consumption (l/100 km)	7,7	5,5	6,0	5,7	5,2	6,2
CO ₂ emissions (g/km)	179	145	158	150	137	163

* With passenger seat folded down and swivel partition
▲ Referred to basic versions without optional equipment

DOBLÒ CARGO

Work up

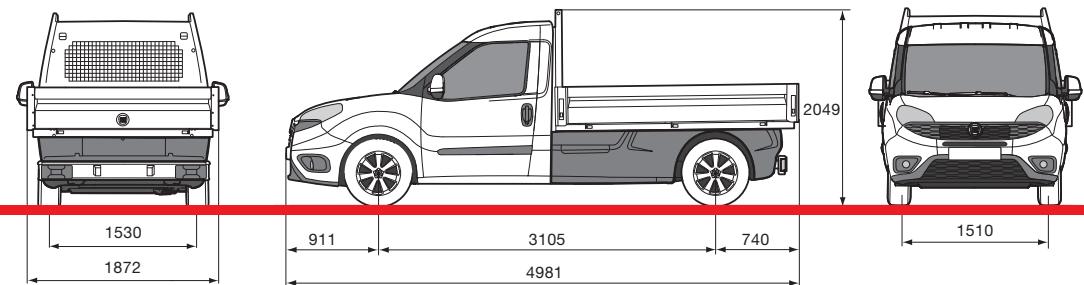

External dimensions (mm)

Wheelbase	3105
Length	4981
Width	1872
Front track	1510
Rear track	1530
Maximum height (unladen)	2049
Front projection	911
Rear projection	803

Load compartment (mm)

Length	2300
Width	1818
Side height	368
Load threshold height (unladen)	910

Surface area (m²)

Surface area	4.2
--------------	-----


Weights

Engine versions	75 - 90 MultiJet II	100 - 105 MultiJet II	135 MultiJet II Power
Vehicle weight ▲ (tare) (kg)	1430	1510	1510
Payload including driver (kg)	1000	1000	1000
GVW (kg)	2430	2510	2510
Max. towable weight (kg)	1000	1300	1500

Fuel consumption - Emissions

Engine versions	75 - 90 MultiJet II			100 - 105 MultiJet II			135 MultiJet II	
	E5+ DPF diesel	E5+ DPF S&S diesel	E5+ 90 HP ECOJet DPF S&S Ecopack diesel	E5+ DPF diesel	E5+ DPF S&S diesel	E5+ ECOJet DPF S&S Ecopack diesel	E5+ DPF diesel	E5+ DPF diesel
Fuel								
Urban consumption (l/100 km)	6.8	6.2	5.3	7.1	6.4	5.7	7.4	
Extra-urban consumption (l/100 km)	4.4	4.4	4	5.4	5.3	4.9	5.5	
Combined consumption (l/100 km)	5.3	5.1	4.5	6.0	5.7	5.2	6.2	
CO ₂ emissions (g/km)	140	133	118	158	150	137	163	

▲ Referred to basic versions without optional equipment

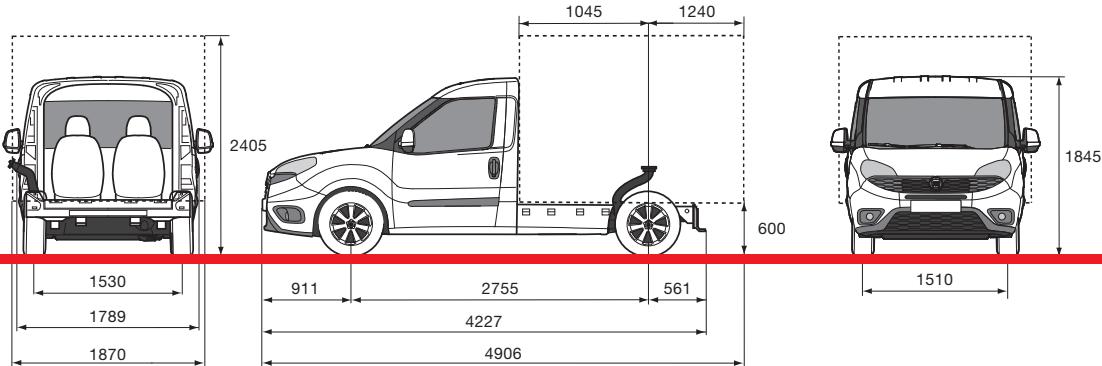

DOBLO CARGO

Chassis cab with platform short wheelbase

External dimensions (mm)

Wheelbase	2755
Length	4227
Width	1789
Front track	1510
Rear track	1530
Maximum height (unladen)	1845
Front projection	911
Rear projection	561
Chassis height (STD A)	600
Rear axle span flush with the body (finished trim level projection limit) *	1240
Rear axle span behind cab	1045

Platform (mm)	
Platform length	1606
Max. theoretical practicable length *	2285
Max. theoretical practicable width *	1870
Max. theoretical practicable height *	2405


Weights

Engine versions	95 MPI	75 - 90 MultiJet II	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II
Vehicle weight ▲ (tare) (kg)	1230	1270	1310	1310	1350
GVW (kg)	2210	2414	2454	2454	2494
Max. permitted weight on the front axle (kg)	1120	1120	1200	1200	1200
Max. permitted weight on the rear axle (kg)	1450	1450	1450	1450	1450
Max. towable weight (kg)	1000	1000	1300	1300	1500

* Depending on type of trim level and weight distribution on axles
▲ Referred to basic versions without optional equipment

DOBLÒ CARGO

Chassis cab with platform long wheelbase

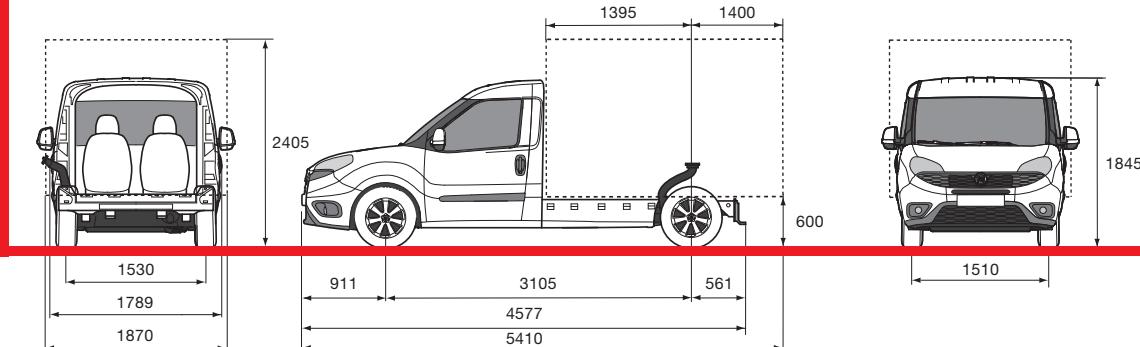

External dimensions (mm)

Wheelbase	3105
Length	4577
Width	1789
Front track	1510
Rear track	1530
Maximum height (unladen)	1845
Front projection	911
Rear projection	561
Chassis height (STD A)	600
Rear axle span • flush with the body (finished trim level projection limit)	1400
Rear axle span behind cab	1395


Platform (mm)

Platform length	1956
Max. theoretical practicable length •	2795
Max. theoretical practicable width •	1870
Max. theoretical practicable height •	2405

Weights

Engine versions	95 MPI	75 - 90 MultiJet II	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II
Vehicle weight (tare) ▲ (kg)	1245	1285	1325	1325	1365
GVW (kg)	2210	2440	2480	2480	2505
Max. permitted weight on the front axle (kg)	1120	1120	1200	1200	1200
Max. permitted weight on the rear axle (kg)	1450	1450	1450	1450	1450
Max. towable weight (kg)	1000	1000	1300	1300	1500

• Depending on type of trim level and weight distribution on axles
▲ Referred to basic versions without optional equipment

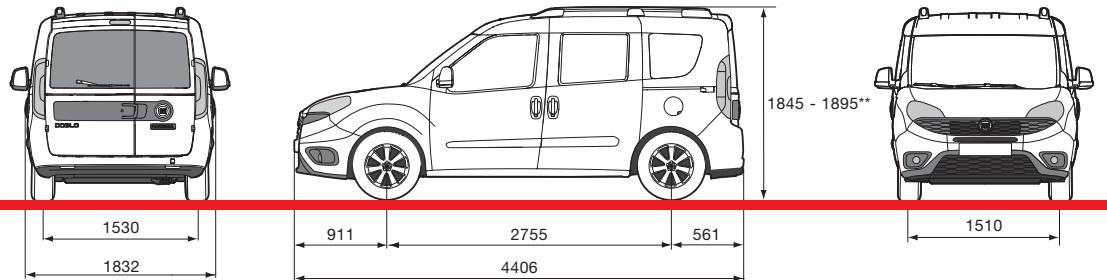

DOBLO CARGO

Combi short wheelbase

External dimensions (mm)

Wheelbase	2755
Length	4406
Width	1832
Front track	1510
Rear track	1530
Maximum height (unladen)	1845-1895**
Front projection	911
Rear projection	740

Luggage compartment (mm)

Length	950
Minimum width	1120
Maximum width	1195
Rear shelf level	600
Maximum height	1250

Luggage compartment capacity (litres)

Volume	790/3200*
--------	-----------

Weights

Engine versions	95 MPI	120 T-Jet	75 - 90 MultiJet II	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II	120 T-Jet Natural Power ▼
Vehicle weight ▲ (tare) (kg)	1374 - 1384 ■	1370	1434	1454	1454	1460 - 1554 ■	1560
Payload including driver (kg)	5p + 335 (+ 425 ■)	5p + 425	5p + 335 (+ 425 ■)	5p + 335 (+ 425 ■)	5p + 335 (+ 425 ■)	5p + 335 (+ 425 ■)	5 + 215
GVW (kg)	2084 - 2184 ■	2170	2144 - 2234 ■	2164 - 2254 ■	2164 - 2254 ■	2170 - 2354	2150
Max. towable weight (kg)	1000	1000	1000	1300	1300	1500	1000

Fuel consumption - Emissions

Engine versions	95 MPI	120 T-Jet	75 - 90 MultiJet II			90 MultiJet II Comfort-Matic	100 - 105 MultiJet II			135 MultiJet II	120 T-Jet Natural Power
	E6	E6 S&S	E6	E5+ DPF S&S	E5+ 90 HP ECOJet DPF S&S ECOpack	E5+ DPF S&S	E5+ DPF S&S	E5+ DPF S&S ECOpack	E5+ DPF	E6	
Fuel	petrol	petrol	petrol	diesel	diesel	diesel	diesel	diesel	diesel	petrol	methane
Urban consumption (l/100 km)	10.0	9.3	9.5	6.6	6.0	5.3	5.6	6.8	6.1	5.4	9.7
Extra-urban consumption (l/100 km)	5.9	5.9	5.9	4.3	4.3	4.0	4.7	4.7	4.7	4.4	6.1
Combined consumption (l/100 km)	7.4	7.2	7.2	5.1	4.9	4.5	5.0	5.5	5.2	4.8	7.4
CO ₂ emissions (g/km)	172	166	169	136	129	118	133	145	138	126	134 ▼

* With back seats folded down without partition tube.

▲ Referred to basic versions without optional equipment

■ Reinforced suspension with option 057

** Longitudinal bars with opt 357


Available in version with type approval M1

▼ (kg/100 km)

w = 75 kg

DOBLÒ CARGO

Combi maxi

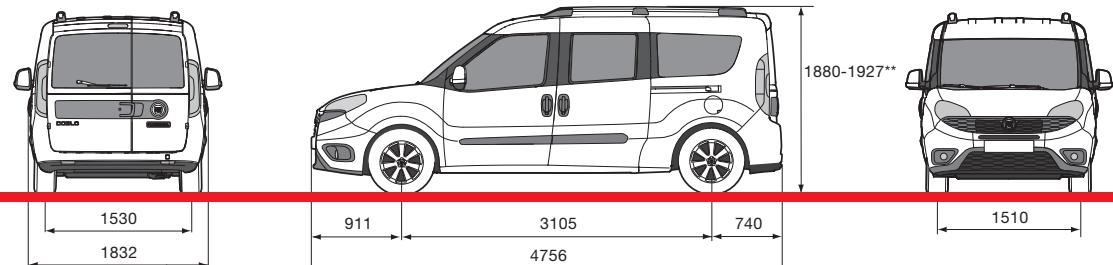

External dimensions (mm)

Wheelbase	3105
Length	4756
Width	1832
Front track	1510
Rear track	1530
Maximum height (unladen)	1880-1927**
Front projection	911
Rear projection	740

Luggage compartment (mm)

Length	1300
Minimum width	1191
Maximum width	1261
Rear shelf level	600
Maximum height	1250

Luggage compartment capacity (m³)

Volume	1050/4000*
--------	------------

Weights

Engine versions	95 MPI	120 T-Jet	75 - 90 MultiJet II	90 MultiJet II Comfort-Matic	100 - 105 MultiJet II	135 MultiJet II
Vehicle weight ▲ (tare) (kg)	1415	1465	1454	1549	1549	1564
Payload including driver (kg)	5p + 425	5p + 425	5p + 425	5p + 425	5p + 425	5p + 425
GVW (kg)	2215	2265	2254	2349	2349	2364
Max. towable weight (kg)	1000	1000	1000	1300	1300	1500

Fuel consumption - Emissions


Engine versions	95 MPI	120 T-Jet	75 - 90 MultiJet II		90 MultiJet II Comfort-Matic	100 - 105 MultiJet II		135 MultiJet II	
	E6	E6 S&S	E6	E5+ DPF S&S	E5+ 90 HP ECOJet DPF S&S ECOpack	E5+ DPF S&S	E5+ DPF S&S	E5+ DPF S&S	E5+ DPF S&S
Fuel	petrol	petrol	petrol	diesel	diesel	diesel	diesel	diesel	diesel
Urban consumption (l/100 km)	10	9,3	9,7	6,6	6,0	5,3	5,7	6,9	6,3
Extra-urban consumption (l/100 km)	5,9	5,9	6,1	4,3	4,3	4,0	4,8	4,9	4,8
Combined consumption (l/100 km)	7,4	7,2	7,4	5,1	4,9	4,5	5,1	5,6	5,4
CO ₂ emissions (g/km)	172	166	173	136	129	118	135	148	141

* With back seats folded down without partition tube.

** Longitudinal bars with opt 357

▲ Referred to basic versions without optional equipment

w = 75 kg

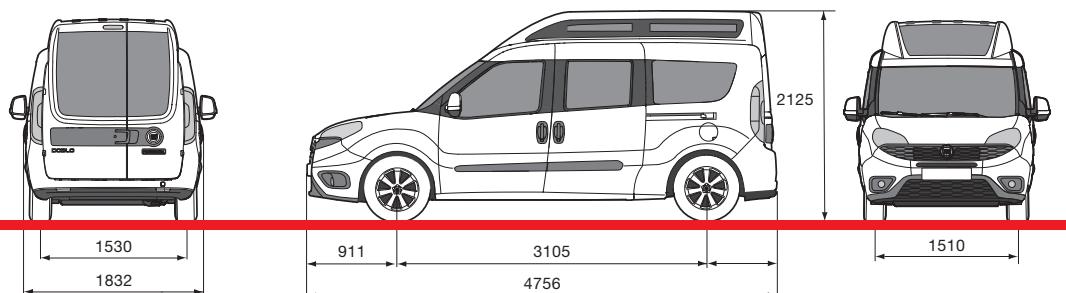

DOBLÒ CARGO Combi XL

External dimensions (mm)

	XL
Wheelbase	3105
Length	4756
Width	1832
Front track	1510
Rear track	1530
Maximum height (unladen)	2125
Front projection	911
Rear projection	740

Luggage compartment (mm)

Length	1300
Minimum width	1191
Maximum width	1261
Rear shelf level	600
Maximum height	1495

Luggage compartment capacity (m³)

Volume	1050/4800*
--------	------------

Weights

Engine versions	135 MultiJet II
Vehicle weight ▲ (tare) (kg)	1624
Payload including driver (kg)	5p + 425
GVW (kg)	2424
Max. towable weight (kg)	1500

Fuel consumption - Emissions

Engine versions	135 MultiJet Power E5+ DPF diesel
Fuel	
Urban consumption (l/100 km)	7.8
Extra-urban consumption (l/100 km)	5.5
Combined consumption (l/100 km)	6.3
CO ₂ emissions (g/km)	167

* With back seats folded down without partition tube.
▲ Referred to basic versions without optional equipment
w = 75 kg

Standard equipment and options

EXTERIOR

	VAN	SX VAN	CHASSIS CAB WITH PLAT-FORM	COMBI	COMBI SX	WORK UP
Side protection strips	927	●	●	●	●	●
Two asymmetric panelled rear swing doors		●	—	—	—	—
Two asymmetric glazed rear swing doors with heated rear window and wipers	519	○	○	—	●/○ (Maxi)	●/○ (Maxi)
Integral hub caps	878	●	●	●	●	●
15" alloy rims	108	○/- (Maxi)	○/- (Maxi)	—	○/- (Maxi)	○/- (Maxi)
16" alloy rims	431	○	○	—	○	—
Fog lights	097	○	○	○	●	○
Rear lights for platform	4EA	—	—	○	—	●
Front/rear splash guards	990	○	○	—	○	—
Rear splash guards	197	○	○	—	○	—
Front/rear body coloured bumpers	876	○	○	○	○	○
Window kit (fixed semi-glazed side section for van)	55D	○	○	—	—	—
Tinted rear windows	070	—	—	○	○	—
Right sliding side door	523	○/● (Maxi)	●	—	●	—
Left sliding side door	055	○	○	—	●	●
Third panelled window	526	●	●	—	○	—
Rear door with two blind wings for Combi versions	516	—	—	—	○	—
Glazed swing tailgate, heated rear window and rear window wiper (no XL)	148	○	○	—	○/● (Maxi)	○/● (Maxi)
Electric door mirrors	041	○	○	○	○	○
Manual exterior rear view mirrors	043	●	●	●	—	●
Electrically controlled electric folding door mirrors	341	○	○	○	○	○
Painted door mirrors	976	○	●	○	●	○
Metallic paintwork	210	○	○	○	○	○
Third brake light		●	●	●	●	—
Rear window on roof of load compartment	585	○/- (Maxi)	○/- (Maxi)	—	—	—
High roof (no 1.3 MJet)	360	○/- (Maxi) / ● (XL)	○/- (Maxi) / ● (XL)	○ (M1) / — (Maxi) / ● (XL)	○ (M1) / — (Maxi) / ● (XL)	—
16" alloy rims (only for versions without TPMS)	50902745	△	△	—	—	—

INTERIOR

Protective ladder for driver	194	○	○	—	—	—
Split swivel partition	201	○	○	—	—	—
Fixed tube partition for combined versions (N1 type-approval)	56K	—	—	—	○	○
Fixed metal partition	149	●	●	—	—	—
Fixed metal partition with central glass window	199	○	○	—	—	●
Complete partition for third seat (panel + grille)	7ET	○	—/● (SX 3-seater)	—	—	—
Driver side ladder for 3rd seat	7EU	○	—/● (SX 3-seater)	—	—	—
Sound-insulated partition	552	○	●	○	—	●
Lockable glove compartment on dashboard	658	○	●	○	—	○
Leather steering wheel and gear lever knob	320	○	○	○	○	○
Driver's seat with armrest, lumbar and height adjustment	627	○	—	○	○	○
Two-seater multifunctional bench	293	○	—/● (SX 3-seater)	—	—	—
Adjustable passenger seat with storage compartment in cushion	295	○	●	○	—	○
Passenger seat with adjustable backrest	297	○	○	○	●	●
Passenger seat, foldable to floor	4GQ	○	○	—	—	○
Passenger seat that folds down into a table	785		—	—	—	—
Heated driver's seat	453	○	○	○	○	○
Heated passenger seat	452	○	○	○	○	○
2nd row seats split, three-point seat belts and head restraint	195	—	—	—	●	●
Imitation leather upholstery	728	○	—	○	—	○
PVC load compartment mat	798	○	●	—	—	—
Luggage compartment mat		—	—	—	●	●
Luggage compartment curtain	104	—	—	—	○/● (Maxi)	○/● (Maxi)
Adjustable rigid parcel shelf for luggage compartment	209	—	—	—	○/— (Maxi)	○/— (Maxi)
Seat covers	71805886/87	△	△	△	△	△
Side deflectors	71805777	△	△	△	△	—
Rubber mats	50902913	△	△	—	—	—
Pressed felt mats with Doblo logo	50902915	△	△	△	△	△
Carpet mats with Doblo logo	71805925	△	△	—	—	—
PC/PL internal platform protection	50902464/65	△	△	—	—	—
PC/PL internal wall protection	50902466/2739	△	△	—	—	—
Protective internal glass grilles for rear swing doors	50902929	△	△	—	—	—

FUNCTIONAL / ELECTRIC

Remote control for door opening and locking	008	○	●	○	○	●	○
Additional remote control key	4YV	○	○	○	—	—	○
Power steering	014	●	●	●	●	●	●
Height and reach-adjustable steering wheel	011	●	●	●	●	●	●

NEW DOBLÒ CARGO

Cargo



Cargo



Cargo
with sliding door



Cargo
with 2 sliding doors



Cargo semi-glazed



Cargo semi-glazed
with sliding door



Cargo semi-glazed
with 2 sliding doors



Cargo glazed
with 2 sliding doors

Cargo Maxi



Cargo Maxi
with sliding door



Cargo Maxi
with 2 sliding doors



Cargo Maxi semi-glazed
with sliding door



Cargo Maxi semi-glazed
with 2 sliding doors



Cargo Maxi glazed
with 2 sliding doors

Cargo High Roof



Cargo High-roof



Cargo High-roof
with sliding door



Cargo High-roof
with 2 sliding doors



Cargo High-roof semi-glazed



Cargo High-roof semi-glazed
with 2 sliding doors



Cargo High-roof glazed
with 2 sliding doors

Cargo XL



Cargo XL
with sliding door



Cargo XL
with 2 sliding doors



Cargo XL semi- glazed
with sliding door



Cargo XL semi-glazed
with 2 sliding doors



Cargo XL glazed
with 2 sliding doors

Flatbed



Flatbed



Flatbed Maxi

Combi



Combi
with 2 sliding doors



Combi semi-glazed
with 2 sliding doors



Combi Maxi
with 2 sliding doors



Combi Maxi semi-glazed
with 2 sliding doors



Combi XL
with 2 sliding doors



Combi Maxi semi-glazed
with 2 sliding doors

Work Up



Work Up



Twin blind rear door



Twin glazed rear door



Glazed tailgate



Twin blind rear door



Twin glazed rear door