


LABEL



**BERNARD<sup>®</sup>  
CONTROLS**

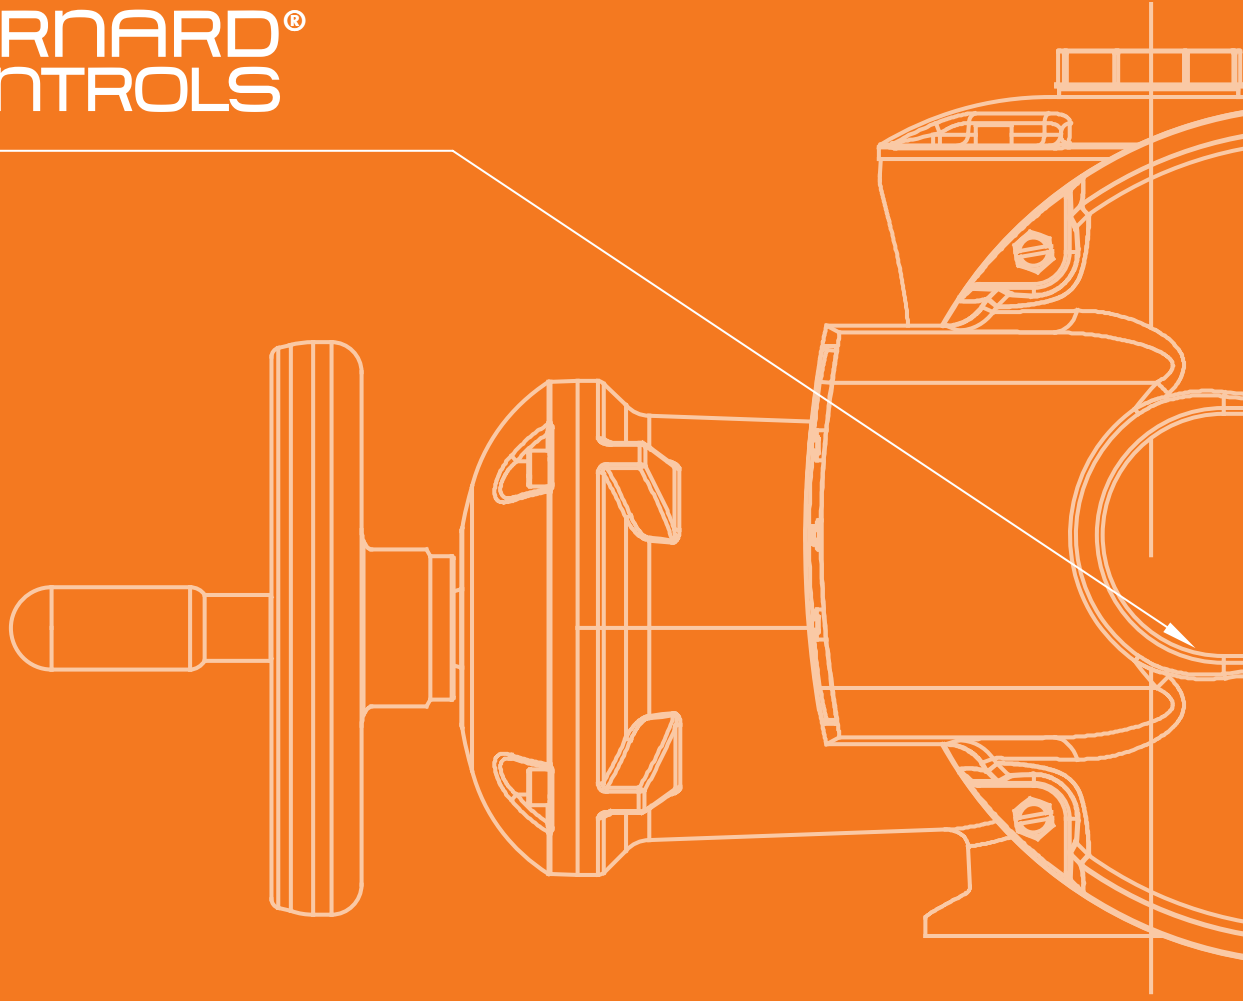

//////// Invest in Confidence //////////////////////////////////////

**New**

Weatherproof  
Multi-turn Actuators  
**AT RANGE**

# > AT range

## The essentials

for multi-turn electric actuation



AT3 - AT6L - AT6 - AT14 - AT25 - AT50  
SWITCH & LOGIC versions

AT7  
SWITCH & LOGIC version

## Product overview

### Wide Stem Acceptance

- > suitable for rising stem thanks to a removable screw cap
- > easy & watertight fixation of the stem cover



### Declutch-free handwheel

- > with motor priority
- > with foldable handle
- > optional dual speed and motorization



### Two possible positions for the cover



### Heavy duty design

Full aluminium enclosure protected by durable powder coating Grey & Champagne!



### User-friendly local commands

through 2 buttons + 1 padlockable selector

### New mobile application BC App

"Set up your actuator and more in a few clicks!"

- > Set up & Operate your actuator using your mobile phone
- > Get access to clear descriptions of alarms, troubleshooting functions, documentation, Bernard Controls Assistance
- > Upload & change the full actuator configuration in one step
- > Even complex settings are made easier



### Mechanical position indicator option

> On SWITCH VERSION:  
Easy & quick customization of color indication & orientation from the outside



### Large LCD display

Easily orientable in few clicks on the BC APP or through local commands

## Product benefits

### • Innovative, reliable & unique design

- > Product architecture & torque range adapted to customers' requirements: 7 models from 12 to 500 Nm
- > Selection of the essential features to ensure a competitive but performing solution: actuator duty from On-Off to Modulating, heavy duty enclosure protection, IP68, integrated control, wide range of output speeds...
- > New reliable camblock system unaffected by vibrations. Fully new & unique design with internal modularity for compact solution, e.g. modular position sensor enables up to 1700 turns with the same product

### • Performance for multi-turn actuation

- > From 12Nm to 500Nm (direct) and more with gearboxes
- > Wide range of speeds to address all types of applications
- > Wide stem acceptance
- > Self-locking at all speeds without any additional component\*
- > S4 Motor Service Duty on all models
- > Suitable for modulating applications (BC Class III complying with EN15714-2 Class C)

### • Easy to install

- > Easy commissioning: set up of travel limitation system (new camblock)

with a standard screwdriver (similar to FIRST BC AQ range), only two standard tools required to install and set up the actuator on valve, wiring reduced to the minimum for fast assembly

- > Large LCD display on LOGIC version for user-friendly commissioning and local command. Easily orientable (4-way direction) in few clicks
- > Product suitable for rising stem thanks to adjustable torque sensor from 40 to 100%

### • Easy to maintain

- > Declutch-free manual override for quick intervention on site
- > Mechanical position indicator as an option on SWITCH versions: check the position of your valve at a glance
- > BC APP: Bernard Controls new mobile application for setting, operating, troubleshooting and easy access to documentation

### • The main functions of integrated control with the new LOGIC control (v2)

- > Turn-key, time & cost-saving solution
- > User-friendly & intuitive
- > Non-intrusive setting for enhanced safety and reliability
- > Compatible with common fieldbus protocols: Modbus RTU, Profibus DPV1.
- > Bluetooth communication (as standard) to communicate with Bernard Controls' BC App

### Range Overview

A new range of multi-turn electric actuators made up of 7 models with or without integrated controls



#### AT SWITCH

AT3-AT6L-AT7-AT6-AT14-AT25-AT50

- 1x110 VAC 50Hz
- 1x115/120 VAC 60Hz
- 1x220/230 VAC 50/60Hz
- 3x200/220 VAC 50/60Hz
- 3x230 VAC 50/60Hz
- 3x240 VAC 50Hz
- 3x360 VAC 60Hz
- 3x380/400 VAC 50/60Hz
- 3x415/550 VAC 50Hz
- 3x440 VAC 50/60Hz
- 3x460/480 VAC 60Hz
- 3x575/660 VAC 60Hz
- 3x600 VAC 50/60Hz
- Other voltages on request

On-Off Class A as standard

#### > OPTIONS

- + Low temp. -40°
- + Class B
- + Class III
- + Position potentiometer (1000 Ω)
- + Analog Transmitter (4-20mA)
- + Name Plate 316L
- + Mechanical position indicator



#### AT LOGIC

AT3-AT6L-AT7-AT6-AT14-AT25-AT50

- 1x110 VAC 50Hz
- 1x115/120 VAC 60Hz
- 1x220/230 VAC 50/60Hz
- 3x200/220 VAC 50/60Hz
- 3x230 VAC 50/60Hz
- 3x240 VAC 50Hz
- 3x360 VAC 60Hz
- 3x380/400 VAC 50/60Hz
- 3x415/550 VAC 50Hz
- 3x440 VAC 50/60Hz
- 3x460/480 VAC 60Hz
- 3x575/660 VAC 60Hz
- 3x600 VAC 50/60Hz
- Other voltages on request

On-Off Class A as standard

#### > OPTIONS

- + Low temp. -40°
- + Class B
- + Class III
- + Analog Positioner
- + Position & Torque Transmitter
- + 4 additional signaling relays
- + Profibus DPV1
- + Modbus RTU
- + Name Plate 316L
- + Padlockable HMI protection



### Contents

Product specifications - AT SWITCH .....	4
Product specifications - AT LOGIC .....	6

# AT SWITCH

## PRODUCT SPECIFICATIONS

<b>GENERAL</b>	<b>Description</b>	All AT actuators include motor with thermal protection, gear case, emergency handwheel, travel limit switches, torque switches and anti-condensation heater. Wide range of number of turns: 4 to 1695 turns
	<b>Torque range</b>	<ul style="list-style-type: none"> <li>• AT3 = 12 to 30 Nm</li> <li>• AT6L = 24 to 60 Nm</li> <li>• AT6 = 24 to 60 Nm</li> <li>• AT7 = 28 to 70 Nm</li> <li>• AT14 = 56 to 140 Nm</li> <li>• AT25 = 100 to 250 Nm</li> <li>• AT50 = 200 to 500 Nm</li> </ul>
	<b>Duty Classification</b>	Adapted to process requirements: <ul style="list-style-type: none"> <li>• On-Off : Class A actuators complying with EN15714-2</li> <li>• Inching/Positioning: Class B actuators complying with EN15714-2</li> <li>• Modulating: Class III actuators with higher duty performance and specification of additional performance criteria compared to EN15714-2 Class C basic design requirements</li> </ul>
<b>ENCLOSURE - PROTECTION</b>	<b>Casing</b>	<ul style="list-style-type: none"> <li>• Aluminium casting</li> <li>• Cover fastened by captive and stainless screws</li> </ul>
	<b>External Protection</b>	<ul style="list-style-type: none"> <li>• Type: Polyester based powder coating as standard</li> <li>• Protection: standard tested to C4 environments acc. to ISO 12944, up to C5 as an option.</li> <li>• Durability (M) : 10 years</li> <li>• Color: Grey &amp; Champagne</li> </ul> Other colors and finishes, please consult us
	<b>Weatherproofness</b>	IP68 NEMA 4X as standard <i>Relative humidity: 0 to 95%.</i>
	<b>Ambient temperature range</b>	<ul style="list-style-type: none"> <li>• -20...+70°C / -4 ... +158°F</li> <li>• -40°C (-40°F) as an option</li> </ul> Other temperatures, please consult us
	<b>Vibration resistance</b>	1g (9.8 m/s <sup>2</sup> ) at 10-200 Hz. (Contact our sales teams for higher vibration levels)
<b>MOTOR</b>	<b>Motor technology</b>	<ul style="list-style-type: none"> <li>• TENV design (Totally-enclosed, not ventilated) 3-phase or single-phase asynchronous motor, Class F insulation and Class B temperature rise; integrated thermal overload protection.</li> <li>• TENV DC motors with 2-wire connection available on request for some references</li> </ul>
	<b>Motor duty rating</b>	<ul style="list-style-type: none"> <li>• On/Off operation (complying with EN15714-2 Class A): S4-30% and S2-15min (as a standard)</li> <li>• Inching/Positioning (complying with EN15714-2 Class B): S4-30% motor duty rating. Up to 360 starts per hour at peak of operation. S4-50% as option.</li> <li>• BC Modulating Class III (complying with EN15714- 2 Class C): S4-50% motor duty rating. Up to 1 200 starts per hour at peak of operation. <i>(Voltage ±10%, Frequency ±2%)</i></li> </ul>
<b>MECHANICAL SPECIFICATIONS</b>	<b>Gear design</b>	<ul style="list-style-type: none"> <li>• Reduction by planetary gear and largely sized worm &amp; wheel</li> <li>• The gears are mechanically self-locking</li> </ul>
	<b>Manual emergency operation</b>	Handwheel does not rotate during motor operation. <ul style="list-style-type: none"> <li>• Automatic switch between manual and electrical. Priority to electric drive.</li> <li>• Manual control gear ratios: Standard ratio = between 11 and 55 depending on the model AT3 = ratio 30:1 AT3 = ratio 55:1 (speed 7 &amp; 10 rpm) AT6L = ratio 30:1 AT7 = ratio 1:1 AT6 = ratio 27:1 AT14 = ratio 27:1 AT25 = ratio 29:1 (speed ≤ 96rpm) AT25 = ratio 11:1 (speed &gt; 96rpm) AT50 = ratio 29:1 (speed ≤ 96rpm) AT50 = ratio 11:1 (speed &gt; 96rpm)</li> <li>• Maximum rim force to apply conform to EN 12570</li> <li>• Dual speed and motorization option for AT25 &amp; AT50</li> </ul>

## AT SWITCH

### PRODUCT SPECIFICATIONS

<b>MECHANICAL SPECIFICATIONS</b>	<b>Output flange</b>	Actuator flanges comply with ISO 5210 (see corresponding output flange spreadsheet p.9)
	<b>Lubrication</b>	The actuators are lubricated for the product lifetime and do not require any special maintenance.
<b>ELECTRICAL SPECIFICATIONS</b>	<b>Power supply</b>	Actuators can operate on a wide variety of power supplies (see detail on technical handbook): <ul style="list-style-type: none"> <li>• single-phase or 3-phase,</li> <li>• up to 480 V</li> <li>• 50 or 60 Hz</li> </ul>
	<b>Terminal compartment</b>	<ul style="list-style-type: none"> <li>• All control elements are directly connected to push type terminals</li> <li>• Internal and external earth ground rod.</li> <li>- up to 2,5mm<sup>2</sup> for Control terminal</li> <li>- up to 2,5mm<sup>2</sup> for Power terminal</li> </ul>
	<b>Conduit entries</b>	3 x M20 (or 3x3/4" NPT)
<b>POSITION &amp; TORQUE SENSORS</b>	<b>Travel limit systems</b>	<ul style="list-style-type: none"> <li>• Limit switches actuated by adjustable camblock</li> <li>• As standard: 4 SPDT switches (2 for Open, 2 for Close); 250VAC-5A/48VDC-5A (resistive load)</li> </ul>
	<b>Torque limiting system</b>	<ul style="list-style-type: none"> <li>• Direct mechanical torque measurement</li> <li>• Self maintained torque information</li> <li>• The torque limiting system is calibrated at the factory.</li> <li>• 2 switches as standard (1 in opening and 1 in closing); SPDT; 250VAC-5A/48VDC-5A under resistive load</li> <li>• Adjustable torque from 40 to 100% of max torque</li> </ul>
	<b>Position Transmitter (option)</b>	<b>POSITION TRANSMITTER OPTION:</b> <ul style="list-style-type: none"> <li>• 2 wires for 4-20mA Position Transmitter</li> <li>• POT 1000Ω</li> </ul>
<b>CONTROLS</b>	<b>Visual position indication (option)</b>	Mechanical position indicator
<b>SETTINGS</b>	<b>Actuator on valve settings</b>	Easy and quick setting of position and torque camblocks with a standard screwdriver
	<b>Application for mobile device</b>	BERNARD CONTROLS new mobile application is available as standard. BERNARD CONTROLS mobile interface allows the user to: <ul style="list-style-type: none"> <li>• assistance to commissioning on valve</li> <li>• access to the documentation relative to the selected actuator (enter the Serial number) or scan the QR code on the nameplate of the actuator</li> <li>• assistance to curative maintenance with a simple and efficient troubleshooting</li> <li>• access to BERNARD CONTROLS contact information according to the area concerned</li> </ul>
<b>CONFORMITY TO EC DIRECTIVES</b>	<b>Conformity to EC directives</b>	AT actuators comply with: <ul style="list-style-type: none"> <li>• directive 2004/108/EC Electromagnetic compatibility</li> <li>• directive 2006/95/EC Low voltage</li> <li>• the following harmonised standards: <ul style="list-style-type: none"> <li>EN 61000- 6-4: Generic emissions standard for industrial environments;</li> <li>EN 61000-6-2: Generic immunity standard for industrial environments;</li> <li>EN 60034-1: Rotating electrical machines; EN 60529: Degrees of protection provided by enclosures (IP ratings code)</li> </ul> </li> </ul>
<b>OPTIONS</b>	<b>On SWITCH version</b>	<ul style="list-style-type: none"> <li>• Low temp. -40°</li> <li>• Class B</li> <li>• Class III</li> <li>• Position potentiometer (1000 Ω)</li> <li>• Analog Transmitter (4-20mA)</li> <li>• Stainless steel name plate</li> <li>• C5 Protection</li> <li>• Mechanical position indicator</li> <li>• Dual speed and motorization option for AT25 &amp; AT50</li> </ul>



# AT LOGIC

## PRODUCT SPECIFICATIONS

<b>GENERAL</b>	<b>Description</b>	<p>All AT actuators include motor with thermal protection, gear case, emergency handwheel, position sensor, torque sensor and anti-condensation heater.</p> <p>AT LOGIC models also include:</p> <ul style="list-style-type: none"> <li>• integrated controls</li> <li>• built-in motor reversing starters</li> <li>• local commands with large LCD display</li> </ul> <p>Wide range of number of turns: 4 to 2450 turns.</p>
	<b>Torque range</b>	<ul style="list-style-type: none"> <li>• AT3 = 12 to 30 Nm</li> <li>• AT6L = 24 to 60 Nm</li> <li>• AT7 = 28 to 70 Nm</li> <li>• AT6 = 24 to 60 Nm</li> <li>• AT14 = 56 to 140 Nm</li> <li>• AT25 = 100 to 250 Nm</li> <li>• AT50 = 200 to 500 Nm</li> </ul>
	<b>Duty Classification</b>	<p>Adapted to process requirements:</p> <ul style="list-style-type: none"> <li>• On-Off: Class A actuators complying with EN15714-2</li> <li>• Inching/Positioning: Class B actuators complying with EN15714-2</li> <li>• Modulating: Class III actuators with higher duty performance and specification of additional performance criteria compared to EN15714-2 Class C basic design requirements</li> </ul>
<b>ENCLOSURE - PROTECTION</b>	<b>Casing</b>	<ul style="list-style-type: none"> <li>• Aluminium casting</li> <li>• Cover fastened by captive and stainless screws</li> </ul>
	<b>External Protection</b>	<ul style="list-style-type: none"> <li>• Type: Polyester based powder coating as standard</li> <li>• Protection: standard tested to C4, environments acc. to ISO 12944, up to C5 as an option.</li> <li>• Durability (M): 10 years</li> <li>• Color: Grey &amp; Champagne</li> </ul> <p>Other colors and finishes, please consult us</p>
	<b>Weatherproof</b>	<p>IP68 - NEMA 4X as standard</p> <p>Relative humidity: 0 to 95%.</p>
	<b>Ambient temperature range</b>	<ul style="list-style-type: none"> <li>• -20...+70°C / -4 ... +158°F</li> <li>• -40°C (-40°F) as an option</li> </ul> <p>Other temperatures, please consult us</p>
	<b>Vibration resistance</b>	<p>1g (9.8 m/s<sup>2</sup>) at 10-200 Hz.</p> <p>Contact our sales teams for higher vibration levels</p>
<b>MOTOR</b>	<b>Motor technology</b>	<ul style="list-style-type: none"> <li>• TENV design (Totally-enclosed, not ventilated) 3-phase or single-phase asynchronous motor, Class F insulation and Class B temperature rise; integrated thermal overload protection.</li> <li>• TENV DC motors with 2-wire connection available on request for some references</li> </ul>
	<b>Motor duty rating</b>	<ul style="list-style-type: none"> <li>• On/Off operation (complying with EN15714-2 Class A): S4-30% and S2-15min (as a standard)</li> <li>• Inching/Positioning (complying with EN15714-2 Class B): S4-30% motor duty rating. Up to 360 starts per hour at peak of operation. S4-50% as option.</li> <li>• BC Modulating Class III (complying with EN15714-2 Class C): S4-50% motor duty rating. Up to 1 200 starts per hour at peak of operation.</li> </ul> <p>(Voltage ±10%, frequency ±2%)</p>
<b>MECHANICAL SPECIFICATIONS</b>	<b>Gear design</b>	<ul style="list-style-type: none"> <li>• Reduction by planetary gear and largely sized worm &amp; wheel</li> <li>• The gears are mechanically self-locking</li> </ul>
	<b>Manual emergency operation</b>	<p>Handwheel does not rotate during motor operation.</p> <ul style="list-style-type: none"> <li>• Automatic switch between manual and electrical. Priority to electric drive.</li> <li>• Manual control gear ratios:</li> </ul> <p>Standard ratio = between 11 and 55 depending on the model</p> <p>AT3 = ratio 30:1            AT3 = ratio 55:1 (speed 7 &amp; 10 rpm)            AT6L = ratio 30:1            AT7 = ratio 1:1            AT6 = ratio 27:1            AT14 = ratio 27:1            AT25 = ratio 29:1 (speed ≤ 96rpm)            AT25 = ratio 11:1 (speed &gt; 96rpm) ...</p>

# AT LOGIC

## PRODUCT SPECIFICATIONS

<b>MECHANICAL SPECIFICATIONS</b>	<b>Manual emergency operation</b>	AT50 = ratio 29:1 (speed $\leq$ 96rpm) AT50 = ratio 11:1 (speed > 96rpm) <ul style="list-style-type: none"> <li>• Maximum rim force to apply conform to EN 12570</li> <li>• Dual speed and motorization option for AT25 &amp; AT50</li> </ul>
	<b>Output flange</b>	Actuator flanges comply with ISO 5210 (see corresponding output flange spreadsheet p.6)
	<b>Lubrication</b>	The actuators are lubricated for the product lifetime and do not require any special maintenance.
<b>ELECTRICAL SPECIFICATIONS</b>	<b>Power supply</b>	Actuators can operate on a wide variety of power supplies (see detail on technical handbook): <ul style="list-style-type: none"> <li>• single-phase or 3-phase</li> <li>• up to 480 V</li> <li>• 50 or 60 Hz</li> </ul>
	<b>Bluetooth</b>	Bluetooth (BLE 4.1) in standard
	<b>Terminal compartment</b>	<ul style="list-style-type: none"> <li>• All control elements are directly connected to push type terminals</li> <li>• Internal and external earth ground rod.</li> <li>- up to 1,5mm<sup>2</sup> for Control terminal</li> <li>- up to 2,5mm<sup>2</sup> for Power terminal</li> </ul>
	<b>Fuse protection</b>	Primary: 0,5A-500V Secondary: Two automatic resettable fuses
	<b>Conduit entries</b>	<ul style="list-style-type: none"> <li>• 3 x M20 + 2 x M16 (or 3 x 3/4" + 2 x 1/2" NPT)</li> </ul>
<b>POSITION &amp; TORQUE SENSORS</b>	<b>Travel limit systems</b>	<ul style="list-style-type: none"> <li>• Position: movement reading on the output shaft</li> <li>• Position sensor: Absolute encoder (Hall effect sensor)</li> </ul>
	<b>Torque limiting system</b>	<ul style="list-style-type: none"> <li>• Direct mechanical torque measurement</li> <li>• Self maintained torque information</li> <li>• Absolute encoder sensor (Hall effect sensor)</li> <li>• The torque limiting system is calibrated at the factory. It remains adjustable via LOGIC (non intrusive setting)</li> <li>• Non intrusive setting: Adjustable torque from 40 to 100% of max torque</li> </ul>
	<b>Position Transmitter (option)</b>	In current: maximum acceptable load of 600 Ohms (24VDC), must be supplied (12 to 32VDC) 2-wire or 3-wire connection
<b>CONTROLS</b>	<b>Control</b>	<ul style="list-style-type: none"> <li>• Isolated by opto-couplers</li> <li>• by Voltage: 10V to 60V; 90V to 250 VDC/AC (Current: 10mA at 24V)</li> <li>• by dry contacts (using actuator isolated 24 VDC supply)</li> <li>• Minimum pulse duration: 100ms</li> <li>• Time of rotational direction's change: 200ms</li> </ul>
	<b>Visual position indication</b>	A black & white LCD screen to display the position, the torque and alarms
	<b>Local command description</b>	<ul style="list-style-type: none"> <li>• 2 buttons + 1 padlockable selector</li> <li>• A large LCD screen to display the position, the torque and alarms and to perform the settings</li> <li>• Green/Red: Configurable LED for CLOSED/OPEN</li> </ul>
	<b>Power circuit</b>	Motor reversing starters (electromechanical controls for On-Off Class A / Inching-Positioning Class B / Modulating Class III)
	<b>Auxiliary power supply</b>	With external 24VDC supply
	<b>Signaling relay</b>	<ul style="list-style-type: none"> <li>• 3 latching relays</li> <li>- Contact configuration: normally open or normally closed</li> <li>- Minimum current 10mA at 5V</li> <li>- Maximum current 5A at 250V or 5A at 30VDC (resistive load)</li> <li>Relay 1: Valve open</li> <li>Relay 2: Valve closed</li> <li>Relay 3: Configurable relay</li> <li>• Additional 4 relays board as an option</li> </ul>
	<b>Fault relay</b>	<ul style="list-style-type: none"> <li>• Fault relay is pre-programmed (not configurable)</li> <li>• SPDT non-latching relay, in fault position when not supplied.</li> <li>• Minimum current 10mA at 5V</li> <li>• Maximum current 5A at 250VAC or 5A at 30VDC (resistive load)</li> </ul>

# AT LOGIC

## PRODUCT SPECIFICATIONS

<b>CONTROLS</b>	<b>Inching/Positioning &amp; Modulating control (option)</b>	<p>LOGIC Positioner: Signal configurations (with integrated analog output):</p> <ul style="list-style-type: none"> <li>• Standard input signal: 4-20 mA Position output signal: 4-20mA</li> <li>• Torque output signal: 4-20mA</li> </ul> <p>Other input signal (configurable): 0-20mA, 4-12mA, 12-20mA, 0-10V Other Position output signal (configurable): 2 wires: 4-20mA; 4-12mA; 12-20mA, 3/4 wires: 0-20mA; 4-20mA; 4-12mA; 12-20mA. Configurable input &amp; output signal (direct/reverse)</p> <p>Analogue Input: - in current: impedance of 260 Ohms - in voltage: impedance of 10 kOhms:</p> <p>Analogue Output: - in current: maximum acceptable load of 350 Ohms, external supply 12-32VDC</p>
	<b>Transmitter (option)</b>	<p>Position &amp; Torque transmitter in standard, Position output signal: 4-20mA Torque output signal: 4-20mA Other Position output signal (configurable): 2 wires: 4-20mA; 4-12mA; 12-20mA 3/4 wires: 0-20mA; 4-20mA; 4-12mA; 12-20mA Configurable signal (direct/reverse)</p> <p>Analogue Output: - in current: maximum acceptable load of 350 Ohms, external supply 12-32VDC</p>
<b>SETTINGS</b>	<b>Settings</b>	<p>Non-Intrusive settings All actuator settings and parameters are stored in a non-volatile EEPROM memory. Protection by password. Configurable via Local control; via BC Application as standard (to keep a high level of security, Bluetooth range is limited to 10m. With BC App, communication is encrypted and access is restricted with password.)</p>
	<b>Local settings</b>	<p>The LOGIC can be fully set via its local display and selectors Does not require any specific setting tool Local / Off / Remote selector is padlockable. Optional padlockable protection against sandy winds &amp; vandalism.</p>
	<b>Application for mobile device</b>	<p>BERNARD CONTROLS new mobile application is available as standard, with its bluetooth secured communication interface, and allows the user to:</p> <ul style="list-style-type: none"> <li>• Assistance to commissioning on valve</li> <li>• Simply set every parameters of the actuator (non-intrusive setting)</li> <li>• Command the actuator (open/close/stop) as a local control</li> <li>• Check at a glance an overview of the feedbacks information which are displayed on a large color screen of the mobile</li> <li>• Assistance to curative maintenance with a simple and efficient troubleshooting</li> <li>• Access to BERNARD CONTROLS contact information according to the area concerned</li> <li>• Access to the documentation relative to the selected and scanned actuator</li> <li>• Customize the actuator display</li> <li>• Log the Systems Alarms and Warnings</li> <li>• Duplicate one actuator configuration to another actuator</li> <li>• Check the actuator life operation</li> <li>• Select the suitable language among 14 available languages</li> <li>• Identify the actuator operated valve by its valve tag and location process</li> <li>• Track the last user connections for traceability and safety reasons</li> </ul>
<b>FIELDBUS</b>	<b>Profibus DP (option)</b>	Available with DPV1
	<b>Profibus DPV1 (option)</b>	<ul style="list-style-type: none"> <li>• PROFIBUS-DPV1 - RS 485</li> <li>• Baud rate: 9.6 kbit/s up to 1.5 Mbit/s (autodetection)</li> <li>• Communication protocol: PROFIBUS DPV1 slave-cyclic &amp; acyclic</li> <li>• Type of connection: single line</li> <li>• Cable specification: Profibus certified cable only</li> <li>• Line connection without repeater: <ul style="list-style-type: none"> <li>- Actuators per line: 31 max.</li> <li>- Line length: 1.2 km max. (0.75 mi)</li> </ul> </li> <li>• Line connection with repeaters: <ul style="list-style-type: none"> <li>- Number of repeaters per line: 9 max</li> <li>- 30 actuators and 1 Km max. per segment</li> <li>- Number of actuators per line with repeater: 120 maximum</li> <li>- Line length with 9 repeaters: 10.2 km max. (6.2 mi)</li> </ul> </li> <li>• Scan speed (30 units &amp; 1.2 km): 0.1s (at a baud rate of 93.75 Kbit/s)</li> <li>• Power supply: internal and isolated. 24VDC emergency power supply to refresh Open /Close position information in case of loss of electric supply</li> <li>• Technical approval: operability approved by PNO (Profibus Nutzer Organisation)</li> </ul>



## AT LOGIC PRODUCT SPECIFICATIONS

<b>FIELDBUS</b>	<b>Modbus (option)</b>	<ul style="list-style-type: none"> <li>• MODBUS RTU - RS 485</li> <li>• Transmission medium: 1 shielded pair cable</li> <li>• Functions: Half Duplex, asynchronous mode, multidrop</li> <li>• Baud rate: 1.2k to 115 Kbit/s</li> <li>• Format: 8 data bits, 1 stop bit, no parity</li> <li>• Communication protocol: Modbus (slave)</li> <li>• Modbus address: configurable by the actuator menu</li> <li>• Modbus loop (option operated with Master Station)</li> </ul>
<b>CONFORMITY TO EC DIRECTIVES</b>	<b>Compliance with EC Directives</b>	<p>AT actuators comply with:</p> <ul style="list-style-type: none"> <li>• directive 2004/108/EC Electromagnetic compatibility</li> <li>• directive 2006/95/EC Low voltage</li> <li>• the following harmonised standards:</li> <li>• EN 61000-6-4: Generic emissions standard for industrial environments;</li> <li>• EN 61000-6-2: Generic immunity standard for industrial environments;</li> <li>• EN 60034-1: Rotating electrical machines; EN 60529: Degrees of protection provided by enclosures (IP ratings code)</li> </ul>
<b>OPTIONS</b>	<b>Options LOGIC</b>	<ul style="list-style-type: none"> <li>• Position and torque feed-back (current loop)</li> <li>• Analog Positioner</li> <li>• Fieldbus interface</li> <li>• 4 additional signaling relays</li> <li>• Stainless steel name plate</li> <li>• C5 Protection</li> <li>• Padlockable HMI protection against sandy winds and vandalism</li> <li>• Dual speed and motorization option for AT25 &amp; AT50</li> </ul>

4/4

### Corresponding output flange

	C FORM / B3 / B4	A FORM / B1 / B2
<b>AT3 / AT6L / AT7</b>	F10	F07 and F10 / F07 et F10 (F05 on request)
<b>AT6 / AT14</b>	F10 or F14	F10 and F14
<b>AT25 / AT50</b>	F14 or F16	F14 or F16

////////// ACCESS TECHNICAL DATA

Scan the QR Code to access technical data such as motor data, dimensional drawings, wiring diagrams...



# Solutions Overview



## NEW RANGES OF ACTUATORS AQ, AQL, AQXL, AT & BT



## NEW MOBILE APPLICATION BC APP

The only application that allows not only to set up your actuator in a few clicks, but also to improve the reliability of your process thanks to key features and data for preventive maintenance. Compatible with our new controls: **LOGIC (v2)** & **INTELLI+® (v3)**

SCAN THE QR CODE  
& WATCH  
BCAPP VIDEO HERE



### WEATHERPROOF RANGES



#### The essentials

#### Quarter-turn AQL RANGE

- 15 to 70 Nm (direct mount)
- Type of Controls: > **Electromechanical SWITCH**
- BC Duty & Modulating Classification

On-Off **A** Inching Positioning **B**

- Environment:
  - > IP 68 / C4 (High paint protection option C5)
  - > T: -20°C ...+60°C



#### Quarter-turn AQ RANGE

- 50 to 10,000 Nm (up to 1000 Nm direct mount) | Up to 1,000,000 Nm on request
- Type of Controls: > **Electromechanical SWITCH**  
> **Smart LOGIC (v2)**
- BC Duty & Modulating Classification

On-Off **A** Inching Positioning **B** Modulating **III**

- Environment:
  - > IP 68 / C4 (High paint protection option C5)
  - > T: -20°C ...+70°C (Low T° option -40°C)



#### Multi-turn AT RANGE

- 12 to 500 Nm (direct mount) | Up to 32,000 Nm on request
- 10 to 180 rpm (direct mount)
- Type of Controls: > **Electromechanical SWITCH**  
> **Smart LOGIC (v2)**
- Wiring: > Screw Type Terminal
- BC Duty & Modulating Classification

On-Off **A** Inching Positioning **B** Modulating **III**

- Environment: > IP 68 / C4 (High paint protection option C5)  
> T: -20°C ...+70°C (Low T° option -40°C)
- Linear applications



FLEXIBLE & MODULAR

### WEATHERPROOF RANGES



#### The dedicated solutions

#### Multi-turn BT RANGE

- 30 to 500 Nm (direct mount) | Up to 32,000 Nm on request
- 10 to 180 rpm (direct mount)
- Type of Controls: > **Smart INTELLI+®(v3)**
- Wiring: **Double-sealing as standard**
  - > New terminal plate with pins for easy wiring
  - > Quick Connector

#### Advanced BC Duty & Modulating Classification

On-Off **A+** Inching Positioning **B+** Modulating **III+**

- Environment: > IP 68 / C4 (High paint protection option C5)  
> T: -20°C ...+70°C Low T° (Low T° option -40°C)
- Linear applications



FLEXIBLE & MODULAR

### SPECIAL REQUESTS

#### Quarter-turn SQ RANGE

- 45 to 10,000 Nm (up to 800 Nm direct mount) | Up to 1,000,000 Nm on request
- With type of Controls: > **Smart INTELLI+®(v2)** With Fieldbus Redundant ...  
> SIL2
- Wiring: Double-sealing with INTELLI+



#### Multi-turn ST RANGE

- 60 to 2,200 Nm (direct mount) | up to 20,000 Nm on request
- 10 to 120 rpm (direct mount) | High speed: up to 190 rpm (direct & <300Nm)
- With type of Controls: > **Smart INTELLI+®(v2)** With Fieldbus Redundant ...  
> SIL2



### EXPLOSIONPROOF RANGES

#### Quarter-turn & Multi-turn SQX & STX RANGES

- **SQX**: 80 to 800 Nm (direct) & up to 1,000,000 Nm on request
- **STX**: 25 to 2,200 Nm (direct) & up to 20,000 Nm on request
- Compliance with international explosionproof standards: ATEX, INMETRO, IEC-Ex, EAC-Ex, NEMA 7 & 9...
- Type of Controls:
  - > **Electromechanical SWITCH**
  - > **Hardwired**
  - > **Smart INTELLI+® (v2)**
  - > **SIL2**



- BC Duty & Modulating Classification

On-Off **A+** Inching Positioning **B+** Modulating **III**

- Environment: IP 68 / C3 up to C5-M / T: -20°C ...+70°C (low T° option: -60°C)
- Special configurations: Corrosion protection, Fire proofing, Extreme temperatures

### FAILSAFE RANGES

#### Quarter-turn Failsafe Actuators FQ RANGE

Fast and shock-free reliable spring-return technology during emergency operation

- BC Duty & Modulating Classification

On-Off **A** Inching Positioning **B** Modulating **III**

- Environment: IP 67 / C3 / T: -20°C ...+70°C (low T° option -40°C)

#### Failsafe Actuators FX RANGE

- Explosionproof versions ATEX-NEMA



#### Quarter-turn & Linear Failsafe FSeX RANGE

The complete combination of modern electrics and power of hydraulics

- BC Duty & Modulating Classification

On-Off **A** Inching Positioning **B** Modulating **III**

- Environment: IP 67 / C4 / T: -20°C ...+60°C
- ATEX-NEMA, SIL3




### NUCLEAR RANGES

#### Nuclear classified Actuators

- SQN & ST & SN & SD Nuclear qualified electric actuators

+ Full range of other Qualified Solutions: Quarter-turn, Multi-turn and Linear for inside & outside containment applications; Failsafe actuators

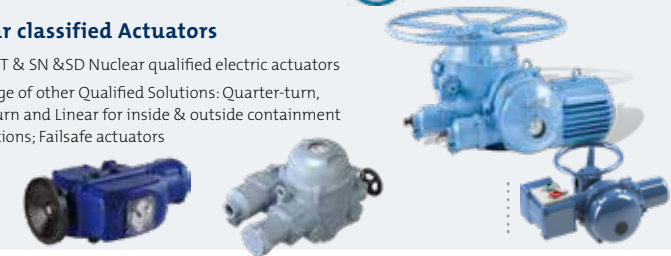

### EXPLOSIONPROOF RANGES

#### Quarter-turn AQXL RANGE

- 40 Nm and 70 Nm
- Compliance with international explosionproof standards: ATEX, IEC-Ex, NEMA 7...
- Type of Controls: > **Electromechanical SWITCH**
- BC Duty & Modulating Classification

On-Off **A** Inching Positioning **B**

- Environment: IP 68 / C4 (C5 on request) / T: -20°C ...+60°C
- Linear applications



### CUSTOMIZED DESIGN & PROJECTS:

At any time and anywhere on the globe, BERNARD CONTROLS teams are available for dedicated support. From the design stage to installation, commissioning, maintenance and training, our experts help you to define and implement the most appropriate solution to your specific needs thanks to our local R&D centers, test labs, calculation tools and training center.



### NEW GENERATION OF SMART CONTROLS



#### LOGIC (v2)

The main functions you expect from modern integrated controls

#### INTELLI+® (v3)

Advanced control solution for your critical applications!

# BERNARD CONTROLS GROUP

## CORPORATE HEADQUARTERS

4 rue d'Arsonval - CS 70091 / 95505 Gonesse CEDEX France / Tel. : +33 (0)1 34 07 71 00 / Fax : +33 (0)1 34 07 71 01 / mail@bernardcontrols.com

## CONTACT BY OPERATING AREAS

### > AMERICAS

#### NORTH AMERICA

BERNARD CONTROLS UNITED STATES  
HOUSTON

inquiry.usa@bernardcontrols.com  
Tel. +1 281 578 66 66

#### SOUTH AMERICA

BERNARD CONTROLS LATIN AMERICA  
inquiry.southamerica@bernardcontrols.com  
Tel. +1 281 578 66 66

### > ASIA

#### CHINA

BERNARD CONTROLS CHINA &  
BERNARD CONTROLS CHINA NUCLEAR  
BEIJING

inquiry.china@bernardcontrols.com  
Tel. +86 (0) 10 6789 2861

#### KOREA

BERNARD CONTROLS KOREA  
SEOUL

inquiry.korea@bernardcontrols.com  
Tel. +82 (0)2 2183 6226

#### SINGAPORE

BERNARD CONTROLS SINGAPORE  
SINGAPORE

inquiry.singapore@bernardcontrols.com  
Tel. +65 65 654 227

### > EUROPE

#### BELGIUM

BERNARD CONTROLS BENELUX  
NIVELLES (BRUSSELS)

inquiry.belgium@bernardcontrols.com  
inquiry.holland@bernardcontrols.com  
Tel. +32 (0)2 343 41 22

#### FRANCE

BERNARD CONTROLS FRANCE &  
BERNARD CONTROLS NUCLEAR FRANCE  
GONESSE (PARIS)

inquiry.france@bernardcontrols.com  
Tel. +33 (0)1 34 07 71 00

#### GERMANY

BERNARD CONTROLS DEUFRA  
TROISDORF (KÖLN)

inquiry.germany@bernardcontrols.com  
Tel. +49 2241 9834 0

#### ITALY

BERNARD CONTROLS ITALIA  
RHO (MILANO)

inquiry.italy@bernardcontrols.com  
Tel. +39 02 931 85 233

#### RUSSIA

BERNARD CONTROLS RUSSIA

inquiry.russia@bernardcontrols.com  
Tel. +33 (0)1 34 07 71 00

#### SPAIN

BERNARD CONTROLS SPAIN  
MADRID

inquiry.spain@bernardcontrols.com  
Tel. +34 91 30 41 139

### UNITED KINGDOM

BERNARD CONTROLS UNITED KINGDOM

inquiry.uk@bernardcontrols.com  
Tel. +44 (0)7435 266310

### > INDIA, MIDDLE EAST & AFRICA

#### AFRICA

BERNARD CONTROLS AFRICA  
ABIDJAN - IVORY COAST

inquiry.africa@bernardcontrols.com  
Tel. +225 21 34 07 82

#### INDIA

BERNARD CONTROLS INDIA

inquiry.india@bernardcontrols.com  
Tel. +971 4 880 0660

#### MIDDLE-EAST

BERNARD CONTROLS MIDDLE-EAST  
DUBAI - U.A.E.

inquiry.middleeast@bernardcontrols.com  
Tel. +971 4 880 0660

More than 50 agents and distributors worldwide. Contact details on [www.bernardcontrols.com](http://www.bernardcontrols.com)

BROCHURE\_AT\_ENG\_GRP\_rev03A  
This document and the contents here of are proprietary to Bernard Controls. It can be amended  
and changed without prior notice. Any unauthorized reproduction is strictly prohibited.