

Product Concept NS500


The KX-NS500 is the successor to the TDA100/100D for the SMB Market





Smart Hybrid System

The KX-NS500 has sufficient capacity for both legacy and IP ports, and an activation key or expansion cabinet can be used to easily expand the system according to customer needs.

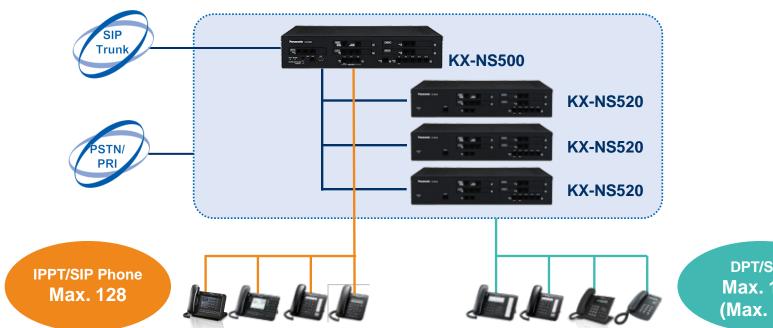

DPT/SLT Max. 130 (Max. 160*)

Maximum Trunks and Extensions

| Types | | Preinstalled | KX-NS500 | With 1 KX-NS520 | With 2 KX-NS520 | With 3 KX-NS520 |
|--------|--------------------|--------------|----------|--------------------|--------------------|--------------------|
| Legacy | Trunks | 6 ch | 36 ch | 66 ch | 96 ch | 126 ch |
| | Extensions (DXDP*) | 18 | 34 (40) | 66 (80) | 98 (120) | 130 (160) |
| IP | Trunks | N/A | 64 ch | 64 ch | 64 ch | 64 ch |
| | Extensions | N/A | 128 | 128 | 128 | 128 |

^{*} When Digital XDP is used.



Preinstalled Activation Key

The following type and number of activation keys are preinstalled or come with a 60-days free trial on the mother board.

Smart Hybrid PBX **KX-NS500**



Preinstalled Activation Key

Free Activation Key

CA Basic-Express for all users

60-days free trial

Unified Messaging

(UM/E-mail Client/Message

Backup/

Two-way Recording)

Mobile Extension

Communication Assistant

(CA PRO/CA Supervisor/CA

Operator Console/CA Thin Client

Server/CSTA Multiplexer)


3rd Party CTI interface

Call Centre Enhancement



Call Centre Solution


The KX-NS500 is designed to be used in call centre environments. Its built-in applications support the basic needs of supervisors at call center, such as Queue Announcement, Live Status Monitor, Activity Report, Automatic Conversation Recording, and NAS (Network Attached Storage).

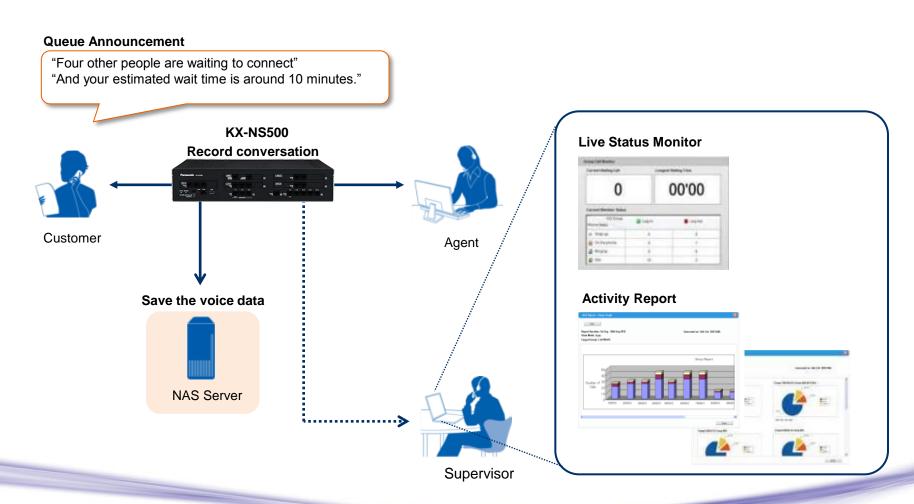



One Numbered Extension


Up to two extensions can be assigned the same extension number. For example, calls to an extension in the office can be received simultaneously on a softphone or a smartphone. Calls can also be switched between paired phones with a simple operation.

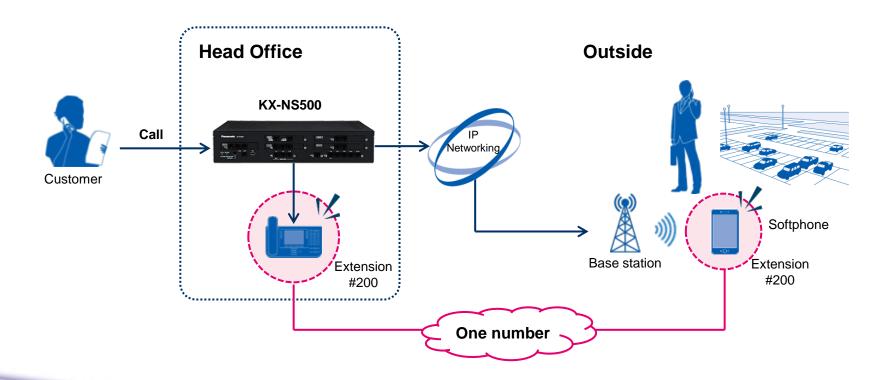




Simplified Maintenance

The installer can access KX-NS500 platforms using a web based console. Workloads are lighter than before with full maintenance functions, leading to reduced labor costs. Users can also use a web based console to configure terminals and the VM mailbox.

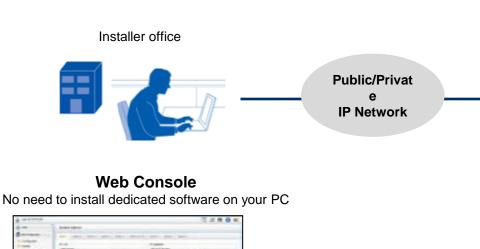



The programming method is basically same as the KX-TDA/TDW/NCP and KX-TVM. PTs programming is also available in the same way as the KX-TDA100D.

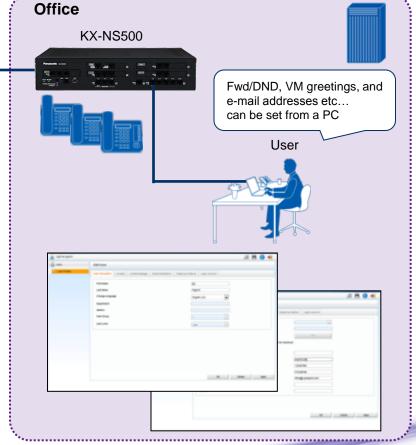



Built-in Voice Mail UC Server – Unified Communication

The KX-NS500 has a built-in messaging system that provides voice mail to subscribers. The Unified Messaging system can also provide voice guidance to outside callers, either directing them to their desired destination or to the mailbox of a subscriber, where they can leave a voice message.









Built-in

E-mail Notification Function

- Voice mail notification
- System alarm notification
- And more....

Smart Hybrid PBX **KX-NS500**



MS Outlook & IMAP4 Integration

- Microsoft Outlook plug-in
- IMAP4 protocol supported



Comparison with TDA/NCP/TDE Series

The KX-NS500 is more improved and varied than the KX-TDA/NCP/TDE series.


| Model No. | KX-NS500 | KX-TDA100D | |
|--------------------|---|--|--|
| Trunk Capacity | Legacy: Max 126 IP: Max 64 | Legacy: Max 106 | |
| Extension Capacity | Legacy: Max 160 IP: Max 128 | Legacy: Max 128 IP: Max 112 | |
| Voice Mail | Built-in VM functions (24ch/400h*) | Built-in ESVM | |
| Maintenance | Web console/ Proprietary telephone | PC maintenance console/ Proprietary telephone | |
| Eco Friendly | Eco mode (KX-UT/NT500 series), less power consumption compared to NCP/TDE | - | |

^{*} To expand the channel up to 24 channel, you need to DSP , AK , replace the storage memory card. To expand the recording time up to 400 hours, you need to replace the storage memory card.



System Connection Diagram

Existing Equipment from Panasonic and Trunks can continue to be used, and the legacy capacity can easily be expanded simply by connecting an Expansion Cabinet.

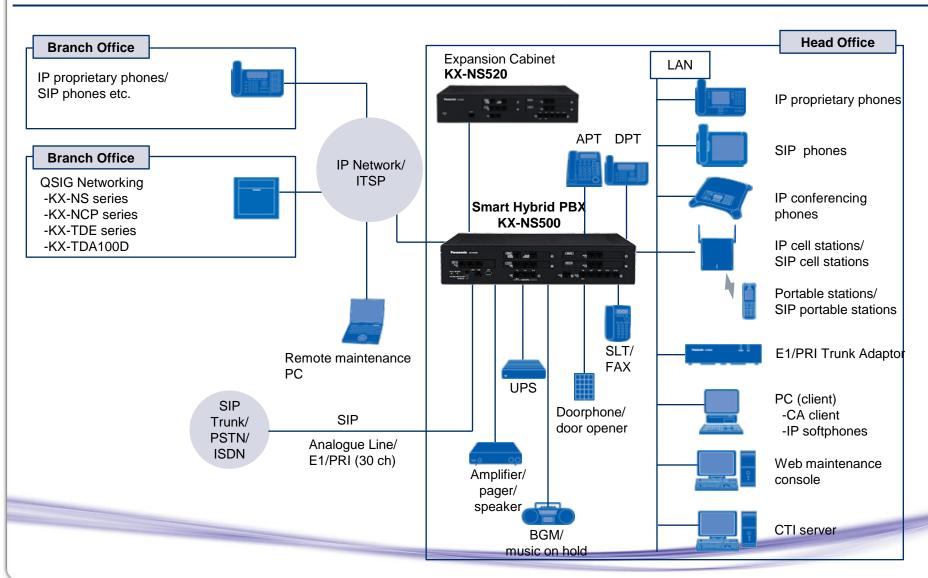

KX-NS500 Capacity

Maximum Terminal Equipment


| | | Туре | Preinstalled | KX-NS500 | With 1 KX-NS520 | With 2 KX-NS520 | With 3 KX-NS520 | |
|--------------------------|---------------------------------|----------------------------------|--------------|-----------|-----------------|-----------------|-----------------|--|
| Ext | Extensions (Legacy+IP) (DXDP*1) | | 18 | 162 (168) | 194 (208) | 226 (248) | 258 (288) | |
| | Legacy (DXDP*1) | | 18 (20) | 34 (40) | 66 (80) | 98 (120) | 130 (160) | |
| | | SLT | 16 | 32 | 64 | 96 | 128 | |
| | | DPT (DXDP*1) | 2 (4) | 18 (24) | 34 (48) | 50 (72) | 66 (96) | |
| | | APT | N/A | 8 | 16 | 24 | 32 | |
| | IP | | N/A | 128 | | | | |
| | IP-PT*2 | | N/A | 128 | | | | |
| SIP*3 N/A | | N/A | 128 | | | | | |
| CS | CS | | N/A | 20 | 24 | 28 | 32 | |
| | | PT-interface CS (2ch) / (8ch) | 2 / N/A | 4/2 | 8 / 4 | 12 / 6 | 16 / 8 | |
| | IP-CS/SIP-CS | | N/A 16 | | | | | |
| PS | | 128 | | | | | | |
| VIV | VM | | | | | | | |
| | Built-in SVM (ch) | | 2 | | | | | |
| Built-in UM N/A TVM unit | | Built-in UM | N/A | 24 | | | | |
| | | | 2 | | | | | |
| Do | Doorphone | | N/A | 2 | 4 | 6 | 8 | |
| Do | Door Opener | | N/A | 2 | 4 | 6 | 8 | |
| Ext | External Sensor | | N/A | 2 | 4 | 6 | 8 | |

^{*1} When Digital XDP is used. *2 KX-NT500/300 Series, KX-NT265 (software version 2.0 or later only). *3 KX-UT Series, KX-NT700 and third party SIP phones (SIP hard phones/SIP softphones).

Product Lineup - Hardware

Main Unit KX-NS500






- A. Front cover plate for the EXP-M Slot
- B. Front cover plates for Trunk/Doorphone Card Slots
- C. Front cover plates for the Extension Card Slots
- D. Extension Card Slot
- E. Trunk/Doorphone Card Slot
- F. EXP-M Card Slot
- G. SD Card Slot
- H. DSP Card Slot
- I. RMT Card Slot


| Component | | Model | Description | Installed in | |
|--------------------------|-----------------------|-------------|---------------------------------------|-------------------------|--|
| | DSP S (63 resources) | KX-NS5110 | VoIP DSP Card (S Type) | | |
| DSP | DSP M (127 resources) | KX-NS5111 | VoIP DSP Card (M Type) | DSP Card Slot | |
| | DSP L (254 resources) | KX-NS5112 | VoIP DSP Card (L Type) | | |
| Storage Memory | XS (40 hours) | KX-NS5134 | Storage Memory (XS Type) | Storage Memory Card Slo | |
| For VM, ACD Report, SMDR | S (200 hours) | KX-NS5135 | Storage Memory (S Type) | | |
| expansion | M (400 hours) | KX-NS5136 | Storage Memory (M Type) | | |
| | LCOT6 | KX-NS5180 | 6-Port Analogue Trunk Card | | |
| Trunk | PRI30/E1 | KX-NS5290CE | PRI30 / E1 Trunk Card | Trunk Slot | |
| | DPH2 | KX-NS5162 | Doorphone Interface Card | | |
| | DHLC4 | KX-NS5170 | 4-Port Digital Hybrid Extension Card | | |
| | DLC8 | KX-NS5171 | 8-Port Digital Hybrid Extension Card | | |
| Extension | DLC16 | KX-NS5172 | 16-Port Digital Hybrid Extension Card | Extension Slot | |
| | MCSLC8 | KX-NS5173 | 8-Port SLT Card | | |
| | MCSLC16 | KX-NS5174 | 16-Port SLT Card | | |
| Expansion Master Card | EXP-M | KX-NS5130 | 3-ports Expansion Master Card | EXP-M Slot | |
| Remote Modem | RMT | KX-TDA0196 | Remote Modem Card | RMT Slot | |



KX-NS500 The Hybrid IP Solution

One Page Sales Point

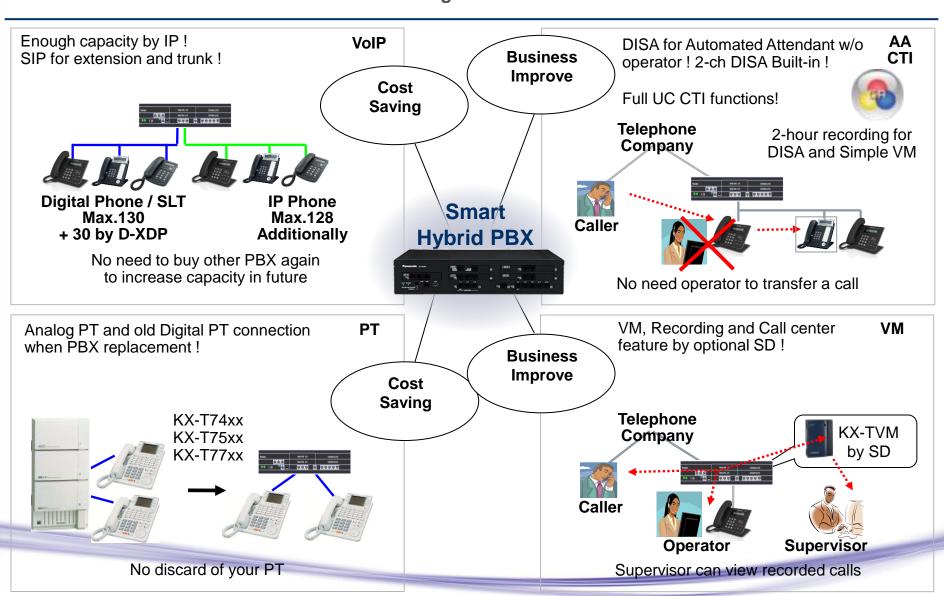

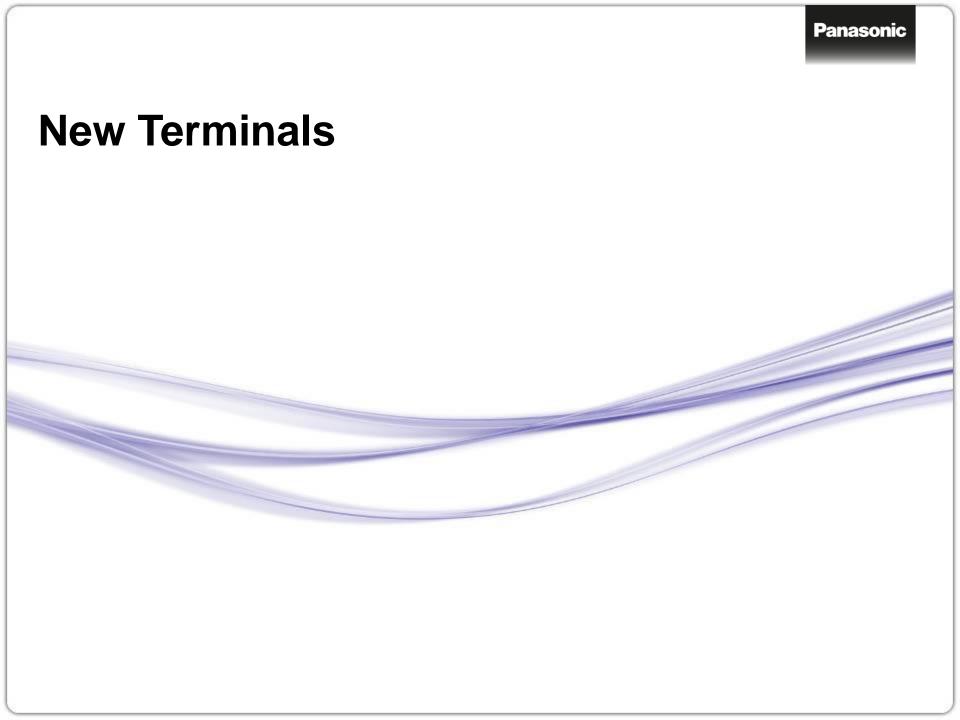

Overview

Panasonic's full terminal line up from high end to low end provide various solutions to various types of businesses.

Smart Hybrid PBX KX-NS500



Digital Proprietary Telephone

- Full duplex speaker phone
- Supports EHS for wireless headsets



IP Proprietary Telephone

- Gigabit LAN/PC port
- PoE
- Full duplex speaker phone
- Supports EHS for wireless headsets



Wireless Terminals

- Multifunctional design
- Seamless communication while you move from place to place during a call



Digital Phone 'KX-DT5xx Series'

Lineup

For Executives/Supervisors

KX-DT546 with KX-DT590

- 6-Line Backlight LCD Display
- 24 Flexible CO Buttons
- Full Duplex Speakerphone
- Electronic Hook Switch
- Options:
 KX-DT590 (Digital DSS console (48-Key)



For Standard Users

KX-DT543

- 3-Line Backlight LCD Display
- 24 Flexible CO Buttons
- Full Duplex Speakerphone
- Electronic Hook Switch
- Options:KX-DT590 (Digital DSS console (48-Key)



For Simple Users

KX-DT521

- 1-Line Backlight LCD Display
- 8 Flexible CO Buttons
- Full Duplex Speakerphone
- Options:
- KX-DT590 (Digital DSS console (48-Key)



A white model is available for each phone

Digital Phone 'KX-DT5xx Series'

KX-DT500 Terminals

The new terminals combine the functions of the KX-DT300 with new requirements from the market.

All Terminals available in black and white





Digital Phone 'KX-DT5xx Series'

Features

High Audio Quality

Full Duplex Speakerphone

The speakerphone supports "full duplex", enabling both parties to speak at the same time without their voice getting cut out.

Advanced speaker design

Speakers enhance the characteristics of low frequencies and contain a high performance D-class audio amp.

Larger acoustic chamber

The acoustic chamber reduces echo and vibration from the speaker.

Special material cone circle Acoustic chamber (acoustic box)


Hands free communication

Electronic Hook Switch (EHS) supported (KX-DT546/KX-DT543)

By connecting an EHS headset, you can perform wireless communication.

Easy to Use Design

Small footprint reduces desk space Longer handset curly cord







Longer handset curly cord

IP Phone 'KX-NT5xx Series'

Lineup

For Executives/Supervisors

KX-NT560

- 4.4 inch Backlight LCD Display
- 4 x 8 Self Labelling, Flexible CO Buttons
- 2 Giga Ethernet Ports (10/100/1000M)
- PoE
- Full Duplex Speakerphone
- Electronic Hook Switch
- Built-in Bluetooth Module
- Eco Mode

For Simple Users

KX-NT551

- 1-Line Backlight LCD Display
- 8 Flexible CO Buttons
- 2 Ethernet Ports (10/100/1000M)
- Full Duplex Speakerphone
- PoE
- Eco Mode



A white model is available for each phone

For Standard Users

KX-NT556/KX-NT553 with KX-NT505

- 6-Line Backlight LCD Display (KX-NT553: 3-Line)

(KX-NT553: 3-Line)
-12 x 3 Self Labelling, Flexible CO Buttons

(KX-NT553: 12 x 2) - 2 Ethernet Ports (10/100/1000)

- PoE
- Full Duplex Speakerphon
- Electronic Hook Switch
- Eco Mode
- Options: KX-NT505 (Add on 48 key module)

KX-NT546/KX-NT543

 6-Line Backlight LCD Display (KX-NT543: 3-Line)

- 24 Flexible CO Buttons

- 2 Ethernet Ports (10/100M)

- PoE
- Speakerphone
- Electronic Hook Switch
- Eco Mode



Digital Phone 'KX-NT5xx Series'

KX-NT500 Terminals

The new terminals combine the functions of the KX-NT300 with new requirements from the market.

All Terminals available in black and white



KX-NT551 Standard Phone KX-NT543 Business Phone KX-NT546 Business Phone

Digital Phone 'KX-NT5xx Series'

KX-NT500 Terminals

The new terminals combine the functions of the KX-NT300 with new requirements from the market.

All Terminals available in black and white



KX-NT553 Business Phone



KX-NT556 Advanced Phone



KX-NT560 Advanced Phone



IP Phone 'KX-NT5xx Series'

Features

High Audio Quality

Full Duplex Speakerphone (KX-NT560/KX-NT55x Series/KX-NT511)

The speakerphone supports "full duplex", enabling both parties to speak at the same time without their voice getting cut out.

Supports the G.722 codec

G.722 codec provides calls with high quality and reduced stress.

Advanced speaker design

Speakers enhance the characteristics of low frequencies and contain a high performance D-class audio amp.

Larger acoustic chamber

The acoustic chamber reduces echo and vibration from the speaker.

Hands free communication

Built-in Bluetooth (KX-NT560 only)

Bluetooth for wireless calls using a supported headset.

Electronic Hook Switch (EHS) supported (Except for KX-NT551/KX-NT511)

By connecting an EHS headset, you can perform wireless communication.





(acoustic box)



IP Phone 'KX-NT5xx Series'

Features

High Speed Communication

Supports Gigabit Ethernet (not KX-NT546/KX-NT543) Enables high-speed data transfer.

Easy to Use Design

Paper Label Free (KX-NT560/KX-NT556/KX-NT553) Since the numbers are displayed on the screen, a paper label is not required.

Small footprint reduces desk space

Longer handset curly cord





Paper label free



Small footprint

Longer handset curly cord



Lineup







- Noise Reduction
- Built in Bluetooth Headset interface (KX-TCA285/KX-TCA385)
- DECT Paging
- DECT for CTI
- Wireless XDP Parallel Function



Lineup

KX-TCA185

KX-TCA385



KX-TCA285

- Noise Reduction
- **Application Integration**
- Industry Thinnest and Rightest Body KX-TCA385
- Bluetooth KX-TCA285/385
- **IP65** KX-TCA385

Robustness Body (IEC60068-2-32) KX-TCA385

Panasonic's full terminal line up from high end to low end provide various solutions to various types of businesses.



Panasonic's full terminal line up from high end to low end provide various solutions to various types of businesses.



Panasonic's full terminal line up from high end to low end provide various solutions to various types of businesses.



NS500 IP-Communication server

Panasonic NS500 IP Communication Server, always the right choice!



Wireless Mobility







Full CA Integration (MS Outlook)



IP Enabled UT + NT5xx Series



Design & Functionality & Price New DT5xx series