

Peripheral Treatment with ePTFE



FlowLine BIPORE

- Specific BIPORE configuration with two different fibril lengths to ensure low thrombogenicity
- Additional ePTFE wrapping for enhanced suture retention and high burst strength*
- Unique guideline indicates diameter and wall thickness of the graft
- Helical reinforcement for increased resistance against kinking and compression
- Excellent and pliable handling and suture behaviour
- Simple and easy removal of the spiral reinforcement


Ordering Information

Thin Wall	Thin wall reinforced		
Catalog No.	Catalog No.	Ø (mm)	Length (cm)
10TW2006N	-	6	20
10TW5006N	10TW5006S	6	50
10TW8006N	10TW8006S	6	80
10TW2007N	-	7	20
10TW5007N	10TW5007S	7	50
10TW8007N	10TW8007S	7	80
10TW2008N	-	8	20
10TW5008N	10TW5008S	8	50
10TW8008N	10TW8008S	8	80

Standard wall	Standard wall reinforced		
Catalog No.	Catalog No.	Ø (mm)	Length (cm)
10SW2006N	-	6	20
10SW5006N	10SW5006S	6	50
10SW8006N	10SW8006S	6	80
10SW2007N	-	7	20
10SW5007N	10SW5007S	7	50
10SW8007N	10SW8007S	7	80
10SW5008N	10SW5008S	8	50
10SW8008N	10SW8008S	8	80



FlowLine BIPORE



FlowLine BIPORE Reinforced

* Bench test data on file at JOTEC GmbH. Data not indicative of clinical performance.

JT-BR-0100200-EN V02 08/2019

FlowWeave BIOSEAL




Woven vascular prostheses:

- Specific weaving techniques for high burst resistance and low dilatation^{1,2}
- Different internal and external surface structures enable blood flow optimization
- Aldehyde and isocyanate free BIOSEAL impregnation using dehydrothermal crosslinked collagen guarantees primary sealing of the blood in the prosthesis³
- Concentric crimping and the guide line allow precise positioning of the prosthesis
- Soft and supple texture for easy handling



PROSTHESIS REFERENCES

Catalogue No.	Ø (mm)	Length (cm)	Catalogue No.	Ø (mm)	Length (cm)
45ST1508	8	15	45ST3026	26	30
45ST3008	8	30	45ST1528	28	15
45ST1510	10	15	45ST3028	28	30
45ST3010	10	30	45ST1530	30	15
45ST1512	12	15	45ST3030	30	30
45ST3012	12	30	45ST1532	32	15
45ST1520	20	15	45ST3032	32	30
45ST3020	20	30	45ST1534	34	15
45ST1522	22	15	45ST3034	34	30
45ST3022	22	30			
45ST1524	24	15			
45ST3024	24	30			
45ST1526	26	15			

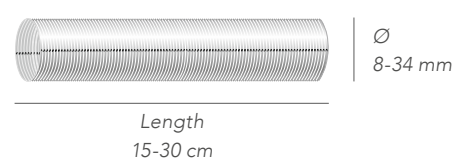

References:

¹ JOTEC GmbH, subsidiary of CryoLife, Inc.: Internal mechanical test data

² Bell C.-M.: [Study on the issue of expansion of textile implants] - (internal data, JOTEC GmbH)

³ Freischlag J, J.A. and Moore, W. S.: Clinical Experience with a Collagen-Impregnated Knitted Dacron Vascular Graft; *Ann of Vascular Surg* 1990; 4(5): 449-454

Indications: FlowWeave BIOSEAL is indicated in arterial aneurysms and vascular occlusions. The primary indication for FlowWeave BIOSEAL is vascular replacement in the thoracic and abdominal aortas, although it can also be used in peripheral vascular applications involving vessel diameters of at least 6 mm.

JOTEC GmbH,
a fully owned subsidiary of
CryoLife, Inc.

CryoLife France SAS
Paris – France

JOTEC Polska Sp. z o.o.
Warsaw – Poland

JOTEC Sales GmbH
Muri – Switzerland

CryoLife Europa, Ltd.
Guildford – United Kingdom

JOTEC s.r.l. Socio Unico
Milan – Italy

JOTEC Cardiovascular SL
Madrid – Spain

 Lotzenäcker 23
72379 Hechingen, Germany
P +49 (0)7471 922-0
F +49 (0)7471 922-100
info.europe@cryolife.com
www.jotec.com
www.cryolife.com

© 2018 JOTEC GmbH, Germany. All rights reserved.

JT-BR-0450200-EN V02 09/2018