

# BAYLAN



## WATER METERS

### BW WOLTMANN Type Cold Water Meters



#### GENERAL

- MID Certified
- IP68 protected dry type mechanism
- Suitable for all positions (Horizontal, Vertical, Inclined)
- Woltmann type design for industrial applications
- Low pressure loss, high sensitivity at initial flow
- Body internally/externally e/p powder painted
- Optical reading available • 3 years of warranty
- AMR reading features are optional
- Body made of Cast Iron GG25 with surface resistance to corrosion
- Comply with Standard BS 5728,
- Water temperature resistant up to 50°C
- Suitable for use in water supply
- Flanges comply with BS 4504
- Internal components suited to come into contact with drinking water
- Flanges drilled in accordance to DIN 2532/3 PN 16
- Service and spare parts available for 10 years

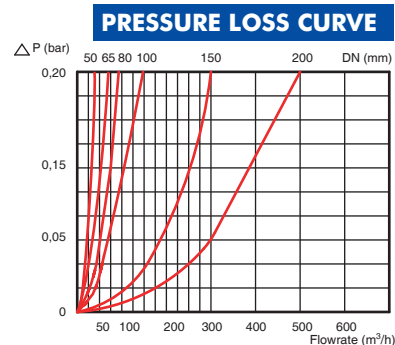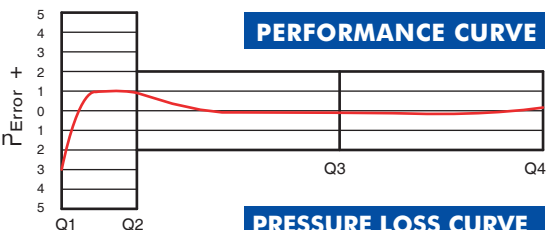

#### MAIN TECHNICAL DATA

Max. Water Temperature: 50°C - Max. Working Pressure: 16 bar

Q2 ≤ Q ≤ Q4 Maximum Permissible Error

Class 2 Water Meters; ±2% (Water Temp. ≤ 30°C), ±3% (Water Temp. > 30°C)

Class 1 Water Meters; ±1% (Water Temp. ≤ 30°C), ±2% (Water Temp. > 30°C)

Q1 ≤ Q < Q2 Maximum Permissible Error

Class 2 Water Meters; ±5% | Class 1 Water Meters; ±3%

Environmental Classes= Climatic : -10°C/+55°C - Mechanic: M1/O - Electromagnetic: E2

METER SIZE DIA (mm)	TYPE	Q3 / Q1	Q4 OVERLOAD FLOW	Q3 NOMINAL FLOW	Q2 TRANSITIONAL FLOW	Q1 MINIMUM FLOW	SMALLEST READING RESOLUTION	MAX. REGISTRATION CAPACITY
			m <sup>3</sup> /h					
50	BW-50	≤160	31,25	25	0,25	0,156	0,001	999999
65	BW-65	≤160	50	40	0,40	0,25	0,001	999999
80	BW-80	≤160	78,75	63	0,63	0,393	0,001	999999
100	BW-100	≤160	125	100	1,00	0,625	0,001	999999
125	BW-125	≤160	200	160	1,60	1,00	0,001	999999
150	BW-150	≤160	312,5	250	2,50	1,562	0,01	9999999
200	BW-200	≤160	500	400	4,00	2,50	0,01	9999999

#### DIMENSIONS & WEIGHTS

METER SIZE DIA (mm)	TYPE	L LENGTH	B WIDTH	H HEIGHT	CONNECTING FLANGE			UNIT WEIGHT (Without Flange) (kg)	PACKAGE WEIGHT (With Flange) (kg)
					D2 (mm) FLANGE DIA	D1 (mm) FLANGE HOLE CENTER	CONNECTION BOLT (PCS-DIA)		
50	BW-50	200	165	190,2	165	125	4 - M16	7,80	12,32
65	BW-65	200	185	200	185	145	4 - M16	9,12	14,35
80	BW-80	225	199,5	234	200	160	8 - M16	13,46	19,55
100	BW-100	250	220	244	220	180	8 - M16	14,23	21,60
125	BW-125	275	250	286	250	210	8 - M16	20,10	32,00
150	BW-150	300	285	304	285	240	8 - M20	30,00	42,50
200	BW-200	350	340	375	340	295	12 - M20	35,20	53,20

"Due to continuous development of our products, we reserve the right to modify our product design or construction without prior notice."