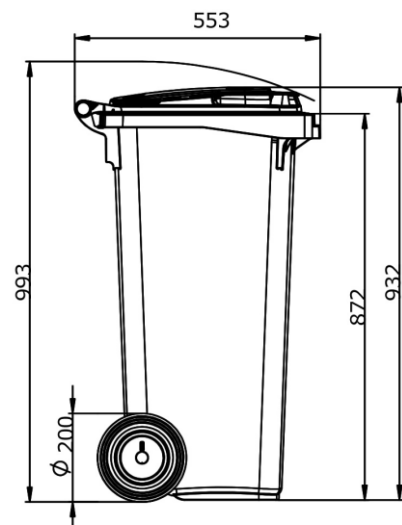
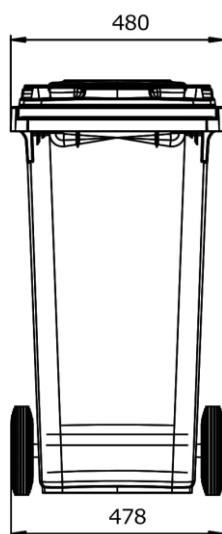


TECHNICAL DATA

Volume (L):	120
Curb weight approx. (kg):	8
Perm. total weight max. (kg):	60
Material:	HDPE, UV-stabilized
Wheels:	2 rubber wheels Ø 200 mm corrosion free steel axle
Lid / Container:	2 hinge pins continuous handle: approx. Ø 27 mm Lid with continous lip handle and additional bow handles
Certification:	EN 840, RAL GZ 951/1




OPTIONS

- Locking versions
- Lid apertures
- Hood apertures
- Security insert / CD insert
- **Markings / Identification**
- Clip-Variants
- Noise reduction
- Volume reduction
- Bio features
- Special features / Accessories






The products do not contain any substances on the SVHC list of the European Chemicals Agency (ECHA).

Options


Locking versions




Lid apertures




Hood apertures



Security insert / CD insert




Markings / Identification

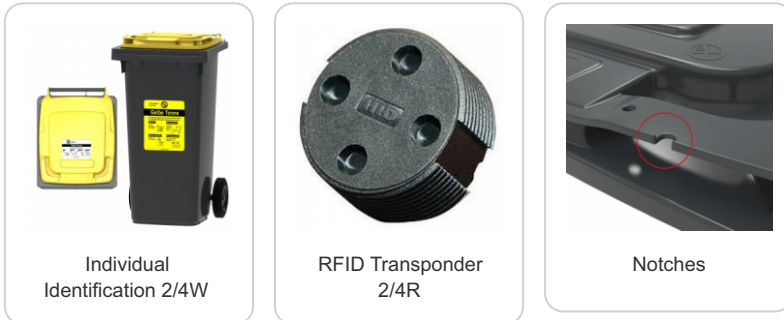

Clip-Variants





Noise reduction

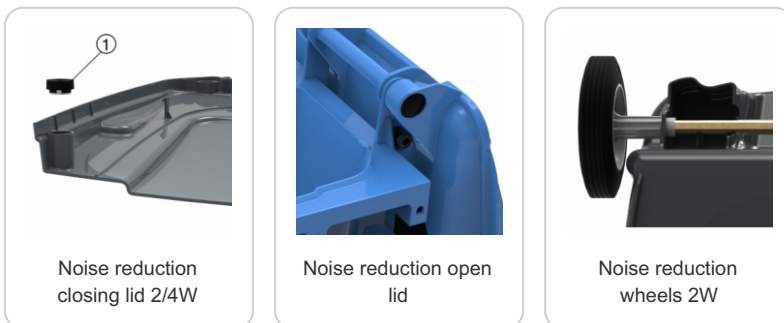

Volume reduction



Bio features



Special features / Accessories

